



Workshop Manual

Bora 1999 > , Bora Variant 1999 > ,
Golf 1992 > , Golf 1998 > ,
Golf 2004 > , Golf Cabrio 1994 > ,
Golf Cabrio 1998 > , Golf GTI 2005 > ,
Golf Plus 2005 > , Golf Variant 1992 > ,
Golf Variant 1998 > ,
Golf Variant 2007 > , Lupo 1999 > ,
Lupo 3L 1999 > ,
New Beetle RSI 2001 > , Passat 1994 > ,
Passat 1997 > , Polo 1995 > ,
Polo 2002 > , Polo Classic 1996 > ,
Polo Variant 1998 > , Sharan 1996 > ,
Touareg 2003 > , Vento 1992 >

Wheels and Tyres Guide - Archive

Edition 06.2010



List of Workshop Manual Repair Groups

Repair Group

44 - Wheels, tyres, vehicle geometry

Technical information should always be available to the foremen and mechanics, because their careful and constant adherence to the instructions is essential to ensure vehicle road-worthiness and safety. In addition, the normal basic safety precautions for working on motor vehicles must, as a matter of course, be observed.

All rights reserved.
No reproduction without prior agreement from publisher.



Contents

44 - Wheels, tyres, vehicle geometry	1
1 General notes on wheels and tyres (passenger cars)	1
2 Legislative and technical conditions for converting wheel and tyre combinations	3
2.1 Legislative conditions for converting wheel and tyre combinations	3
2.2 Technical conditions for converting wheel and tyre combinations	3
2.3 Additional wheel housing extensions (flaps)	4
2.4 „Series 80“ tyres	4
2.5 Vehicles with Plus running gear	4
3 Documents and codes/designations	6
3.1 New vehicle registration documents since 01.10.2005	6
3.2 COC document (EEC Certificate of Conformity)	7
3.3 Official type designations	7
4 Useful information regarding tyres	9
4.1 Identification markings on the tyre sidewall	9
4.2 Explanation of tyre markings	10
4.3 Speed ratings for tyres	11
4.4 Undulations	12
4.5 Tyre storage	13
4.6 Tyre ageing	13
4.7 Winter tyres	14
4.8 Winter tyres with speed symbol „V“	15
4.9 Extra Load (XL) V winter tyres	16
4.10 Maximum speeds for V and Extra Load (XL) winter tyres	16
4.11 Reinforced and Extra Load (XL) tyres	17
4.12 Snow chains	17
5 Tyre wear/ mileage for passenger car tyres	19
5.1 General	19
5.2 Requirements to be met by tyres	19
5.3 Wear behaviour of high-speed tyres	19
5.4 Factors influencing the service life of a tyre	20
5.5 Driving style	20
5.6 Tyre maintenance	21
5.7 Evenly worn tyres	22
5.8 Measuring tread depth	23
5.9 One-sided wear	23
5.10 Outer shoulder wear	26
5.11 Wear in middle of tyre	26
5.12 Diagonal washout	28
6 Tyre noise	29
6.1 General notes on tyre noise	29
6.2 Saw-tooth wear	29
6.3 Flat spots (from locking wheels)	30
7 Vibration caused by wheels and tyres	32
7.1 Causes of vibration	32
7.2 Balancing wheels	32
7.3 Conducting a road test before balancing wheels	32
7.4 Balancing wheels on stationary wheel balancing machine	33
7.5 Vibration control system VAS 6230	35
7.6 Finish balancer	35
7.7 Radial and lateral runout of wheels and tyres	36
7.8 Checking radial and lateral runout on wheels and tyres with tyre gauge V.A.G 1435	36
7.9 Checking radial and lateral runout on wheel rim	37



7.10	Match mounting	38
7.11	Flat spots caused by storage or handling	39
8	Vehicle pulls to one side	41
8.1	General	41
8.2	Conicity	41
8.3	Remedies when vehicle pulls to one side	42
8.4	Strategic rotation of wheels having non-directional tyres	43
8.5	Strategic rotation of wheels having unidirectional tyres	44
9	Tyre damage	46
9.1	General information	46
9.2	Construction of a radial belted tyre	47
9.3	Impact damage	47
9.4	Cuts	49
9.5	Damage caused by foreign bodies	49
9.6	Loss of air from tyre	49
9.7	Tyre pressure	49
9.8	Tyre damage due to insufficient tyre pressure	50
9.9	Rising tyre temperature caused by insufficient inflation pressure	51
9.10	Tyre damage due to fitting error (fitting damage)	52
10	Tyres with run-flat properties	54
10.1	General	54
10.2	Design and identification	55
10.3	Retrofitting/requirements when using run-flat tyres	55
10.4	Repairs	56
11	Facts about disc-type wheels (passenger cars)	57
11.1	Design of disc-type wheel	57
11.2	Data on wheel rims	57
11.3	Wheel rims - pitch circle diameter	58
11.4	Split rim composite wheels	58
11.5	Alloy wheels with exchangeable trim elements	58
11.6	Alloy wheels with exchangeable trim elements (Zaragoza)	59
11.7	Care and maintenance of alloy wheel rims	63
11.8	Restoring alloy wheels	63
11.9	The valve	65
12	Fitting and removing wheels	66
12.1	Changing wheels	66
12.2	Instructions for changing or fitting wheels	66
12.3	Revised wheel bolts for Sharan from model year 2001	68
12.4	Notes on use of temporary spare wheels	68
13	Lupo 3L, Lupo FSI, Lupo GTI from model year 1999	70
13.1	Lupo 3L, type 6E model year 1999 to model year 2006	70
13.2	Wheel allocation Lupo 3L, type 6E model year 1999 to model year 2006	71
13.3	Lupo FSI, type 6E model year 2001 to model year 2006	72
13.4	Wheel allocation Lupo FSI, type 6E model year 2001 to model year 2006	73
13.5	Lupo GTI, type 6ES model year 2001 to model year 2006	75
13.6	Wheel allocation Lupo GTI, type 6ES model year 2001 to model year 2006	76
14	Lupo model year 1999 to model year 2005	78
14.1	Lupo, type 6X model year 1999 to model year 2005	78
14.2	Wheel allocation Lupo, type 6X model year 1999 to model year 2005	80
15	Polo model year 1995 to model year 2001	86
15.1	Polo, type 6N up to and including 07.95	86
15.2	Wheel allocation Polo, type 6N up to and including 07.95	87
15.3	Polo, type 6N from 08.95 up to and including model year 1996	89
15.4	Polo, type 6N from model year 1997 to model year 1999	90



15.5	Wheel allocation Polo, type 6N from 08.95 to model year 1999	91
15.6	Polo, type 6N from model year 2000 to model year 2001	96
15.7	Wheel allocation Polo, type 6N from model year 2000 to model year 2001	97
16	Polo Classic model year 1996 to model year 2002	103
16.1	Polo Classic, type 6KV model year 1996 to model year 2002	103
16.2	Wheel allocation Polo Classic, type 6KV model year 1996 to model year 2002	105
17	Polo estate model year 1998 to model year 2002	109
17.1	Polo estate type 6KV model year 1998 to model year 2002	109
17.2	Wheel allocation Polo estate type 6KV model year 1998 to model year 2002	111
18	Polo from model year 2002	115
18.1	Polo, type 9N model year 2002 to model year 2008	115
18.2	Polo, type 9N model year 2009	118
18.3	Wheel allocation for Polo, type 9N model year 2002 to model year 2009	122
19	Polo Fun model year 2004 to model year 2005	130
19.1	Polo Fun, type 9N model year 2004 to model year 2005	130
19.2	Wheel allocation for Polo Fun, type 9N model year 2004 to model year 2005	131
20	CrossPolo from model year 2006	133
20.1	CrossPolo, type 9N model year 2006 to model year 2009	133
20.2	Wheel allocation for CrossPolo, type 9N model year 2006 to model year 2009	134
21	Polo BlueMotion from model year 2007	136
21.1	Polo BlueMotion, type 9N model year 2007 to model year 2009	136
21.2	Wheel allocation for Polo BlueMotion, type 9N model year 2007 to model year 2009	137
22	Polo GTI from model year 2006	139
22.1	Polo GTI, type 9N model year 2006 to model year 2009	139
22.2	Wheel allocation for Polo GTI, type 9N model year 2006 to model year 2009	140
23	Polo GTI Cup Edition from model year 2007	145
23.1	Polo GTI Cup Edition, type 9N model year 2007 to model year 2009	145
23.2	Wheel allocation for Polo GTI Cup Edition, type 9N model year 2007 to model year 2009	146
24	Polo saloon/sedan model year 2004 to model year 2005	150
24.1	Polo saloon/sedan, type 9N model year 2004 to model year 2005	150
24.2	Wheel allocation Polo saloon/sedan, type 9N model year 2004 to model year 2005	152
25	Golf model year 1992 to model year 1998	157
25.1	Golf type 1HX0, Golf Syncro 1HX1, Golf type 1H	157
25.2	Wheel allocation for Golf type 1HX0, Golf Syncro 1HX1, Golf type 1H	161
26	Golf model year 1998 to model year 2004, Golf R32, Golf Anniversary GTI	171
26.1	Golf, Golf 4Motion, type 1J model year 1998 to model year 2004	171
26.2	Wheel allocation Golf, Golf 4Motion, type 1J model year 1998 to model year 2004	174
26.3	Conditions for fitting 17" wheels and tyres to Golf model year 1998 to model year 2004	186
26.4	Golf R32, type 1J model year 2003 to model year 2005	187
26.5	Wheel allocation Golf R32, type 1J model year 2003 to model year 2005	188
26.6	Golf Anniversary GTI, type 1J model year 2002	189
26.7	Wheel allocation for Golf Anniversary GTI, type 1J model year 2002	190
26.8	Conditions for fitting 17" and 18" wheels and tyres of Golf Anniversary GTI	194
27	Golf model year 2004 to model year 2009	196
27.1	Golf, Golf 4Motion, type 1K model year 2004 to model year 2006	196
27.2	Golf, Golf 4Motion, type 1K model year 2007 to model year 2009	199
27.3	Wheel allocation for Golf, Golf 4Motion, type 1K from model year 2004 to model year 2009	203
28	Golf BlueMotion model year 2008 to model year 2009	216
28.1	Golf BlueMotion, type 1K model year 2008 to model year 2009	216
28.2	Wheel allocation for Golf BlueMotion, type 1K model year 2008 to model year 2009	217
29	Golf GTI model year 2005 to model year 2009	224
29.1	Golf GTI, type 1K model year 2005 to model year 2008	224



29.2	Golf GTI, type 1K model year 2009	225
29.3	Wheel allocation for Golf GTI, type 1K model year 2005 to model year 2009	227
30	Pirelli Golf model year 2008 to model year 2009	238
30.1	Pirelli Golf, type 1K model year 2008 to model year 2009	238
30.2	Wheel allocation for Pirelli Golf, type 1K model year 2008 to model year 2009	239
31	Golf R32 model year 2006 to model year 2009	251
31.1	Golf R32, type 1K model year 2006 to model year 2009	251
31.2	Wheel allocation for Golf R32, type 1K model year 2006 to model year 2009	252
32	CrossGolf from model year 2007	258
32.1	CrossGolf, type 1KP model year 2007 to model year 2009	258
32.2	Wheel allocation for CrossGolf, type 1KP model year 2007 to model year 2009	261
33	Golf Plus from model year 2005	272
33.1	Golf Plus, type 1KP model year 2005 to model year 2006	272
33.2	Golf Plus, type 1KP model year 2007 to model year 2009	274
33.3	Wheel allocation for Golf Plus, type 1KP model year 2005 to model year 2009	277
34	Golf Plus BlueMotion from model year 2008	290
34.1	Golf Plus BlueMotion, type 1KP model year 2008 to model year 2009	290
34.2	Wheel allocation for Golf Plus BlueMotion, type 1KP model year 2008 to model year 2009	291
35	Golf estate model year 1994 to model year 1998	298
35.1	Golf Estate type 1HX0, Golf Estate Syncro type 1HX1, Golf Estate type 1H	298
35.2	Wheel allocation for Golf Estate type 1HX0, Golf Estate Syncro type 1HX1, Golf Estate type 1H	301
36	Golf estate model year 1999 to model year 2006, Bora estate model year 1999 to model year 2005	309
36.1	Golf Estate, Golf Estate 4Motion, Bora Estate, Bora Estate 4Motion, type 1J	309
36.2	Wheel allocation for Golf Estate, Golf Estate 4Motion, Bora Estate, Bora Estate 4Motion, type 1J	312
36.3	Conditions for fitting 17" wheels and tyres	323
37	Golf Variant model year 2007 to model year 2010	325
37.1	Golf Variant, Golf Variant 4Motion; type 1KM model year 2007 to model year 2008	325
37.2	Golf Variant, Golf Variant 4Motion; type 1KM model year 2009 to model year 2010	328
37.3	Wheel allocation for Golf Variant, Golf Variant 4Motion; type 1KM model year 2007 to model year 2010	331
38	Golf Variant BlueMotion model year 2008 to model year 2010	343
38.1	Golf Variant BlueMotion, type 1KM model year 2008 to model year 2010	343
38.2	Wheel allocation for Golf Variant BlueMotion, type 1KM model year 2008 to model year 2010	344
39	Golf cabriolet model year 1994 to model year 1997	351
39.1	Golf cabriolet type 1EX0 model year 1994 to model year 1997	351
39.2	Wheel allocation Golf cabriolet, type 1EX0 from model year 1994 to model year 1997	352
40	Golf cabriolet model year 1998 to model year 2002	356
40.1	Golf cabriolet; type 1E from model year 1998 to model year 2002	356
40.2	Wheel allocation Golf cabriolet; type 1E from model year 1998 to model year 2002	357
41	Vento from model year 1992 to model year 1998	362
41.1	Vento; type 1HX0, 1H	362
41.2	Wheel allocation for Vento; type 1HX0, 1H	364
42	Bora model year 1999 to model year 2005	374
42.1	Bora, Bora 4Motion, type 1J model year 1999 to model year 2005	374
42.2	Wheel allocation Bora, Bora 4Motion, type 1J model year 1999 to model year 2005	377
42.3	Conditions for fitting 17" wheels and tyres	388
43	New Beetle RSi	389
43.1	New Beetle RSi, type 9CR from model year 2001	389
43.2	Wheel allocation for New Beetle RSi, type 9CR from model year 2001	390



44	Passat model year 1994 to model year 1997	392
44.1	Passat, type 35l model year 1994 to model year 1997	392
44.2	Wheel allocation Passat, type 35l model year 1994 to model year 1997	394
45	Passat model year 1997 to model year 2005	400
45.1	Passat, Passat estate, type 3B model year 1997 to model year 2000	400
45.2	Passat, Passat estate, type 3B model year 1997 to model year 2000	402
45.3	Passat, Passat estate, type 3BG model year 2001 to model year 2005	405
45.4	Wheel allocation Passat, Passat estate, type 3BG model year 2001 to model year 2005	406
45.5	Passat W8 4Motion, type 3BS model year 2002 to model year 2005	412
45.6	Wheel allocation Passat W8 4Motion, type 3BS model year 2002 to model year 2005	413
45.7	Passat Protect, type 3BL model year 2002 to model year 2005	414
45.8	Wheel allocation Passat Protect, type 3BL model year 2002 to model year 2005	415
46	Sharan from model year 1996	417
46.1	Sharan, Sharan Syncro, type 7M model year 1996 to model year 2000	417
46.2	Wheel allocation for Sharan, Sharan Syncro. Type 7M model year 1996 to model year 2000	420
46.3	Sharan, Sharan 4Motion, type 7M model year 2001	422
46.4	Wheel allocation for Sharan, Sharan 4Motion, type 7M model year 2001	424
46.5	Sharan, Sharan 4Motion, type 7M model year 2002 to model year 2010	428
46.6	Wheel allocation for Sharan, Sharan 4Motion, type 7M model year 2002 to model year 2010	429
47	Sharan BlueMotion from model year 2009	434
47.1	Sharan BlueMotion, type 7M model year 2009 to model year 2010	434
47.2	Wheel allocation for Sharan BlueMotion, type 7M model year 2009 to model year 2010	435
48	Touareg from model year 2003	437
48.1	Touareg, type 7L model year 2003 to model year 2010	437
48.2	Wheel allocation for Touareg, type 7L model year 2003 to model year 2010	441
49	Touareg R50 from model year 2008	449
49.1	Touareg R50, type 7L model year 2008 to model year 2010	449
49.2	Wheel allocation for Touareg R50, type 7L model year 2008 to model year 2010	450
50	Breakdown set for VW Vehicles	455
51	Temporary spare tyres and wheels for VW vehicles	456
52	Recommended summer tyres	458
52.1	Summer tyres Lupo 3L model year 1999 to model year 2005	458
52.2	Summer tyres Lupo FSJ model year 1999 to model year 2005	458
52.3	Summer tyres Lupo GTI model year 1999 to model year 2005	458
52.4	Summer tyres Lupo model year 1999 to model year 2005	458
52.5	Summer tyres Polo model year 1995 to model year 2001	459
52.6	Summer tyres Polo saloon/sedan model year 2004 to model year 2005	459
52.7	Summer tyres Polo Classic model year 1996 to model year 2002	460
52.8	Summer tyres Polo estate model year 1998 to model year 2002	461
52.9	Summer tyres for Polo from model year 2002	461
52.10	Summer tyres for Polo Fun model year 2004 to model year 2005	462
52.11	Summer tyres for CrossPolo from model year 2006	462
52.12	Summer tyres for Polo BlueMotion from model year 2007	462
52.13	Summer tyres for Polo GTI from model year 2007	463
52.14	Summer tyres for Polo GTI Cup Edition from model year 2007	463
52.15	Summer tyres Golf, Vento model year 1992 to model year 1998	463
52.16	Summer tyres Golf estate model year 1994 to model year 1998	464
52.17	Summer tyres Golf cabriolet model year 1994 to model year 1997	465
52.18	Summer tyres Golf, Golf 4Motion model year 1998 to model year 2004	465
52.19	Summer tyres for Golf model year 2004 to model year 2009	466
52.20	Summer tyres for Golf BlueMotion model year 2008 to model year 2009	467
52.21	Summer tyres for Golf GTI model year 2005 to model year 2009	468



52.22	Summer tyres for Pirelli Golf model year 2008 to model year 2009	468
52.23	Summer tyres for Golf R32 model year 2006 to model year 2009	468
52.24	Summer tyres for CrossGolf from model year 2007	469
52.25	Summer tyres for Golf Plus from model year 2005	470
52.26	Summer tyres for Golf Plus BlueMotion from model year 2008	471
52.27	Summer tyres Bora, Bora 4Motion model year 1999 to model year 2005	471
52.28	Summer tyres Golf estate, Golf estate 4Motion model year 1999 to model year 2006, Bora estate, Bora estate 4Motion model year 1999 to model year 2005	472
52.29	Summer tyres for Golf R32	473
52.30	Summer tyres for Golf Anniversary GTI	473
52.31	Summer tyres Golf Variant model year 2007 to model year 2010	474
52.32	Summer tyres for Golf Variant BlueMotion from model year 2008	475
52.33	Summer tyres Golf cabriolet model year 1998 to model year 2002	475
52.34	Summer tyres for New Beetle RSi	476
52.35	Summer tyres Passat model year 1994 to model year 1997	476
52.36	Summer tyres Passat model year 1997 to model year 2005	477
52.37	Summer tyres for Passat W8	478
52.38	Summer tyres for Passat Protect	478
52.39	Summer tyres for Sharan from model year 1996	478
52.40	Summer tyres for Sharan BlueMotion from model year 2009	479
52.41	Summer tyres for Touareg model year 2008 to model year 2010	479
52.42	Summer tyres for Touareg R50 model year 2008 to model year 2010	479
53	Recommended all-season tyres	481
53.1	All-season tyres Lupo model year 1999 to model year 2005	481
53.2	All-season tyres Polo model year 1995 to model year 2001	481
53.3	All-season tyres for Polo from model year 2002	481
53.4	All-season tyres Polo saloon/sedan model year 2004 to model year 2005	482
53.5	All-season tyres Golf, Vento model year 1992 to model year 1998	482
53.6	All-season tyres Golf estate model year 1994 to model year 1998	482
53.7	All-season tyres Golf cabriolet model year 1994 to model year 1997	482
53.8	All-season tyres Golf, Golf 4Motion model year 1998 to model year 2004	482
53.9	All-season tyres for Golf model year 2004 to model year 2009	483
53.10	All-season tyres for CrossGolf from model year 2007	483
53.11	All-season tyres for Golf Plus from model year 2005	484
53.12	All-season tyres Bora, Bora 4Motion model year 1999 to model year 2005	484
53.13	All-season tyres Golf estate, Golf estate 4Motion model year 1999 to model year 2006, Bora estate, Bora estate 4Motion model year 1999 to model year 2005	485
53.14	All-season tyres Golf Variant model year 2007 to model year 2010	485
53.15	All-season tyres Golf cabriolet model year 1998 to model year 2002	485
53.16	All-season tyres Passat model year 1997 to model year 2005	486
53.17	All-season tyres for Passat W8	486
53.18	All-season tyres for Touareg model year 2003 to model year 2010	486
54	Recommended winter tyres	488
54.1	Winter tyres Lupo 3L model year 1999 to model year 2005	488
54.2	Winter tyres Lupo FSI model year 1999 to model year 2005	488
54.3	Winter tyres Lupo GTI model year 1999 to model year 2005	488
54.4	Winter tyres Lupo model year 1999 to model year 2005	489
54.5	Winter tyres Polo model year 1995 to model year 2001	489
54.6	Winter tyres for Polo from model year 2002	489
54.7	Winter tyres for Polo Fun model year 2004 to model year 2006	490
54.8	Winter tyres for CrossPolo from model year 2006	490
54.9	Winter tyres for Polo BlueMotion from model year 2007	490
54.10	Winter tyres for Polo GTI from model year 2007	490
54.11	Winter tyres for Polo GTI Cup Edition from model year 2007	491
54.12	Winter tyres Polo saloon/sedan model year 2004 to model year 2005	491
54.13	Winter tyres Polo Classic model year 1996 to model year 2002	491



54.14	Winter tyres Polo estate model year 1998 to model year 2002	492
54.15	Winter tyres Golf, Vento model year 1992 to model year 1998	492
54.16	Winter tyres Golf estate model year 1994 to model year 1998	492
54.17	Winter tyres Golf cabriolet model year 1994 to model year 1997	493
54.18	Winter tyres Golf, Golf 4Motion model year 1998 to model year 2004	493
54.19	Winter tyres for Golf model year 2004 to model year 2009	494
54.20	Winter tyres for Golf BlueMotion model year 2004 to model year 2009	494
54.21	Winter tyres for Golf GTI model year 2005 to model year 2009	495
54.22	Winter tyres for Pirelli Golf model year 2008 to model year 2009	495
54.23	Winter tyres for Golf R32 model year 2006 to model year 2009	495
54.24	Winter tyres for CrossGolf from model year 2007	496
54.25	Winter tyres for Golf Plus from model year 2005	496
54.26	Winter tyres for Golf Plus BlueMotion from model year 2008	497
54.27	Winter tyres Bora, Bora 4Motion model year 1999 to model year 2005	497
54.28	Winter tyres Golf estate, Golf estate 4Motion model year 1999 to model year 2006, Bora estate, Bora estate 4Motion model year 1999 to model year 2005	498
54.29	Winter tyres for Golf 32	498
54.30	Winter tyres for Golf Anniversary GTI	498
54.31	Winter tyres Golf Variant model year 2007 to model year 2010	499
54.32	Winter tyres for Golf Variant BlueMotion model year 2008 to model year 2010	499
54.33	Winter tyres Golf cabriolet model year 1998 to model year 2002	500
54.34	Winter tyres for New Beetle RSi	500
54.35	Winter tyres Passat model year 1994 to model year 1997	500
54.36	Winter tyres Passat model year 1997 to model year 2005	501
54.37	Winter tyres for Passat W8	501
54.38	Winter tyres for Passat Protect	501
54.39	Winter tyres for Sharan from model year 1996	502
54.40	Winter tyres for Sharan BlueMotion from model year 2009	502
54.41	Winter tyres for Touareg model year 2003 to model year 2010	502
54.42	Winter tyres for Touareg R50 model year 2008 to model year 2010	502





44 – Wheels, tyres, vehicle geometry

1 General notes on wheels and tyres (passenger cars)

This information is intended to help you form an opinion as unequivocally and accurately as possible in the event of tyre damage and related complaints.

In this chapter, you will learn a great deal about tyres and also about wheels and rims.

Tyres are hi-tech products that are optimally adapted to the operating conditions of modern vehicles.

As with all highly developed technical products, tyres require proper care, maintenance and service. This is essential to ensure safety, performance and comfort for the entire service life of the tyre.

Tyres are constantly being further developed. Quality tyres are the result of modern design methods and production processes, as well as continuous quality checks. All tyres that are recommended by VW have been tested by the technical development department and have been designed specifically for each model in collaboration with the tyre manufacturers.

We therefore recommend fitting only the recommended tyre makes when renewing tyres.

Vehicle safety has the top priority. With regard to the various operating conditions such as

- differing speed ranges,
- winter and summer use and
- wet and dry roads,

the optimal compromise for vehicle safety must be found.

Every tyre is subjected to a wide range of different driving conditions over its entire service life. It is therefore important that the basic requirements for ensuring optimal tyre performance are met.

Proper adjustment of the axle geometry during wheel alignment is an important prerequisite for ensuring the optimum service life of the tyre. Therefore, wheel alignment must always be within the specified tolerance range.

Information for wheel alignment ⇒ Running gear, axles, steering;
Rep. gr. 44 .



Note

Tyre damage and related problems can have various causes. It is therefore very important to ascertain whether the problem has been caused by the tyre or other components.

Normal wear and tear on a tyre will alter its characteristics. Tyre noise and vibration could then be the result. These are indications of wear and do not constitute damage in the sense of a tyre defect. Measures can be taken to at least partly eliminate the symptoms. However, in some cases it may not be possible to eliminate tyre noise completely.



Special models

Special models are only partly represented in the tables in Appendix 2 for parts certificate. Modification of these vehicles depends on the engine capacity of the basic model.





2 Legislative and technical conditions for converting wheel and tyre combinations

2.1 Legislative conditions for converting wheel and tyre combinations

The manufacturer is issued with a general operating permit (GTA in accordance with § 20 StVZO (German road traffic and licensing regulations) and EU operating permit) for the overall vehicle with all parts for specific conversions.

Conversions of wheels and tyres can only be carried out under certain conditions. When doing this, the following points must be observed:

- ◆ If the size of wheel and tyre, with an indication of the load index and the speed symbol, is included in the vehicle GTA and EU operating permit/type approval ⇒ [page 7](#) , this wheel and tyre combination can be fitted on the vehicle without any problem.

It is not necessary for the wheel and tyre combination specified in the registration certificate part I (certificate of registration) to be fitted. All combinations approved in the vehicle GTA or EU operating permit/type approval ⇒ [page 7](#) may be fitted to the vehicle.

- ◆ For the conversions recommended by VOLKSWAGEN AG (see attachment for parts certificate) there are no general operating permits in accordance with § 22 StVZO (German road traffic and licensing regulations).
- ◆ Unless the wheels and/or tyres are included in the relevant vehicle GTA or EU operating permit/type approval, the vehicle will no longer meet the requirements of the road traffic regulations if converted.

These versions are based on the conditions valid in the European Union and no guarantee can be provided for their completeness. In some cases there are different legislative requirements outside the European Union.

The table included in the attached parts certificate shows the VOLKSWAGEN AG recommended and TÜV NORD Mobilität GmbH & Co. KG tested wheel and tyre combinations on VW vehicles and also the conditions to be observed for fitting. The use of genuine disc-type wheels on a vehicle to which they have not been allocated is not permissible.

The list of possible conversions deals with combinations that meet the requirements of VOLKSWAGEN AG with regards to road handling and road safety. They are the result of practical trials and are therefore recommended by VOLKSWAGEN AG.

Refer also to the new vehicle registration documents that were issued from 01.10.2005 ⇒ [page 6](#) .

2.2 Technical conditions for converting wheel and tyre combinations

- The wheel and tyre combinations and conversions listed in the tables of the individual vehicles refer exclusively to Volkswagen genuine disc-type wheels.




- Approval of wheel and tyre combinations or a change to wheels from the accessories trade is not possible with the parts certificate attached here.
- Tubeless radial tyres may only be fitted to rims with a safety hump feature on the shoulder.
- Tyres with run-flat properties (reinforced side walls) may only be used on disc-type wheels with an extended hump and on vehicles with a tyre pressure monitoring system
⇒ [page 55](#) .
- If the wheel and tyre combinations listed are used, the associated tyre inflation pressures must be adhered to. The tyre inflation pressures for summer tyres can be found on the sticker on the inside of the tank flap or in the tables of the individual vehicles.
- Sufficient clearance to the wheels and tyres at parts of the wheel housing, suspension and braking system is assured if the notes and specifications established in the parts certificate are observed in all operating conditions.
- Unless otherwise stated, snow chains may only be fitted to the drive wheels. On all-wheel drive vehicles, however, only the front wheels may be fitted with snow chains with the exception of the Touareg (rear wheels may also be fitted with snow chains).

2.3 Additional wheel housing extensions (flaps)

For technical reasons some vehicles require wheel housing extensions (flaps) on the wing or bumper -arrows- when using certain wheel and tyre combinations.

Please check if there is a requirement to remove the flaps.

The information is located in the overview table for the respective vehicle.

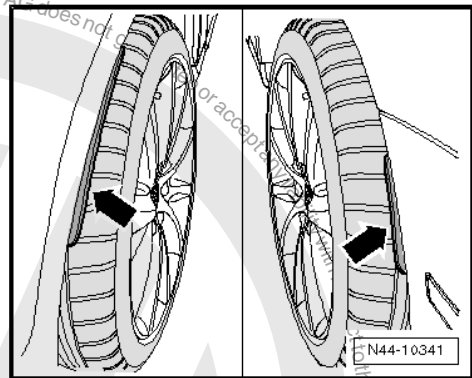

2.4 „Series 80“ tyres

Tyres of the „80“ series (e.g. 145/80 R 13 74 S) will replace the „82“ series (e.g. 145/82 R 13 74 S). Lawmakers have stipulated that „82“ series tyres may be replaced by „80“ series tyres without having been entered in the vehicle documents.

The condition for this is that the „80“ series tyres have the same width, be of the same type – cross-ply or radial belted – and have the same or higher load index.

If only „80“ series tyres are entered in the vehicle documents, „82“ series tyres may only be used if an entry has been made in the vehicle documents.

2.5 Vehicles with Plus running gear

The Plus running gear differs from the basic running gear in the following components:

- ◆ Suspension link
- ◆ Swivel joint
- ◆ Wheel bearing housing




- ◆ Anti-roll bar with coupling rod (not on Passat)
- ◆ Drive shaft
- ◆ Wheel hub
- ◆ Brake disc
- ◆ Brake caliper
- ◆ Wheel

One of the identifying features of the Plus running gear is the connection between the swivel joint and the wheel bearing housing.

A - Connection between swivel joint and wheel bearing housing on basic running gear

B - Connection between swivel joint and wheel bearing housing on Plus running gear

The 5 wheel bolts on each wheel are the most visible identifying feature. The Passat VR6 to 09.93 is an exception. From 06.91, this vehicle was produced with 5 wheel bolts, but was gradually equipped with the Plus running gear from 02.92.

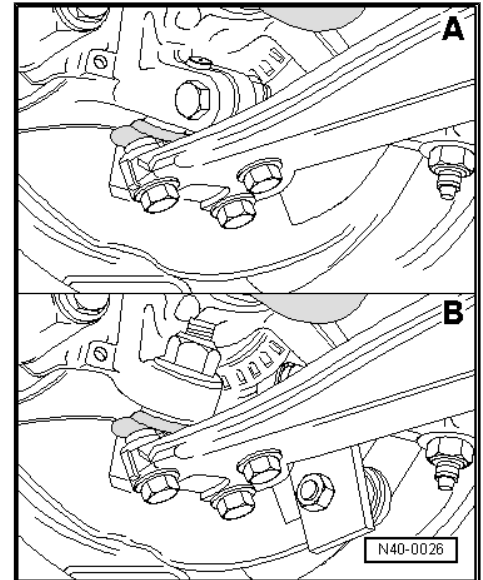

Overview - vehicles with Plus running gear

Model	Model year	Engine
Golf GTI	from 1992	85 kW
Golf GTI 16V	from 1993	110 kW
Golf VR6	from 1992	128 kW
Golf VR6 Syncro	from 1994	140 kW
Vento GT	from 1992	85 kW
Vento VR6	from 1992	128 kW
Passat 16V	from 1994	110 kW
Passat VR6	from 1994	128 kW
Passat VR6 Syncro	from 1994	135 kW



3 Documents and codes/designations

3.1 New vehicle registration documents since 01.10.2005

The implementation of EU Directive 1999/37/EU "Registration Documents for Vehicles" in national law and legal data protection requirements have necessitated the introduction of new, falsification-proof registration documents.

Since 01.10.2005, only the new documents are issued by the registration authorities in the event of new registrations, change of ownership, registration of technical modifications and all other matters.

The new registration documents are comprised of:

- ◆ Registration certificate part I, which replaces the certificate of registration and
- ◆ Registration certificate part II, which replaces the vehicle log book.

Registration certificate part I (certificate of registration)

- ◆ Contains all vehicle technical data which must be available to register a vehicle in Europe; however, only one wheel/tyre combination approved as standard is specified
- ◆ Contains the EU-wide, standardised, alphanumeric codes assigned to the technical data, so that the German registration certificate can be converted without problems into the registration document prescribed in non-member European countries for registration there
- ◆ Contains a field for documenting temporary or final immobilisation of the vehicle, and is therefore no longer withdrawn in the event of temporary or final immobilisation

Registration certificate part II (vehicle log book)

- ◆ Contains the note that the holder of the registration certificate is not identified as the owner
- ◆ Contains only the current and, if applicable, the last vehicle owner; the actual number of previous owners is shown numerically
- ◆ Contains only a small percentage of the technical vehicle data
- ◆ No longer serves to document temporary vehicle deregistration. The vehicle and body type specified under number 1 in the old vehicle documents will not exist in the future. In the new documents, this will be replaced by standardised EU vehicle classes with body type

Introduction of the new registration documents will lead to barely any changes for the vehicle operator.

Like the old certificate of registration, the registration certificate part I (certificate of registration) must be kept in the vehicle and submitted to responsible persons on request.

It is not necessary for the wheel and tyre combination specified in the registration certificate part I (certificate of registration) to be fitted. All combinations approved according to the general vehicle type approval or EU type approval ⇒ [page 7](#) may be fitted.

The validity of a wheel/tyre combination which deviates from the general vehicle type approval or EU type approval must still be verified via an entry in the registration certificate part I (certificate



of registration), an installation certificate based on a part certificate or general type approval for the wheel/tyre combination.

3.2 COC document (EEC Certificate of Conformity)

Manufacturers of motorized vehicles must apply for an EU operating permit for all class M1 passenger carrying vehicles.

A certificate is produced on the basis of this operating permit - the COC (Certificate of Conformity).

This document certifies that the vehicle complies with the EU operating permit (EU type approval) and can be registered in every EU country without an individual type approval.

The document will be issued for all vehicles that comply with the EU operating permit.

These vehicles have an EU type plate (black sticker) in the area of the driver's door, or in the case of older vehicles, in the engine compartment.

The COC document has the same value as the registration document and therefore the original should not be carried on the vehicle.

The COC document contains the EU general type approval number and detailed technical information on the vehicle such as emissions classification and all the permitted wheel and tyre combinations.

3.3 Official type designations

Passenger cars licensed for road use in Germany need a general type approval for the issue of a vehicle title document.

The type approval is issued by the Federal Ministry for Transport in Flensburg following type inspection. This procedure was permitted until 31.12.1997 and, in exceptional cases, even after that.

Other member states of the European Union (EU) have different procedures for issuing a document similar to the German title document. Until 31.12.1997, each member state was entitled to issue its own national type approvals according to its own procedures.

Since 1.1.1998, all passenger cars licensed within the European Union must have a type approval corresponding to EU guidelines => [page 7](#) . Vehicles licensed for road use with single-vehicle approval according to § 21 StVZO in Germany are excepted.

This means the same guidelines apply to all vehicle manufacturers. This makes it easier to trade across national borders within the EU.

Official type approval, sales or trade designation

In the following table, all VW vehicles which already have EU type approval are listed in the column "EU type".

All VW vehicles which were granted type approval according to the procedure valid up to 31.12.97 are listed in the column "General type"

If entries appear in both columns "General type" and "EU type", there are vehicles of this model which are approved by both StVZO and EU guidelines. In this case, the first step is to determine exactly what type of vehicle you have. There are two possibilities:

1. possibility

The last page of the vehicle title includes the field „Certified holder of a general type approval/EEC type approval“. Either the general



type approval number of the EU type approval number is entered here, assuming it is the original vehicle title document. This is the case only if the vehicle was not deregistered in the past for longer than 12 months.

2. possibility

Check whether the general type approval number or the EU type approval number is entered on the vehicle identification plate.

Official type designation for vehicles with		Sales or trade designation
General type	EU type	
-	6E	Lupo 3L, Lupo FSI
-	6ES	Lupo GTI
-	6X	Lupo 1999 >
6N	6N	Polo 1995 > (A03)
-	6KV	Polo Classic 1996 > (A13); Polo Estate 1998 > (A23)
-	9N	Polo 2002 >; Polo Fun 2004 >; Cross Polo 2006 > (A04)
1HX0	1H	Golf 1992 > (A3)
1HX0	1H	Golf Estate (A3)
1HX0	1H	Vento (A3)
1HX1	1H	Golf Syncro (A3)
1HX1	1H	Golf Syncro Estate (A3)
1EX0	1E	Golf Cabriolet (A3)
-	1J	Golf 1998 >, Golf 4Motion (A4)
-	1J	Golf Estate 1999 >
-	1J	Bora 1999 >, Bora 4Motion
-	1J	Bora Estate 1999 >
-	1K	Golf 2004 >
-	1KP	Golf Plus 2005 >; Cross Golf 2007 >
-	9CR	New Beetle RSi 2001 >
35I	-	Passat 1994 >
35I	-	Passat Estate 1994 >
-	3B	Passat/Passat Estate 1997 >
-	3B	Passat/Passat Estate 4Motion 1997 >
-	3BG	Passat/Passat Estate 2001 >
-	3BG	Passat/Passat Estate 4Motion 2001 >
-	3BS	Passat/Passat Estate W8 4Motion 2002 >
-	3BL	Passat Protect 2002 >
7M	7M	Sharan, Sharan Syncro 1996 >
7L	7L	Touareg 2003 >



4 Useful information regarding tyres

4.1 Identification markings on the tyre sidewall

Example: Continental ContiPremiumContact 2

1 - Size code

- e.g. 205/55 R 16
 ⇒ [page 10](#)

2 - Position of TWIs (Tread Wear Indicators)

3 - Manufacturer (trade name)

4 - Construction

- Radial - radial cord direction in carcass
- Tubeless - code for tubeless tyres

5 - Load capacity index / speed rating

- e.g. 91 ⇒ [page 11](#)
- e.g. H ⇒ [page 10](#)

6 - Specified direction of rotation/installation for tyre

7 - Maximum permissible load

- Data for North America

8 - Maximum permissible tyre pressure

- Data for North America

9 - Number of plies in the centre of the tread and in the sidewalls as well as information about the material

10 - E number = Approval number

- Tyre fulfils European guidelines

11 - Manufacturer code / date of manufacture

- Identification number for manufacturer's plant, tyre size and tyre model
- Tyre ageing / date of manufacture ⇒ [page 13](#)

12 - DOT - Department of Transportation

- Tyre fulfils standards of the Department of Transportation of the United States of America

13 - Marking for Brazil

14 - Marking for China


15 - Country of origin

- e.g. manufactured in Germany (Made in Germany)

16 - Safety reference for use or fitting of tyre

17 - Relative expected service life - abrasion resistance

- based on a US standard test

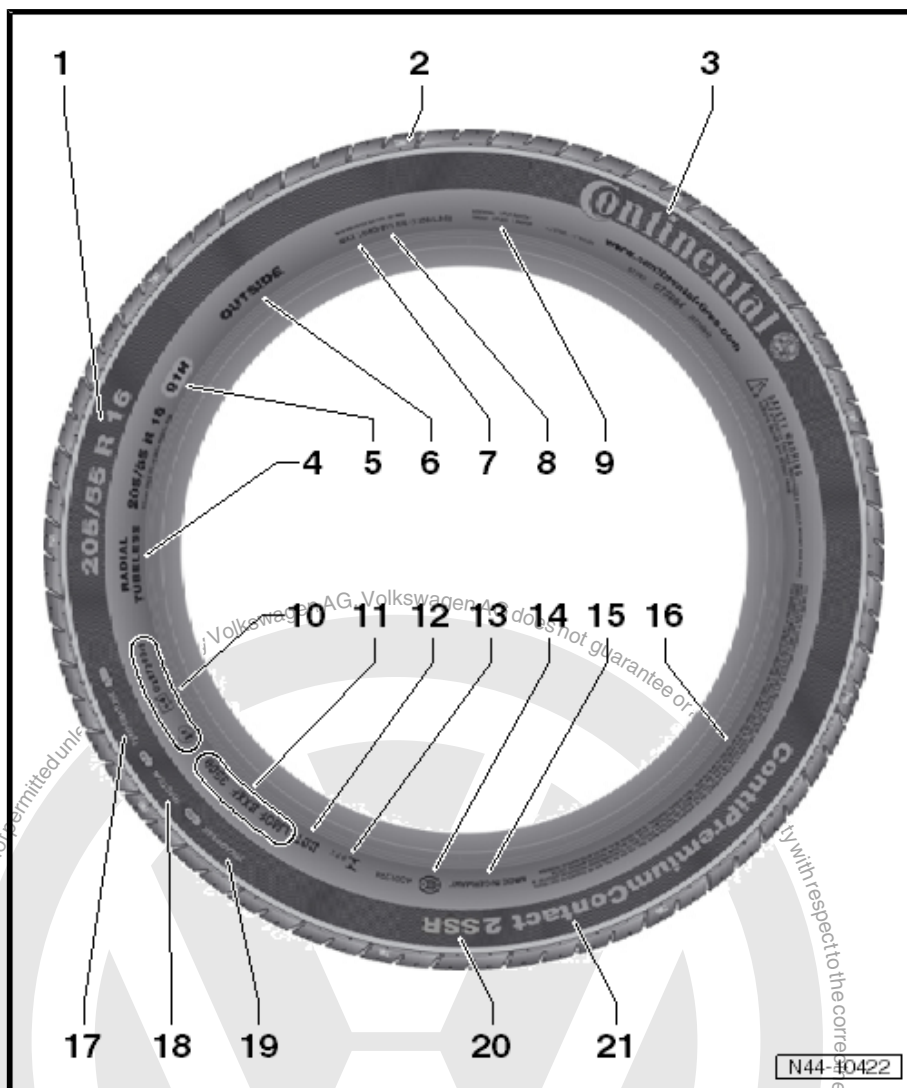



18 - Rating of wet-braking traction, A, B or C

- According to a US test

19 - Rating of temperature resistance, A, B or C

- According to a US test

20 - Identifying tyres with run-flat properties

- e.g. self-supporting run-flat
- Identifying tyres with run-flat properties => [page 55](#)

21 - Tread pattern

- e.g. ContiPremiumContact

4.2 Explanation of tyre markings

Explanation of tyre dimensions

Tyres	Speed	1	2	3	4	5	6	7
Summer tyres	to 240 km/h	195	65	R	15	91	V	-
Winter tyres	to 160 km/h	195	65	R	15	91	Q	M + S
Winter tyres	to 190 km/h	195	65	R	15	91	T	M + S
High-speed tyres	faster than 240 km/h	225	50	ZR	16	91	-	

- 1 - Tyre width
- 2 - Aspect ratio in %
- 3 - Code for tyre construction „R“ indicates radial
- 4 - Rim diameter designation
- 5 - Load rating code/load index (LI)
- 6 - Speed rating code
- 7 - Winter tyre/code for all-season tyre

Speed rating / maximum speed

Speed rating code	Maximum speed in km/h
L	120
M	130
N	140
P	150
Q	160
R	170
S	180
T	190
U	200
H	210
V	240
ZR	above 240
W	270
Y	300



Load rating code / load index (LI)

The load rating can be found on the sidewall of the tyre. It provides information about the maximum load that the tyre can bear.

The load rating is included in the size designation of the tyre (e.g. 195/65 R 15 91T). It is indicated on the tyre as a code according to ETRTO. The following table shows the load rating codes used at VW with the corresponding load capacity of the tyres.

Load rating code	Maximum load of tyre in kg
75	387
78	425
79	437
80	450
81	462
82	475
83	487
84	500
85	515
86	530
87	545
88	560
89	580
90	600
91	615
92	630
93	650
94	670
95	690
96	710
97	730
98	750
99	775
100	800
101	825
102	850
103	875
104	900
110	1060
112	1120

4.3 Speed ratings for tyres

The speed rating (e.g. "T") following the size of the tyre (e.g. 185/65 R14 14 „T“) indicates the maximum permitted speed (v_{max}) of the tyre.

The tyres for the vehicle must be selected so that their maximum permitted speed is greater than the maximum speed that the vehicle („based on model“) can attain.



Vehicles with national type approval

If the vehicle has a national type approval, the maximum speed for the vehicle is calculated as follows:

Formula for vehicles with v_{\max} up to 150 km/h

$$v_{\max} = 1.03 \times v + 3.5 \text{ km/h} \Rightarrow \text{page 12}$$

Example: Specified maximum speed $v = 145 \text{ km/h}$

$$v_{\max} = 1.03 \times 145 \text{ km/h} + 3.5 \text{ km/h} = 152.85 \text{ km/h}$$

In this example, a tyre with the speed rating „Q“ or higher must be used.

Formula for vehicles with v_{\max} above 151 km/h

$$v_{\max} = 1.01 \times v + 6.5 \text{ km/h} \Rightarrow \text{page 12}$$

Example: Specified maximum speed $v = 163 \text{ km/h}$

$$v_{\max} = 1.01 \times 163 \text{ km/h} + 6.5 \text{ km/h} = 171.13 \text{ km/h}$$

In this example, a tyre with the speed rating „S“ or higher must be used.

Vehicles with EC type approval

If your vehicle has an EC type approval, the maximum speed for all vehicles is calculated as follows:

$$v_{\max} = 1.05 \times v \Rightarrow \text{page 12}$$

Example: Specified maximum speed $v = 172 \text{ km/h}$

$$v_{\max} = 1.05 \times 172 \text{ km/h} = 180.60 \text{ km/h}$$

In this example, a tyre with the speed rating „T“ or higher must be used.

It is permitted to use tyres with a higher speed rating. The same applies to tyres with a higher load index.



Note

For the letter „v“, enter the maximum speed given in field „T“ of part I or II of the registration document or under number 6 of the vehicle documentation. This calculation is necessary because all vehicles, for technical reasons, achieve different maximum speeds within a legally permitted tolerance.

4.4 Undulations

Undulations are slight wavy irregularities in the tyre sidewall.

They run from the bead towards the shoulder of the tyre. These parts appear in the figure [⇒ page 41](#) .

The cause is the accumulation of material at the joints of the tyre components.

Undulations have no effect on:

- ◆ Safety,
- ◆ Service life,
- ◆ Handling or
- ◆ Other characteristics of the tyre.

Undulations are visible to varying extents. It is not necessary to inspect the tyre or remove it from the rim.



What causes undulations?

Modern steel belted tyres are constructed with single-ply side walls to save weight.

The sidewall components consist of long strips before they are joined together to form a tyre. They must overlap at the joints. Consequently, slight irregularities or waves are created in the area of the overlapping parts. The overlaps are easier to see from the outside due to the single-ply construction.

4.5 Tyre storage

Storage room

The conditions have to be:

- dark,
- dry,
- cool and
- ventilated

in the tyre storage room.



WARNING

Stored tyres must not come in contact with fuel, oil, grease or chemicals under any circumstances. Otherwise, the material in the tyre will be damaged by chemical reactions which are not always visible.

As a result, dangerous situations can occur when the car is driven.

Of course, tyre damage occurs only if the tyre is in contact with the chemical for a relatively long time. If a few drops of fuel land on a tyre during a fill up, this is of no concern.

Storage of tyres

Complete wheels

Tyres mounted on wheels can be stored flat, stacked one upon the other. In this case, it is important to ensure that the tyres are clean and dry. The inflation pressure should be increased to a maximum of 3 bar.

Tyres without wheels

Tyres without wheels are best stored standing vertically. If tyres lie stacked for longer periods of time, they will be pressed together with a substantial force. The tyres will then be more difficult to fit, as they do not sit on the bead seats. If tyres are stored standing vertically, it is recommended to turn them every 14 days to avoid flat spots.

4.6 Tyre ageing

Tyres age as a result of physical and chemical processes, which can impair the function of the tyres. Tyres which are stored for longer periods of time harden and become brittle faster than tyres which are constantly in use on a vehicle. Older tyres may develop hairline cracks as a result of ageing. When tyres are in regular use, the constant flexing activates softeners in the rubber, preventing hardening and the development of cracks.

It is therefore important to take into account not only the tread depth, but also the age of spare tyres, stored tyres and tyres which are not permanently in use. The tyre age can be determined from



in the DOT designation, which includes the production date of the tyre.

Example of a DOT number to 31.12.1999

DOT	5	0	9	<
				Stands for 199_
				Last digit is production year
				Week

In this example, the production date is the 50th week of 1999.

Example of a DOT number from 01.01.2000

DO	0	1	0	0
T				
				Last 2 digits is production year
				Week

In this example, the production date is the 1st week of 2000.

Recommendation

- ◆ It is recommended not to use summer and winter tyres which are older than 6 years anymore. The original properties deteriorate due to the aging process. Winter tyres especially lose their adhesion properties.
- ◆ When new tyres are fitted, the spare tyre may also be used if it is in flawless condition and is not more than 6 years old. The age of the tyre has a great influence on the high-speed capability of the tyre. It is possible to combine a spare tyre which is several years old with new tyres; however, this can have an adverse influence on car handling.
- ◆ Tyres are constantly being further developed, which can lead, for example, to slight changes in the rubber compound, even if the tyres are of the same make, size and tread pattern.
- ◆ All VW vehicles are factory-fitted with four identical tyres and wheels.

Front-wheel drive vehicles:

- ◆ For reasons of safety, tyres of the same make and with the same tread pattern should be mounted on one axle.

Four-wheel drive vehicles:

- ◆ Vehicles with four-wheel drive must always be equipped with four wheels with tyres of the same size, construction, tread pattern and make.

Renewing tyres

Tyres must always be renewed when:

- the legal minimum tread depth of 1.6 mm is reached,
- there is visible mechanical damage

4.7 Winter tyres

Use of winter tyres

As of 01.05.2006, a change to the German road traffic regulations (StVO) came into force which caused the following supplement to be made: "The equipment in motor vehicles has to be adapted to the weather conditions. In particular, this includes suitable tyres and antifreeze in the windscreen washing system."



Please point out to customers that, since May 1st 2006, they are legally obliged to adapt their vehicle's equipment, particularly the tyres, to winter weather conditions.

For driving in winter, we recommend that the vehicle be equipped with winter tyres in the sizes recommended in table 2 of the parts certificates.

As a basic rule:

All tyre sizes listed in the vehicle documents can also be used as winter tyres.

The handling characteristics may be affected by the use of winter tyres and the possible change in the dimensions of the wheel and tyre. Therefore, when using winter tyres, you must adapt your speed to the changed handling characteristics and to the road conditions.

To achieve the best possible handling, winter tyres must be fitted on all wheels.

If the vehicle is equipped with rims other than the factory-fitted rims, you must take the following into consideration when you fit winter tyres:

- ◆ Wheels and wheel bolts are matched.
- ◆ Whenever the wheels are changed, corresponding wheel bolts of the correct length and with the correctly shaped tapered seats are used ¹⁾. The secure fit of the wheels and the functioning of the brakes depends on this.
- ◆ The suitability of winter tyres with less than 4...5 mm tread depth for winter operation is limited.
- ◆ Some countries require winter tyres to have a tread depth of at least 4 mm.
- ◆ We recommend that winter tyres be replaced after no more than six years. The special „winter properties“ of these tyres decline with age, regardless of how much they are used.

Vehicles with tyre pressure control

On vehicles with tyre pressure control, the tyre inflation pressure has to be resaved or matched when changing over between summer and winter tyres → Workshop manual - Running gear - for relevant model .

1) A spherical cap is the curved surface of a section of a sphere cut by a plane. You can see a spherical cap on the wheel bolt and in the wheel (rim) in the tapped hole for the wheel bolt.

4.8 Winter tyres with speed symbol „V“

The tyre industry now supplies winter tyres with speed symbol "V". But only under certain conditions may these tyres be used up to the maximum permitted speed $v_{max} = 240$ km/h.

Vehicles with V tyres

Vehicles requiring V tyres according to the vehicle's title document can use winter tyres with speed symbol V without restriction at speeds up to $v_{max} = 240$ km/h.

Vehicles with W, Y or ZR tyres:

Under certain circumstances, vehicles requiring W, Y or ZR tyres according to the vehicle's title document may not be driven at speeds of $v_{max} = 240$ km/h.

Why?

V summer tyres and V winter tyres without special identification ⇒ [page 16](#) have 100 % of their maximum load capacity (as



specified by their load index „LI“) => [page 16](#) only up to speeds of 210 km/h.

Speeds above 210 km/h are possible with V winter tyres only if the maximum load of the tyres is not exceeded. The load capacity of the tyres decreases as the speed increases.

The maximum permitted axle load and the maximum achievable speed of some VW vehicles are so high that the load capacity of the V tyres is not sufficient for speeds of up to 240 km/h.

example: Tyre 205/55 R 16

91
V

The load index (LI) 91 certifies that this tyre has a load capacity of 615 kg per tyre at up to 210 km/h.

At a speed of 240 km/h, this tyre can carry a load of only 560 kg, i.e. the axle load may not exceed 1120 kg.

The Passat Estate V6 4Motion has a permitted axle load of 1150 kg and an achievable maximum speed of 232 km/h. This vehicle may only travel at speeds of up to 230 km/h with V winter tyres.

This applies to all V winter tyres without special markings.

4.9 Extra Load (XL) V winter tyres

V winter tyres marked XL have a higher load capacity than V winter tyres without this code.

XL V winter tyres allow a higher speed, but this does not mean that the top speed of a V tyre is 240 km/h for every VW car.

The same conditions apply to these tyres as to V winter tyres without a special code

!

Tyre pressure for Extra Load V tyres

Extra Load V winter tyres generally require 0.2 bar greater pressure (this does not apply for the Phaeton 2003 >).

The following table => [page 16](#) shows how fast VW cars may drive with V winter tyres, depending on their respective axle load.

4.10 Maximum speeds for V and Extra Load (XL) winter tyres

Vehicle	Version	Type of drivetrain	Max. axle load	Winter tyres	v _{max} with V winter tyres
Passat 1994 > 2.8l/135 kW VR6	Estate	Syncro	1060 kg	205/50 R 15 86V	210 km/h
Passat 1994 > 2.8l/128 kW VR6	Saloon	Front-wheel drive	1020 kg	205/50 R 15 86V	220 km/h
Passat 1994 > 2.8l/128 kW VR6	Estate	Front-wheel drive	1020 kg	205/50 R 15 86V	220 km/h
Passat 1997 > 2.5 l/110 kW TDI	Saloon	4Motion	1190 kg	205/55 R 16 91V	220 km/h
Passat 1997 > 2.8l/142 kW V6	Saloon	4Motion	1130 kg	205/55 R 16 91V	235 km/h
Passat 1997 > 2.8l/142 kW V6	Estate	4Motion	1150 kg	205/55 R 16 91V	230 km/h
Passat 2001 > 2.8l/142 kW V6	Saloon	4Motion	1190 kg	205/55 R 16 91V	240 km/h
Passat 2001 > 2.8l/142 kW V6	Saloon	4Motion Automatic	1140 kg	205/55 R 16 91V	230 km/h



Vehicle	Version	Type of drivetrain	Max. axle load	Winter tyres	v _{max} with V winter tyres
Passat 2001 > 2.8/142 kW V6	Estate	4Motion	1140 kg	205/55 R 16 91V	230 km/h
Passat 2001 > 2.8/142 kW V6	Estate	4Motion Automatic	1150 kg	205/55 R 16 91V	230 km/h
Passat W8	Saloon	4Motion Manual gearbox	1180 kg	205/50 R 17 93V extra load	240 km/h
Passat W8	Saloon	4Motion Automatic	1230 kg	205/50 R 17 93V extra load	225 km/h
Passat W8	Estate	4Motion Manual gearbox	1180 kg	205/50 R 17 93V extra load	240 km/h
Passat W8	Estate	4Motion Automatic	1230 kg	205/50 R 17 93V extra load	225 km/h
Passat Protect 2.8/142 kW V6	Saloon	4Motion Manual gearbox	1260 kg	205/55 R 16 94V extra load	225 km/h
Passat Protect 4.0 I/202 kW W8	Saloon	4Motion Automatic	1340 kg	205/55 R 16 94V extra load	210 km/h
Sharan 2001 > 2.8/150 kW VR6	Saloon	Front-wheel drive	1,280 kg	205/55 R 16 94V extra load	210 km/h
Sharan 2001 > 2.8/150 kW VR6	Saloon	4Motion	1,330 kg	205/55 R 16 94V extra load	210 km/h

Registration regulations in the Federal Republic of Germany

Only when winter tyres are in use may the top speed that a vehicle can achieve be greater than the maximum speed specified by the speed symbol of the tyre.

In this case, a label stating the following must be attached:

Important! Winter tyres!
Maximum speed ... km/h



Note

This label must be clearly visible to the driver!

Winter tyre pressures

The tyre pressure for winter tyres must be 0.2 bar more than the applicable tyre pressure for standard tyres but not more than 3.5 bar.

4.11 Reinforced and Extra Load (XL) tyres

Some tyre manufacturers have for some time replaced the designation „Reinforced“ with the designation „Extra Load“. This designation has long been standard in non-European countries. Technically, there is no difference between them.

Some tyre manufacturers also use the designation „XL“ for Extra Load tyres.

Tyres with the designation „Reinforced“ or „Extra Load (XL)“ are of equal quality.

4.12 Snow chains

Snow chains must be fitted to driven wheels only.



On most four-wheel drive vehicles, snow chains may be used only on the front wheels, but on the Touareg, also the rear wheels.

It is not possible to use snow chains with all wheel and tyre combinations. Notes on this can be found in the vehicle tables of the parts certificate.

If no particular type of snow chain is specified, then small-link chains may be used. These, including the chain fastener, may not protrude more than 15 mm beyond the wheel's tread and the inner wall.

On some models, only special, small-link chains are possible with certain wheel and tyre combinations. Notes on this can be found in the vehicle tables of the parts certificate.

The maximum speed permitted by law when driving with snow chains is 50 km/h.

Snow chains should be removed when there is no snow on the road. There is no point in having them on the wheels, as they adversely affect the vehicle's handling. It causes unnecessary stress on the tyres and above average wear on the chains.





5 Tyre wear/ mileage for passenger car tyres

5.1 General

A tyre has to meet numerous requirements ⇒ [page 19](#) .


Different types of tyres meet these requirements to varying degrees.

Depending on the conditions in which the tyres are used and on the type of vehicle, some requirements will be more important than others.

H, V, and Z tyres for „high-performance vehicles“ are expected to have good grip on wet and flooded roads. On the other hand, they cannot have such a long mileage expectancy as, for example, tyres with S or T ratings.

5.2 Requirements to be met by tyres

- A - Wet braking properties
- B - Driving comfort
- C - Steering accuracy
- D - Driving stability
- E - Tyre weight
- F - Life expectancy
- G - Rolling resistance
- H - Aquaplaning

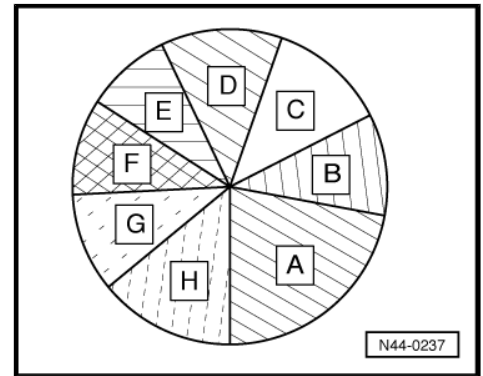

The pie chart illustrates to what extent the tyre meets the various requirements. It shows how the proportions of the requirements A to H can be distributed according to the construction of the tyre and the rubber mixture used.

Improving one of the characteristics will have a negative effect on one of the others.

Example:

An improvement in wet braking properties -A- leads to a reduction in driving comfort -B-, rolling resistance -G- and life expectancy -F-.

The life expectancy of passenger vehicle tyres does not just depend on the rubber composition and design of a tyre. The conditions for use, the vehicle-specific circumstances and driving style have a heavy influence on the service life of a tyre.

Modern vehicles with the appropriate engine allow a gentle, economical driving style but also an extremely sporty driving style. A tyre life of 5,000 to 40,000 km or more is possible.



Note

The driving style is the most important factor in determining the service life of a tyre.

5.3 Wear behaviour of high-speed tyres

These tyres are designed for use at high speeds. The main objective in the development of this type of tyre is good grip on wet



surfaces. The tread compositions do not have the same wear resistance as T and H tyres for lower speeds.

The expected life of high-speed tyres is therefore considerably lower under comparable operating conditions.

5.4 Factors influencing the service life of a tyre

The following factors influence a tyre's service life to varying degrees.

Driving style:

- ◆ Speed ⇒ [page 20](#)
- ◆ Braking ⇒ [page 20](#)
- ◆ Acceleration ⇒ [page 21](#)
- ◆ Cornering ⇒ [page 21](#)

For more information about driving style ⇒ [page 20](#) .

Maintenance:

- ◆ Tyre pressure ⇒ [page 21](#)

For more information about maintenance ⇒ [page 21](#) .

Environment:

- ◆ Road surface
- ◆ Ambient temperature and climate

Vehicle:

- ◆ Weight
- ◆ Dynamic toe and camber settings

Tyre use:

- ◆ Speed range
- ◆ Wet or dry

Tyre type:

Winter or summer

5.5 Driving style

I. Steady driving without deceleration or acceleration

Example:

Speed (km/h)	Wheel slip	Wear
100	1	1
180	3	9

II. Braking (driving style)

Most wear occurs during braking.

Example: Braking from a speed of 50 km/h

Braking distance (m)	Deceleration (m/s ²) ²⁾	Wheel slip	Wear
Vehicle coasting to stop		0	0
100	0.1 x g	4	1
50	0.2 x g	8	4



Braking distance (m)	Deceleration (m/s ²) ²⁾	Wheel slip	Wear
12,5	0.4 x g ³⁾	32	2000 - 3000

2) g = Freefall acceleration: 9.81 m/s²

3) A deceleration of 0.4 x g corresponds to heavy braking.

III. Acceleration (driving style)

Wheel slip occurring during driving off gently is approximately the same as that occurring during driving at a constant speed of 100 km/h.

Example:

	Wheel slip	Wear
Driving off gently	1 - 2	1
Driving off normally	7 - 8	5
Driving off with wheels spinning	20 or more	100 - 200

IV. Driving through curves (driving style)

A »sporty« driving style and driving at higher speeds in curves also cause greater wear.

In practice, this means that wear is increased 16-fold when the cornering speed is doubled. This is the price that has to be paid for going faster.

Example: Driving through a curve with a radius of 150 m

Speed (km/h)	Lateral acceleration (m/s ²) ⁴⁾	Wear
50	1 = 0.13 x g	1
80	2.5 = 0.33 x g	6.5
100	4 = 0.53 x g	16

4) g = gravitational acceleration: 9.81 m/s²

5.6 Tyre maintenance

Tyre pressure

The vehicle's weight causes the tyre's contact patch to flatten. This causes the tread and the entire bracing plies of the tyre continually to be deformed when a tyre is rolling. Low tyre pressure causes greater deformation, resulting in greater warming and increased rolling resistance. This then leads to increased wear and poses a greater safety risk.

Example: Specified standard tyre pressure with cold tyres, according to vehicle load

Tyre pressure (bar)	Tyre pressure (%)	Tyre life (%)
2.3	100	100
1.9	80	85
1.4	60	60
1.0	40	25

Excessive tyre pressure will lead to increased wear around the centre of the tyre's tread and to poor rolling comfort. We recom-



It is recommended always to maintain the tyre pressure specified by the manufacturer.



Note

- ◆ *The diagrams shown are not applicable in all cases.*
- ◆ *They are intended merely to give an idea of the wear rates of tyres on the front and rear axles and with front-wheel drive and four-wheel drive.*
- ◆ *The tyre service life may differ significantly, depending on operating conditions and running gear.*

Diagram 1:

Tread depth versus tyre life for vehicles with front-wheel drive and V-rated tyres

P - Tread depth

S - Mileage covered

1 - Front axle

2 - Rear axle

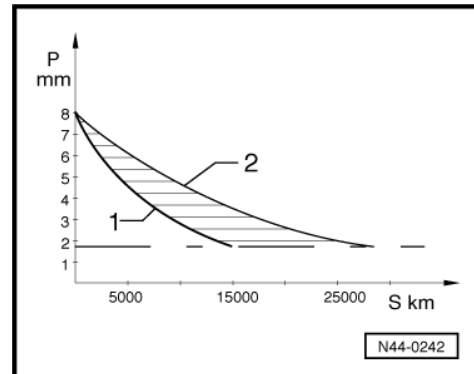


Diagram 2:


Tread depth versus tyre service life for vehicles with four-wheel drive and V-rated tyres

P - Tread depth

S - Mileage covered

1 - Front axle

2 - Rear axle

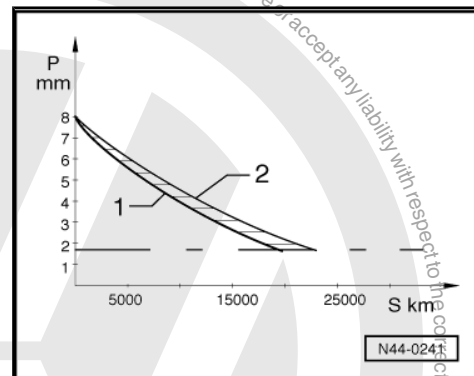

Diagrams 1 and 2 show that the tread on a new tyre wears faster than that on a heavily used tyre. Because the wear curve is not linear, it is not possible to estimate the tyre's expected life on the basis of wear after a distance of 5,000 km.

On front-wheel drive vehicles, the front tyres have to transmit not only the steering and driving forces, but also the greater part of the lateral and braking forces. This causes the front tyres on front-wheel drive vehicles to wear much faster than the rear tyres. Even tyre wear can be achieved by rotating (interchanging) the front and rear tyres on a regular basis. Rotating wheels ⇒ [page 66](#).

5.7 Evenly worn tyres

Demands placed on tyres are becoming ever greater.

This is caused by the following factors:

- ◆ greater vehicle weight
- ◆ high speeds
- ◆ high level of vehicle safety

A greater load on the tyre will, of course, lead to an increase in tyre wear.

Driving style has a critical effect on tyre wear. Therefore, worn tyres with an evenly worn tread cannot be replaced under warranty.



The effective service life of a tyre can be determined only when the remaining tread depth has reached 2 mm (see diagrams => [page 22](#)).

5.8 Measuring tread depth



Note

- ◆ *The tread depth is measured in the main tread channels.*
- ◆ *Do not measure at the TWIs (Tread Wear Indicators).*

Measure the tread depth in the main tread channel, at the points where the tyre is worn most heavily. The position of the TWIs can be seen at various points on the shoulder of the tyre => [Item 2 \(page 9\)](#) .

A „Δ“ or the manufacturer's „logo“ may appear in the place of „TWI“.



The bars of the TWI have a height of 1.6 mm. This is the minimum tread depth required by German law.

Different values may apply in other countries.

The TWIs must not be included in the measurement. Tread depth should always be measured at the deepest point of the tread channel.

A - TWIs in the main tread channels

B - Main tread channels with TWIs -arrows

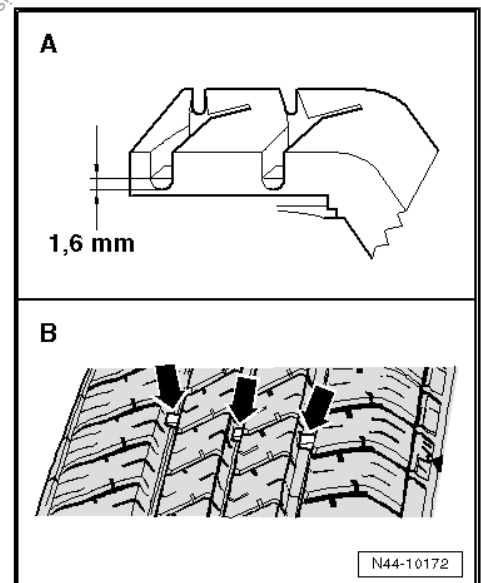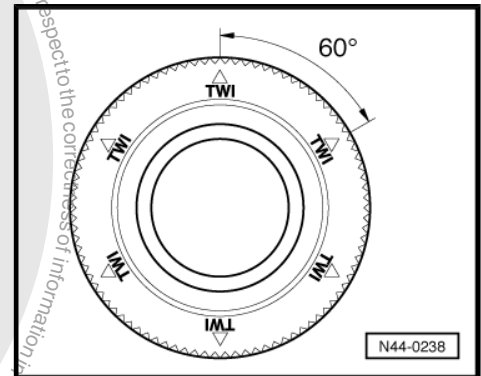

5.9 One-sided wear

This is often caused by driving style, but can be the result of incorrect wheel alignment.



Increased one-sided wear


One-sided wear, usually in conjunction with signs of scuffing on the ribs of the tread and in the fine grooves, always occurs when the tyres have been allowed to roll with an extreme tyre slip angle, causing them to »rub« on the road surface.

Driving fast on a stretch of road with lots of curves will cause increased wear, in particular on the outer shoulder.

A rounded outer shoulder on the tyre in conjunction with a particularly high degree of wear on the outer tread blocks indicates fast cornering. This wear pattern is influenced by driving style.


To optimise handling, the suspension is set to certain toe and camber values. Increased one-sided wear can be expected if tyres are allowed to roll under conditions which differ from those specified.

One-sided wear is especially likely if the toe and camber have not been set correctly. Moreover, there is a greater risk of diagonal washout.

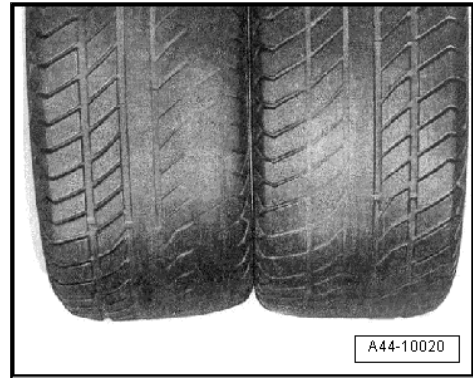

Toe-out or negative toe-in

Distance between the front edges of the wheels -A- is greater than distance between the rear edges of the wheels -B- (-C = direction of travel).

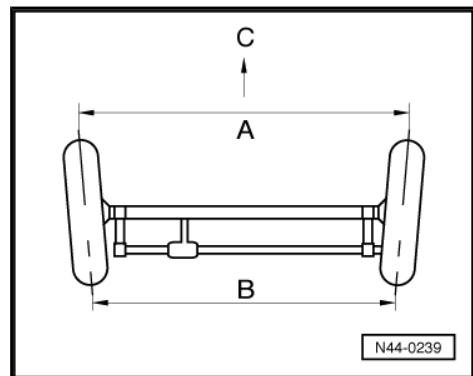




Toe-in or positive toe

Distance between the front edges of the wheels -A- is less than distance between the rear edges of the wheels -B- (-C- = direction of travel).

To prevent one-sided wear, care must be taken to ensure that the wheel is set within the tolerance specified by the vehicle manufacturer. The most frequent deviation of the wheel alignment is caused by external influences, for example hard contact with the kerbstone when parking.

By measuring the axle geometry, you can check whether the wheel alignment is within the specified tolerances or whether it has to be corrected.

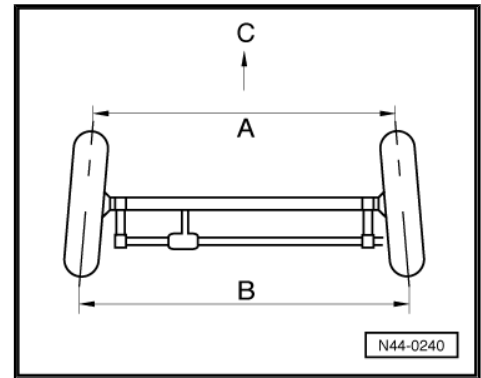

Running gear modifications

Using „suspension-lowering kits“ and/or alloy wheels that have not been recommended by VW may result in altered wheel positions which deviate from the specified alignment.

Even if the axle geometry is correct with the vehicle stationary during wheel alignment, the changed vehicle height and wheel positions can cause the wheel suspension to move differently during operation.

Uneven wear is then unavoidable.

Unsuitable use of self-levelling adjustments on pneumatic suspension system

The use of the offroad level is recommended only for driving off-road. Permanent use of the offroad level during normal road operation can lead to increased tyre wear as the height of the wheel position is different to the road level.

The way to prevent one-sided tyre wear is to ensure the wheel alignment is correct on one hand and on the other hand to make sure the vehicle is used only for its intended purpose:

Regular servicing of the vehicle and tyres helps to prevent tyre wear. The following should be noted in particular with regards to this:

- ◆ The prescribed minimum tyre inflation pressures must be adhered to.
- ◆ Different wear on the front and rear axle is unavoidable depending on the driving style. This condition can be compensated for by swapping over the wheels from front to rear. The ideal opportunity to do this, for example, is during the seasonal change between winter and summer tyres. This change also has a positive side effect in that the tyres can wear down equally, meaning that a completely new set of tyres can be fitted. This prevents the use of tyres with different tread depths on both axles, which can have negative effects on road holding.
- ◆ Saw tooth formation is a normal wear pattern, particularly where the driving style is very careful ⇒ [page 29](#) . This can lead to an increase in rolling noise, which generally becomes better as the tread depth becomes less. In the event of light saw tooth formation or if saw tooth formation is just starting, exchange of the wheels between axles is normally sufficient. In cases where saw tooth formation is very pronounced, the wheels have to be changed in accordance with ⇒ [page 29](#) so their direction of rotation is reversed.



- ◆ Some tread patterns may create an impression of premature wear: if winter tyre sipes or channels in the tread are worn down, only compact profile blocks without patterns remain, thus giving the impression of a worn tyre. In this case, the remaining tread depth must be measured in each profile groove. If this is down to or beyond the minimum tread depth (Germany 1.6 mm, it is recommended to use winter tyres that are worn down to 4 mm only in summer [legal requirement in Austria]), the tyre can continue to be used without restrictions.

5.10 Outer shoulder wear

Unsuitable use of self-levelling adjustments on pneumatic suspension system

The use of the offroad level is recommended only for driving off-road. Permanent use of the offroad level during normal road operation can lead to increased tyre wear as the height of the wheel position is different to the road level.

The way to prevent one-sided tyre wear is to ensure the wheel alignment is correct on one hand and on the other hand to make sure the vehicle is used only for its intended purpose:

Regular servicing of the vehicle and tyres helps to prevent tyre wear. The following should be noted in particular with regards to this:

- ◆ The prescribed minimum tyre inflation pressures must be adhered to.
- ◆ Different wear on the front and rear axle depending on the driving style is unavoidable. This condition can be compensated for by rotating the wheels from front to rear. The ideal opportunity to do this, for example, is during the seasonal change between winter and summer tyres. This change also has a positive side effect in that the tyres can wear down equally, meaning that a completely new set of tyres can be fitted. This prevents differences between the tread depths of the tyres on each axle, which can have negative effects on road holding.
- ◆ Saw tooth formation is a normal wear pattern, particularly if the driving style is very careful ⇒ [page 29](#) . This can lead to increased rolling noise, which generally becomes better as the tread depth decreases. In the event of light saw tooth formation or if saw tooth formation is just starting, exchanging the wheels between axles is normally sufficient. If saw tooth formation is very pronounced, the wheels have to be changed in accordance with ⇒ [page 29](#) so their direction of rotation is reversed.
- ◆ Some tread patterns may create an impression of premature wear: if winter tyre sipes or channels in the tread are worn down, only compact profile blocks without patterns remain, thus giving the impression of a worn tyre. In this case, the remaining tread depth must be measured in each groove. If this is at or below the minimum tread depth, the tyre can continue to be used without restrictions. (In Germany, the minimum is 1.6 mm; it is recommended, and in Austria, required, that winter tyres that are worn down to 4 mm be used only in summer)

5.11 Wear in middle of tyre

This wear pattern is found on the driven wheels of high-performance vehicles that are frequently driven long distances at high speeds.

At high speeds, centrifugal forces cause the tyre diameter to increase more in the middle of the tread than it does at the shoulder. This causes drive forces to be transferred to the road surface from



the centre section of the tread. This is reflected in the wear pattern.

Effects of this kind can be especially pronounced on wide tyres.

It is not possible to counter this wear pattern by reducing the tyre pressure.



WARNING


For reasons of safety, the tyre pressure must not under any circumstances be reduced below the specified tyre pressure.

A more or less even tread wear pattern can be achieved by rotating the tyres between the driven wheels and non-driven wheels in good time.

Increased tread wear

The typical tread wear pattern of tyres run on the driven wheels of a high-performance vehicle.

The increased wear in the centre section of the tread results from the extra load associated with centrifugal forces within the tyre and the transmission of drive forces.

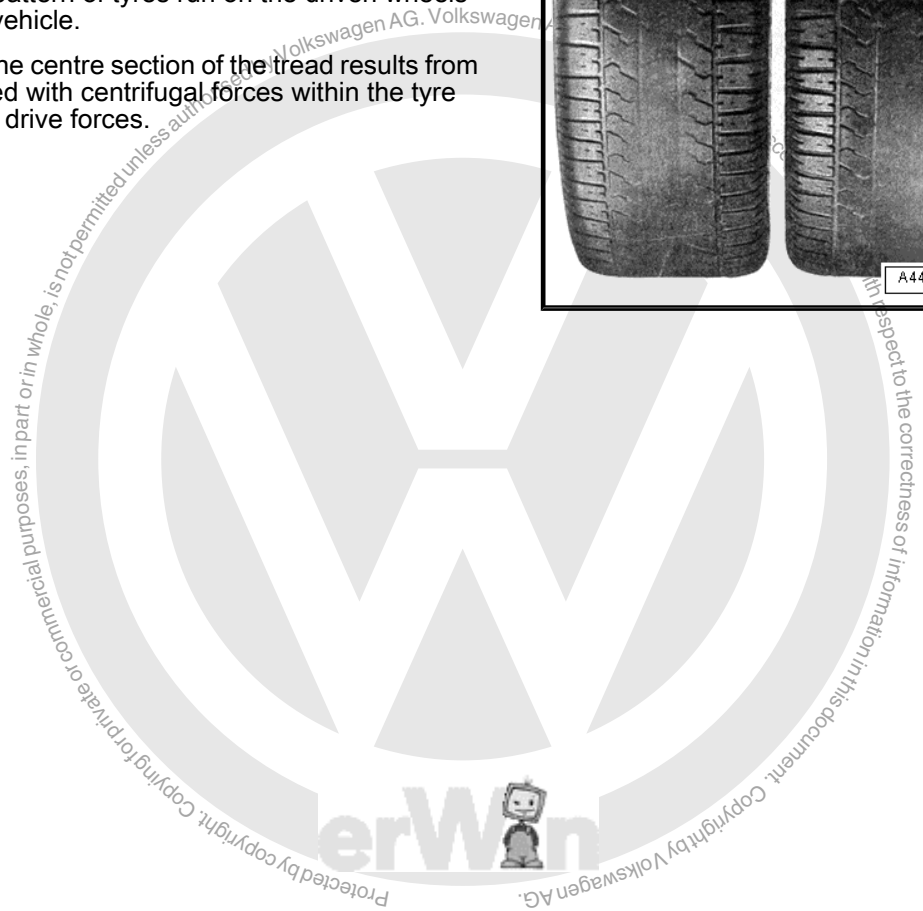



5.12 Diagonal washout

Diagonal washout on a tyre

Diagonal washout runs at an angle of approx. 45° to the circumference.

It usually occurs at one point only, but can also occur at several points around the circumference of the tyre.

Washout occurs almost exclusively on the tyres on the non-driven wheels, in particular at the rear left. Washout occurs very often on some models, while it poses no problem at all on other models. The effect is intensified by high toe-in values. Toe-in values in the region of the lower tolerance limits of the specified alignment values improve the wear pattern.

The most pronounced diagonal washout is often found in the area where the tyre components are joined.

Wheels with positive toe-in roll with a slip angle even straight ahead. This leads to a diagonal strain in the contact patch or footprint on the tyre/road surface.


This wear pattern is intensified when tyre pressure is too low. To avoid such tread wear patterns, the toe-in values of the two rear wheels should be identical and the specified tyre pressures observed.

If washout is detected at an early stage, the wheels should be fitted on the drive axle. Deeper washout cannot be repaired.

Faulty adjustment

If a customer complains of „diagonal wear spots“, the toe adjustment must be examined. If toe-in is correct, the cause of the diagonal washout is very probably the tyre itself.

Tyres with diagonal washout caused by incorrect wheel alignment are not covered by warranty.

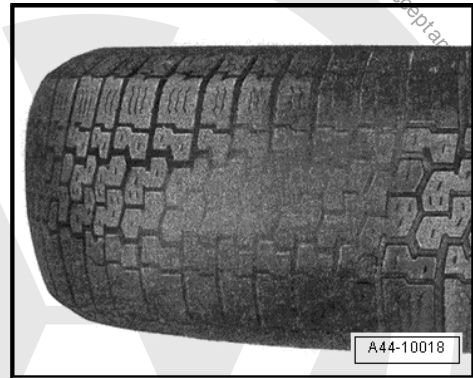



6 Tyre noise

6.1 General notes on tyre noise

Tyre noise that can be heard by the human ear is caused by vibrations which are transmitted by the air from the source of the sound to our ears.

Of interest here are the noises caused by certain characteristics and effects of the rolling tyre (source of the sound).

The cause of the noise is largely dependent on the combination of the road surface and tyres.

The structure and material of the road surface will greatly affect tyre noise. For example, the noise level on a wet road is much higher than on a dry road.

The pattern of the tyre tread also has a significant influence on tyre noise. Tyres with transverse grooves at an angle of 90° generate more noise than tyres with grooves running diagonally.

Small tread blocks are unstable. Their highly pronounced deformation agitates the air as the tyres roll. This creates vibrations in the air which cause tyre noise.

Wider tyres are louder. They need more tread channels to displace water. When the tyres roll, these tread channels displace the air, also creating vibrations in the air.

Further effects that also influence tyre noise:

- ◆ „Tyre vibration“ is the principal cause of tyre noise. It is caused by the columns of air in the tread channels being agitated.
- ◆ „Air pumping“ is the compression and expansion of the air caused by the deformation of the tread blocks as the tyre contact patch moves along the road surface.

Useful information regarding tyre noise

Tyre noise is determined primarily by the tyres and the road surface.

The roughness, structure and material of the road surface influence tyre noise.

The widths of the tyre and the rim, among other things, influence tyre noise. Due to their larger contact area, wider tyres will cause more tyre noise than narrow tyres, as more air has to be displaced and more „mass“ is agitated to create vibrations.

A wider wheel rim will also cause a tyre to have a wider contact patch. The effect on tyre noise is thus very similar to that of a wider tyre. Moreover, the damping characteristics of the tyre may also be adversely affected by the wider wheel rim.

Tyre noise of a vehicle with front-wheel drive is more perceptible in the rear because wind and the engine noise are not as loud there.

6.2 Saw-tooth wear

Saw-tooth wear is a stepped wear pattern on the individual tread blocks ⇒ [page 30](#) that can cause increased tyre noise. The saw tooth is caused by uneven deformation of the tread blocks in the tyre's contact patch. Saw-tooth wear is more pronounced on non-driven wheels than on driven wheels.



New tyres are more susceptible to saw-tooth wear because of the greater elasticity of the high tread blocks. As the tread depth decreases, the tread blocks become more rigid and the tendency to wear in a saw-tooth pattern decreases.

Appearance of saw tooth

A - Tread block of a new tyre; seen in direction of rotation -arrow 1-; tread blocks are equally high in front and back.

B - Development of saw teeth; seen in the direction of rotation -arrow 1-, tread blocks are higher in front -arrow 2- than in back.

C - Seen in the direction of rotation -arrow 1-, tread blocks show greater wear in the front section of the „saw tooth“ -arrow 3-.

Pronounced saw-tooth wear can lead to customers complaining about tyre noise.

Pronounced saw-tooth wear occurs under the following conditions:

- ◆ toe-in values are too high
- ◆ tyre pressures are incorrect
- ◆ tread is coarse and open
- ◆ tyres are fitted on the non-driven axle
- ◆ very fast cornering

non-directional tyres


In the event of saw-tooth wear, the direction of rotation of the tyre must be reversed. If saw-tooth wear is especially pronounced and tyre noise has increased, interchange the tyres diagonally. This will reduce the saw-tooth effect.

On front-wheel-drive vehicles, this effect is intensified by the greater wear on the front axle.

Tyre noise will be somewhat louder immediately after the tyres have been interchanged but will return to a normal level after about 500...1,000 km have been driven.

Directional tyres

In the event of increased saw-tooth wear on the rear tyres – in particular on front-wheel drive vehicles – interchange the front and rear tyres. In the event of increased saw-tooth wear on the outer edges of the tyres on one axle, turn both tyres around on their rims. The left-hand wheel must then be fitted on the right side of the vehicle and the right-hand wheel on the left side.

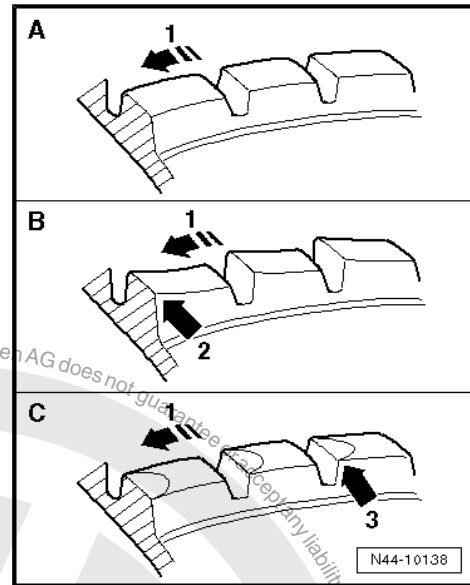

6.3 Flat spots (from locking wheels)

Flat spots result from hard braking which causes the wheels to lock so that the rubber is worn off at the contact patch between the tread and the road surface.

As the tyres slide over the road surface, friction generates heat, which reduces the tread material's resistance to wear.

Not even the most wear-resistant tread compound can prevent the flat spots caused by extreme braking.

Even ABS-controlled brake systems cannot prevent brief locking of the wheels, and thus, minor flat spots.

The degree of such wear depends largely on the vehicle speed, the road surface and the load placed on the wheel. The following examples should make this clear.




If a vehicle is braked to a standstill on a dry surface with the wheels locked, the amount of rubber worn from the tyre will cover an area the size of a postcard and will have a thickness of:

- ◆ up to 2.0 mm from a speed of 57 km/h (23.8 m braking distance)
- ◆ up to 3.3 mm from a speed of 75 km/h (41.8 m braking distance)
- ◆ up to 4.8 mm from a speed of 92 km/h (71.6 m braking distance)

Flat spots in tread

Tyres with such damage must no longer be used and must be renewed.

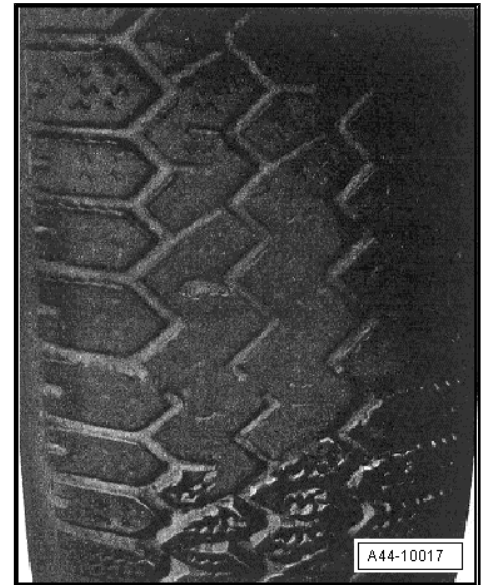



7 Vibration caused by wheels and tyres

7.1 Causes of vibration

There are numerous causes for vibration. Vibration can be caused by tyre wear, among other things. Tyre wear caused by driving is not always uniform across the entire tread of the tyre. This causes slight imbalances which affect the smooth running of a wheel which was previously exactly balanced.

Minor imbalances will not be felt at the steering wheel, but that does not mean that they are not there. They increase wear on the tyre, thus reducing the tyre's service life.

Recommendation

To ensure

- optimal safety,
- smoothest possible running and
- even wear

throughout a tyre's service life, we recommend having the wheels and tyres balanced at least twice during the tyre's service life.

7.2 Balancing wheels

Before you start balancing the wheels, the following requirements must be met.

- The tyre pressure must be correct.
- The tyre tread must not show one-sided wear and should be at least 4 mm deep.
- The tyre must not show any signs of damage, for example cuts, piercing, foreign bodies, etc.
- The wheel suspension, steering and steering linkage, including the shock absorbers, must be in perfect condition.
- You must have conducted a road test.

7.3 Conducting a road test before balancing wheels

If a customer brings a vehicle to the workshop complaining about „vibration“, a road test is essential prior to balancing the wheels.

- ◆ This will give you information about the nature of the vibration.
- ◆ You will be able to determine in which speed range the vibration occurs.
- Raise the vehicle on a lifting platform immediately after the road test.
- Mark the positions of the tyres on the vehicle.

Tyre position	Marked with ...
Front left tyre	FL
Front right tyre	FR
Rear left tyre	RL
Rear right tyre	RR

- Remove wheels from vehicle.



- Balance wheels.

7.4 Balancing wheels on stationary wheel balancing machine

Clamp wheel into wheel balancing machine



Note

When balancing tyres, remember that cleanliness is absolutely essential, as indeed it is in the case of any other repair work you carry out. Only then can you attain a flawless result!

Dirt and rust in the area of the contact surfaces and centre of the wheel distort the result.


- Clean the contact surfaces, the centre of the wheel and the recess on the inside of the wheel before mounting the wheel on the wheel balancer.
- Mount the wheel with tyre on the wheel balancer.





Note

- ◆ To clamp the wheel, use e.g. centring system for wheel balancing machines -VAS 5271- .
- ◆ This ensures that the wheel is 100% centred and that the wheel will be clamped without damage!
- ◆ The wheel cannot be centred 100% with conical clamping elements on the wheel balancing machine.
- ◆ A deviation of 0.1 mm from the centre results in an imbalance of 10 grams at the wheel's rim.

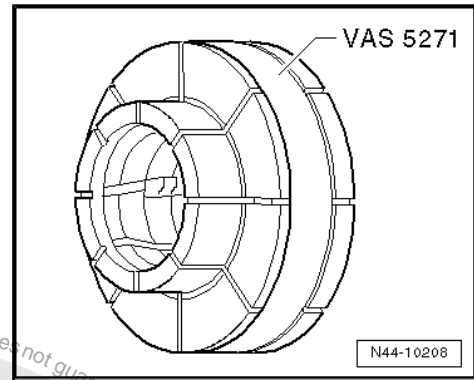

Procedure for balancing wheels and tyres

- Rotate wheel and tyre on wheel balancer.
- Check that the indicator lines on the sidewall of the tyre near the rim flange run evenly.
- Check that the body of the tyre runs evenly while the wheel and tyre are rotating.



Note

If one-sided wear, flat spots from braking or severely washed out spots are apparent, balancing cannot achieve smooth running. In this case, the tyre must be renewed.

- Check the true running of the wheel and tyre. If the wheel and tyre do not run true although there are no flat spots, radial or lateral runout may be the cause.
- Check the wheel for radial or lateral runout ⇒ [page 36](#) .
- If radial and lateral runout are within the specified tolerance, balance the wheel and tyre.



Note

- ◆ More than 60 grams of weight per tyre should not be used.
- ◆ If more weight is required, you may be able achieve smoother running by match mounting the tyre and rim. Match mounting tyres ⇒ [page 38](#) .
- ◆ The wheel balancer display should indicate 0 grams.
- ◆ As an alternative to match mounting, you could use the vibration control system -VAS 6230- ⇒ [page 35](#) .
- Bolt the wheel to the vehicle.
- First hand-tighten the lowest wheel bolt to about 30 Nm.
- Then tighten the remaining wheel bolts diagonally to about 30 Nm. This process centres the wheel on the hub.
- Lower vehicle onto its wheels.
- Now use a torque wrench to tighten the wheel bolts diagonally to the specified torque.

Perform road test

- After balancing the wheels and tyres, perform a road test.



If you detect vibration during the road test, it may be due to tolerance in the wheel centring.

In unfavourable circumstances, the component tolerances of wheels and hubs could cumulate. This too can lead to vibration. This can be alleviated using a finish balancer. => [page 35](#)

7.5 Vibration control system -VAS 6230-


Using the vibration control system -VAS 6230- you can perform more functions than just stationary balancing.

A special feature of this system is the testing of the radial force of the wheel and tyre while rolling.

A roller presses against the wheel with a force of about 635 kg. This simulates the vertical tyre force against the road surface during travel.

Radial and lateral runout in the wheel and tyre and differences in the stiffness of the tyre cause the vertical force of the wheel to vary.

The -VAS 6230- detects and stores the position of the maximum measured radial force in the tyre. Then the position of the smallest distance between the wheel flange and the centre of the rim is measured.

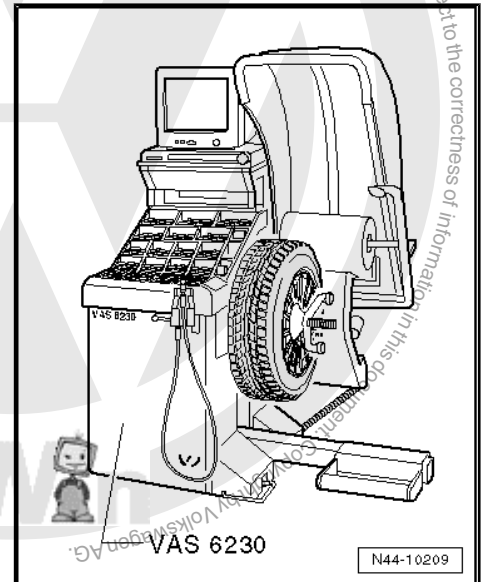

7.6 Finish balancer



Note

- ◆ *Before working with a finish balancer, the mechanic needs to have been instructed by the manufacturer of the balancer.*
- ◆ *To balance the wheels, set the wheels of the driven axle on the sensor platforms (only the front wheels of a front-wheel drive vehicle, all four wheels of a four-wheel drive vehicle).*

If you determine a residual imbalance greater than 20 grams when balancing the wheels, you should rotate the mounting position of the wheel on the hub.

- Mark the point at which the imbalance is indicated.
- Unbolt the wheel and rotate its position on the hub so that the marking points downwards.



Note

The hub must not rotate during this procedure.

- First hand-tighten the lowest wheel bolt to about 30 Nm.
- Then tighten the remaining wheel bolts diagonally to about 30 Nm. This process ensures that the wheel is centred properly on the hub.
- Check whether the imbalance is less than 20 grams using the finish balancer.



Note

The imbalance should always be less than 20 grams before you change the balance weight.

- If necessary, remove the wheel bolts again.
- Rotate the wheel relative to the hub once more, turning it one or two wheel bolt holes further.
- Tighten the wheel bolts using the method described above.



Note

Do not try to reduce the imbalance using balance weights until the imbalance is less than 20 grams.

- Balance the wheels until the imbalance is less than 5 grams.
- Tighten wheel bolts to specified torque setting if you have not already done so.



WARNING

Always tighten wheel bolts to specified torque using a torque wrench!

7.7 Radial and lateral runout of wheels and tyres

Radial and lateral runout occur when the wheel and tyre do not run absolutely true.

For technical reasons, 100% true running is not possible.

Therefore, the manufacturers of these components allow a precisely determined tolerance.

Mounting the tyre in an unfavourable position on the wheel can cause the maximum allowed tolerance for wheel with tyre to be exceeded.

The table shows the maximum permissible tolerances for a wheel with mounted tyre.

Tolerances for radial and lateral runout of wheels with tyres

Wheel with tyre	Radial runout (mm)	Lateral runout (mm)
Passenger cars	0.9	1.1 (1.3 in vicinity of lettering)

7.8 Checking radial and lateral runout on wheels and tyres with tyre gauge -V.A.G 1435-

Checking lateral runout

- Preload tyre gauge about 2 mm.



- Set tyre gauge against sidewall of tyre.
- Slowly rotate the wheel.
- Note the smallest and the largest dial readings.

i Note

If the difference is greater than 1.3 mm, the lateral runout is too great.

In this case, you can reduce lateral runout by match mounting the tyre => [page 38](#) .

Extreme values on the tyre gauge due to small irregularities in the rubber may be disregarded.



Checking radial runout

- Preload tyre gauge about 2 mm.
- Set the tyre gauge against the tyre tread.
- Slowly rotate the wheel.
- Note the smallest and the largest dial readings.

i Note

If the difference is greater than 1 mm, the radial runout is too great.

In this case, you can reduce radial runout by match mounting the tyre => [page 38](#) .

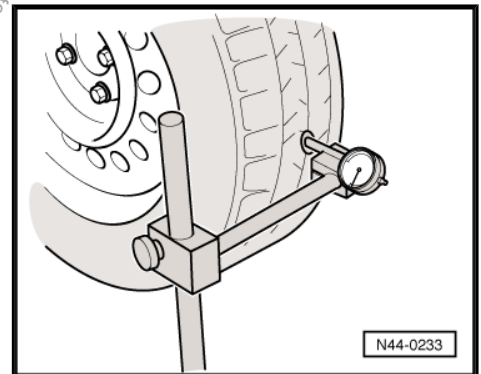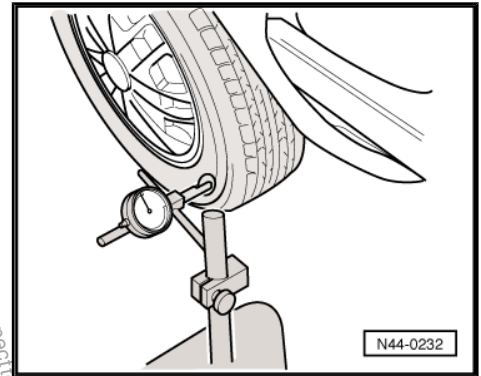


7.9 Checking radial and lateral runout on wheel rim

- Mount the wheel on the wheel balancer .
 - Use the wheel balancing machine centring system -VAS 5271- .
 - Preload tyre gauge about 2 mm.
 - Slowly rotate the wheel.
 - Note the smallest and the largest dial readings.
- S - Lateral runout
H - Radial runout
- Compare the measured values with the specifications in the table => [page 37](#) .

i Note

Extreme values on the tyre gauge due to small irregularities may be disregarded.

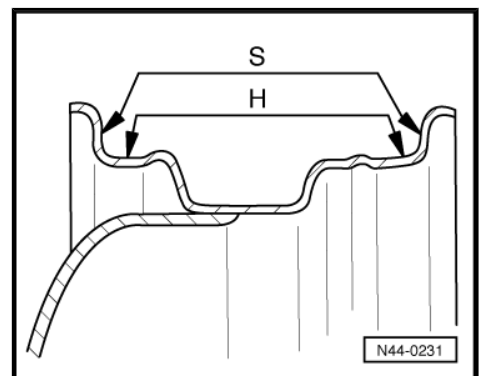

Specifications for radial and lateral runout on wheel rim

Wheel	Radial runout (mm)	Lateral runout (mm)
Passenger cars	0.5	0.5



	Wheel	Radial runout (mm)	Lateral runout (mm)
	Alloy wheel	0.5	0.8
Sharan	Steel wheel	0.5	0.8
	Alloy wheel	0.5	0.5



Note

If the measured value exceeds the specification, acceptably smooth running cannot be attained.

7.10 Match mounting

General

When radial or lateral runout of the wheel and tyre coincide, the imbalance of the wheel is amplified by the tyre.

For technical reasons, 100% true running is not possible
⇒ [page 36](#) .

Before match mounting the used wheels which are fitted on the vehicle, run the tyres warm. This will eliminate any flat spots caused by storage or handling, ⇒ [page 39](#) .

Procedure for match mounting

- Deflate the tyre.
- Press the tyre beads off the rim flanges.
- Coat the tyre bead all round with tyre fitting paste .
- Rotate the tyre 180° relative to the wheel.
- Inflate the tyre to approx. 4 bar.
- Mount the wheel with tyre on the wheel balancer.
- Check true running, that is, radial and lateral runout.



Note

- ◆ *If the specified values for radial and lateral runout are not exceeded, the wheel can be balanced to 0 grams. Specified values appear on ⇒ [page 36](#) .*
- ◆ *If the radial and lateral runout is not within the specifications, the tyre must be rotated again.*
- Deflate the tyre and press the tyre beads off the rim flanges.
- Rotate the tyre 90° relative to the wheel (1/4 of a turn).
- Inflate the tyre to 4 bar again and check true running.



Note

- ◆ *If the specified values for radial and lateral runout are not exceeded, the wheel can be balanced to 0 grams.*
- ◆ *If the radial and lateral runout is not within the specifications, the tyre must be rotated again.*
- Press the tyre off the rim flanges again as described above.



- Rotate the tyre 180° relative to the wheel (1/2 a turn).

If the radial and/or lateral runout is still not within the specifications, check the radial and/or lateral runout of the wheel:
⇒ [page 37](#) .

If the measured values for radial and lateral runout of the wheel are within the specifications, the tyre has an impermissibly high radial or lateral runout. In this case, the tyre must be renewed.



Note

- ◆ *After the tyres have been fitted, there will be fitting paste between the tyres and the rim flanges.*
- ◆ *Therefore, severe braking and acceleration manoeuvres must be avoided for the first 100 or 200 km driven. The tyres may otherwise rotate on the rims and your work will have been in vain.*

7.11 Flat spots caused by storage or handling

What is a flat spot?

The term flat spot describes a type of wear where one patch or spot of the tyre has become flat.

Flat spots caused by storage or handling also cause vibration in the same way as incorrectly balanced wheels do. It is important that flat spots on the tread caused by storage or handling are identified as such.

Flat spots caused by storage or handling cannot be balanced and they can reoccur at any time due to various circumstances. Flat spots caused by storage or handling can be eliminated without complicated special tools. This does not apply to flat spots caused by hard braking ⇒ [page 30](#) .



Note

Flat spots caused by hard braking cannot be repaired. Such tyres must be renewed.

Reasons for flat spots caused by storage or handling:

- ◆ The vehicle has been left standing in one place without being moved for several weeks.
- ◆ The tyre inflation pressure is too low.
- ◆ The vehicle was placed in a paint shop drying booth after being painted.
- ◆ The vehicle was parked with warm tyres in a cool garage or similar for a long period of time. In this case, a flat spot from standing may even occur overnight.

Eliminating flat spots caused by storage or handling

- ◆ Flat spots caused by storage or handling cannot be eliminated from the tyre using workshop equipment.
- ◆ Flat spots caused by storage or handling can be removed only by running the tyres warm.
- ◆ The method described below is not recommended in cold and wintry weather.



Requirements and conditions:

- Check and, if necessary, correct inflation pressures.
- Drive the car on a motorway where possible.
- Traffic and road conditions permitting, drive a 20 to 30 km stretch at a speed of 120 to 150 km/h.



WARNING

- ◆ *Do not endanger yourself or other road users during this road test.*
- ◆ *Observe the highway code and speed limitations in force when performing the road test.*

- Raise the vehicle immediately following the road test.
- Remove the wheels from the vehicle.
- Balance the wheels on a stationary wheel balancer
⇒ [page 33](#) .



8 Vehicle pulls to one side

8.1 General

Perform a road test to determine whether a vehicle is pulling to one side and if so, which side. If the vehicle pulls to one side => [page 42](#) .

When wheel alignment is checked, include the wheel alignment test results in tyre complaint report.


Manufacturer's tolerances can lead to a slight amount of taper (asymmetry) in the tyre carcass. The rolling tyre then develops a lateral force which acts directly on the wheel suspension, leading to self-steering of the vehicle. Strategic rotation of the wheels can compensate for this self-steering behaviour.

8.2 Conicity

Conicity is caused by a slight offset of the tread and/or the belt (amounting to a few tenths of a millimetre) relative to the geometric centre of the tyre. Conicity is not visible and cannot be measured with equipment available in the workshop.

Parts of a tyre

- 1 - Bead
- 2 - Shoulder
- 3 - Tread
- 4 - Steel cord belt
- A - Geometrical centre of tyre
- B - Actual centre of belt. It can be offset to inside or outside

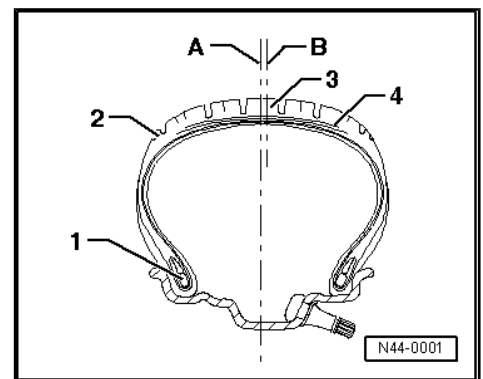



Exaggerated for clarity.

1 - Offset of belt and tread

F1 - Unequal vertical wheel forces

F2 - Unequal vertical wheel forces

Fk - Conicity force

The offset produces differences in stiffness at the inner and outer shoulders of the tyre, resulting in differing vertical wheel forces. Consequently the belt or tread will not be pressed onto the road surface with the same force (F1, F2). A conical, or tapered, shape develops. The resulting force (conicity force Fk) can, depending on the speed, become so great that the vehicle then pulls to one side.

If the force Fk on one wheel of the axle is, for example, 50 Newton, and also 50 Newton on the other wheel, and both forces are exerted in the same direction, the forces are cumulated. Reversing a tyre on the rim can compensate for the lateral pull because the forces then act in opposite directions.

Because the direction in which the force of taper is exerted is not visible, only road tests and strategic rotation of wheels and tyres can establish which tyres cause the pulling.

The tyre consists of numerous components and materials which are vulcanised to form a single part at the end of a complicated manufacturing process. The result is differing production tolerances which make themselves noticeable through more or less strong lateral forces (conicity forces). These forces can also occur in new tyres.

Pulling to one side on front axle


Pulling to one side can be caused by the running gear. However, experience shows that in 90% of all complaints, the tyres cause pulling to one side.

Pulling to one side during normal driving

On a straight, level road surface, the vehicle wants to pull to one side at a constant speed or with moderate acceleration. Force can be felt at the steering wheel.

Pulling to one side during fast acceleration

Pulling to one side during fast acceleration is, in part, due to the basic design of vehicles with front wheel drive. Different friction levels at the left and right wheels or possible irregularities in the road surface (potholes) and consequently varying road adhesion have a substantial influence on the handling characteristics. This does not constitute a complaint which is covered by the warranty.

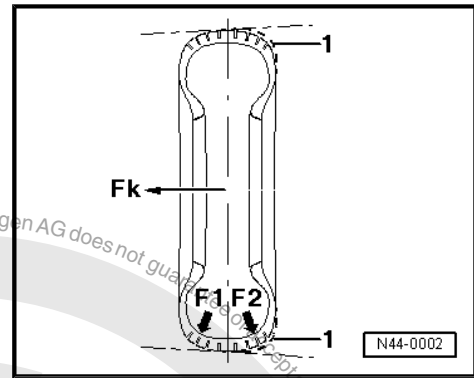

8.3 Remedies when vehicle pulls to one side

Test conditions before and during the road test:

- Check all suspension components on the front and rear axles for damage.
- Check tyre pressure and correct if necessary.
- Check the tyres for external damage. Punctures, cuts, bubbles on the sidewalls, flat spots from braking and/or damage to the tread.
- Ask the customer if the tyre had been damaged by a nail or similar object and was repaired by a tyre dealer. It may be necessary to renew such tyres.



- Check tyres for even wear and tread depth.
- Are all tyres of the same type, manufacture and tread pattern?
- If the tyres are non-directional, ensure that all DOT classifications on the tyre face outwards. The wheels and/or tyres on the vehicle may have already been changed around at an earlier date.
- Is the make of tyre approved by the factory as original equipment?
- Perform the road test on a road which is level, straight and ungrooved and does not drop off to one side.
- Perform the road test with the customer under the conditions specified above. Ask the customer to demonstrate the problem.

i Note

There must be no crosswind during the road test.

If the complaint is justified, we recommend rotating the wheels and tyres as described below.

Before you begin, observe the following notes; otherwise your efforts may not have the desired effect.

i Note

- ◆ *Mark the tyres before the first rotation, e.g. FR, FL, RR, RL.*
- ◆ *After rotating wheels or reversing the tyre on its rim, you must observe very carefully how the vehicle behaves during the road test. Note how and what was changed.*
- ◆ *Assess the intensity of or a possible change in the tendency to pull to one side.*
- ◆ *For this purpose, it is important that the road tests are always performed by the same person on the same road. It is best to drive the „test course“ in both directions.*
- ◆ *Replacing a tyre with a new tyre does not guarantee that pulling to one side will be eliminated. Therefore it is recommended as a first step to carry out the strategic rotation of the wheels as described below.*
- ◆ *If there are large differences in the tread depth of the tyres on the front and rear axles, the tyres with the deeper tread should always be mounted on the front axle.*

8.4 Strategic rotation of wheels having non-directional tyres

↓	
Perform a road test to determine if the vehicle pulls to one side and if so, which side.	
↓	
If the vehicle pulls to one side, interchange the front wheels.	
↓	
Perform road test	
Vehicle travels in a straight line - END	
Vehicle pulls to other side	Vehicle pulls to the same side
↓	↓




Reverse one front tyre on its rim (direction of rotation is reversed).		Interchange front and rear tyres.	
↓		↓	
Perform road test		Perform road test	
Vehicle travels in a straight line - END		Vehicle travels in a straight line - END	
Vehicle does not travel in a straight line		Vehicle does not travel in a straight line	
↓		↓	
Interchange the front and rear wheels.		Vehicle pulls to other side	No change
↓		↓	↓
Perform road test		Reverse one front tyre on its rim (direction of rotation is reversed).	Check alignment of front and rear wheels and adjust if necessary. If the alignment is correct, contact Product Support.
Vehicle travels in a straight line - END			
Vehicle does not travel in a straight line			
↓		↓	
Interchange front wheels.			
↓		↓	
Perform road test		Perform road test	
Vehicle travels in a straight line - END	Vehicle does not travel in a straight line	Vehicle travels in a straight line - END	
	↓	Vehicle does not travel in a straight line	
Mount new tyres on front axle.		Mount new tyres on front axle.	
↓		↓	
Perform road test		Perform road test	
Vehicle travels in a straight line - END		Vehicle travels in a straight line - END	
↓		↓	
Vehicle does not travel in a straight line; contact Product Support.			

8.5 Strategic rotation of wheels having unidirectional tyres

↓
Perform a road test to determine if the vehicle pulls to one side and if so, which side.
↓
If the vehicle pulls to one side, interchange front and back wheels with tyres.
↓
Perform road test
Vehicle travels in a straight line - END
Vehicle does not travel in a straight line
↓
First renew one tyre on the front axle.
↓
Perform road test
Vehicle travels in a straight line - END
Vehicle does not travel in a straight line



↓
Renew other tyre on the front axle.
↓
Perform road test
Vehicle travels in a straight line - END
Vehicle does not travel in a straight line
↓
Check front and rear wheel alignment.
↓
Perform road test
Vehicle travels in a straight line - END
Vehicle does not travel in a straight line; contact Product Support.

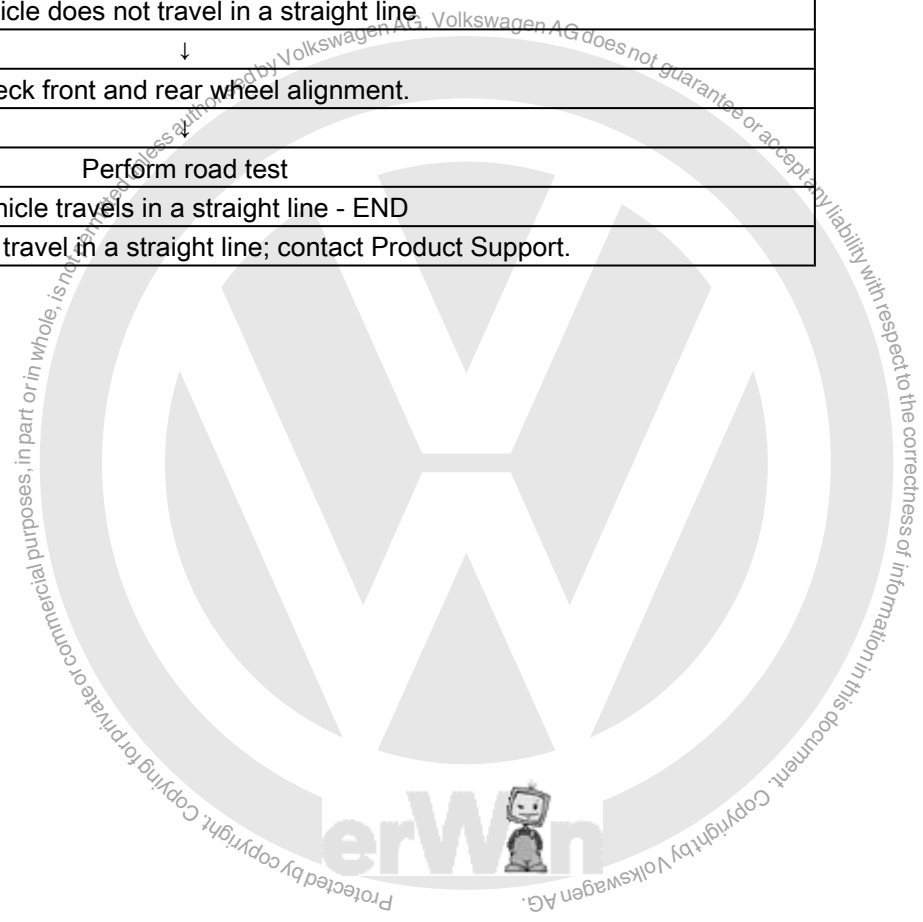



9 Tyre damage

9.1 General information

As tyre damage can have serious consequences, you and the driver should regularly check the tyres to identify any problems at an early stage.

Damaged tyres cannot withstand driving conditions such as high speed, long distances, sporty driving, and so on.

Damage can be caused in a number of ways:

- ◆ Driving with insufficient tyre pressure
- ◆ Assembly error when tyres were fitted on rims
- ◆ Damage by embedding objects
- ◆ Ageing
- ◆ Improper storage



WARNING

Whenever a safety risk cannot be ruled out, the tyre must be renewed.






9.2 Construction of a radial belted tyre

Cross section of a radial belted tyre

- 1 - Tread block
- 2 - Tread groove
- 3 - Tread
- 4 - Nylon ply
- 5 - Belt layers
 - Usually made of steel
- 6 - Bead core
 - Consists of steel wires vulcanised into rubber.
 - Ensures secure seating of the tyre on the rim.
- 7 - Bead filler
- 8 - Rim flange protection
 - Protects the rim and tyre from abrasion from, for example, contact with the kerb
 - Tyres with Maximum Flange Shield (or rim protector bar) are marked with the abbreviation MFS.

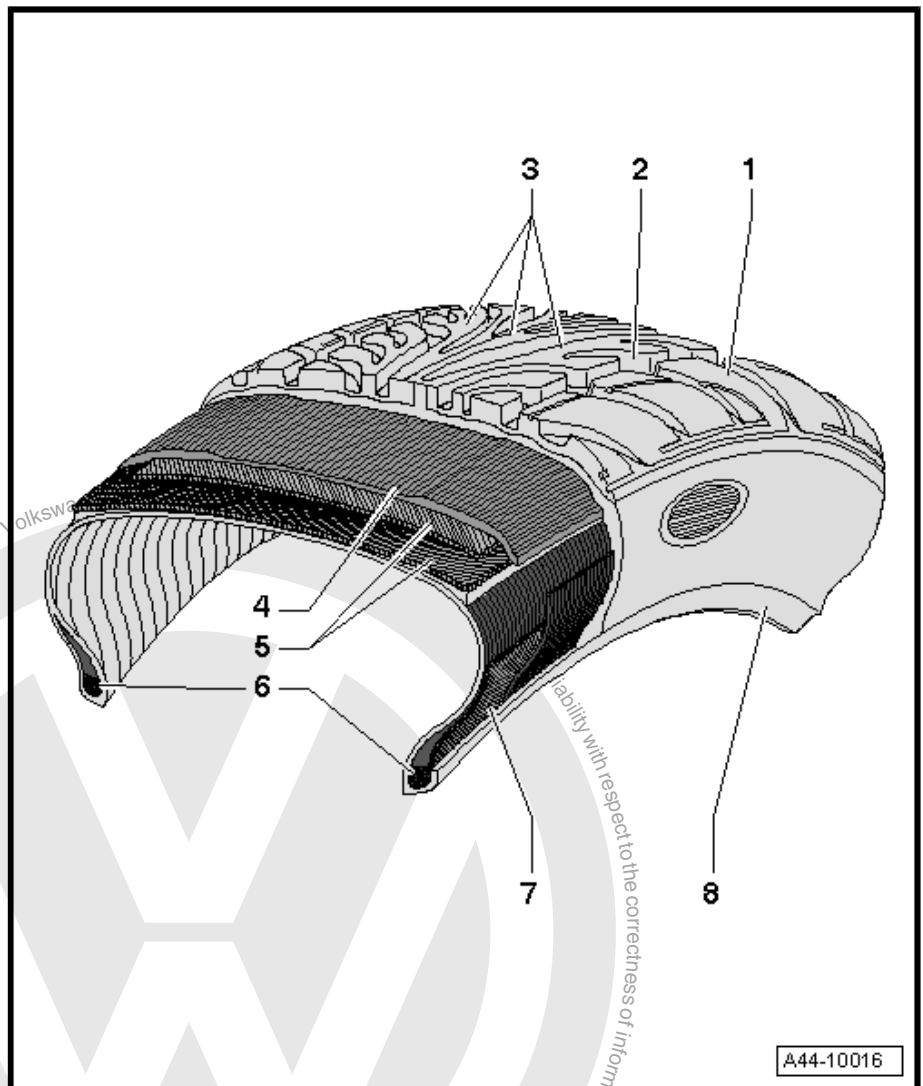

The nylon ply -4-, belt layers -5-, bead cores -6- and bead filler -7- form the carcass. The carcass is the „load-bearing structure“ of the tyre.

9.3 Impact damage

A swelling in the sidewall of the tyre indicates that the substructure of the carcass has been damaged.




Typical causes for such damage include, for example, driving over kerbs at a sharp angle.

Pinching the tyre in this way can damage the carcass.

The substructure of the tyre is stretched so far that individual fibres in the carcass may be broken.

The extent of the damage depends on the speed of impact, the angle of impact, the tyre pressure, the axle load and the type of obstacle.

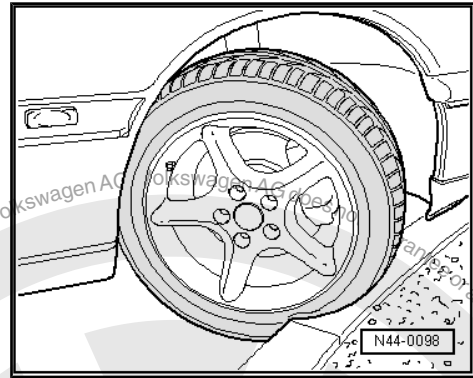


Pinch marks on tyre sidewall -arrows-




Note

- ◆ *Driving over kerbs should be avoided.*
- ◆ *If driving over a kerb is unavoidable, do so very slowly and as square-on as possible.*

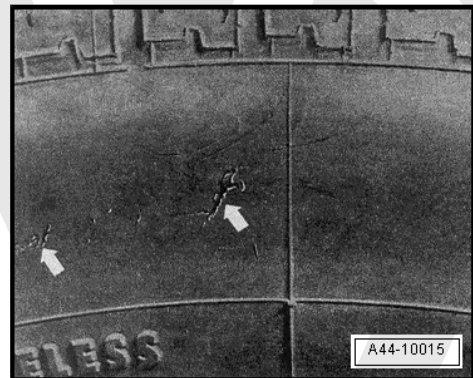


Interior view of a tyre with a punctured carcass

Due to a severe impact, the carcass was pinched on the wheel rim flange and is ruptured in the contact area.

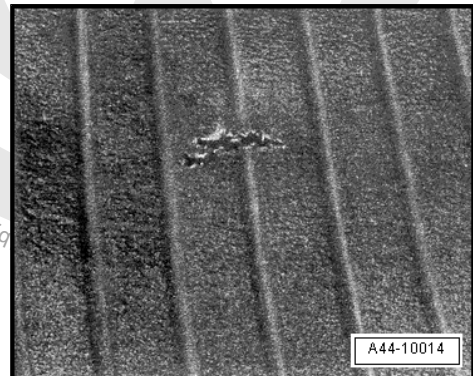

Damage inside tyre due to impact injury (double rupture)


Double rupture -arrows- caused by pinching when a kerb was driven over. Often not detectable from outside.

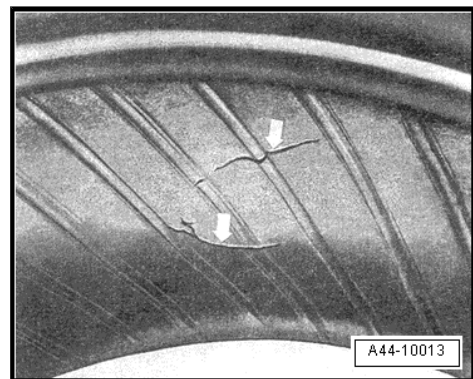



9.4 Cuts

Cut caused by a sharp-edged obstacle -arrow-

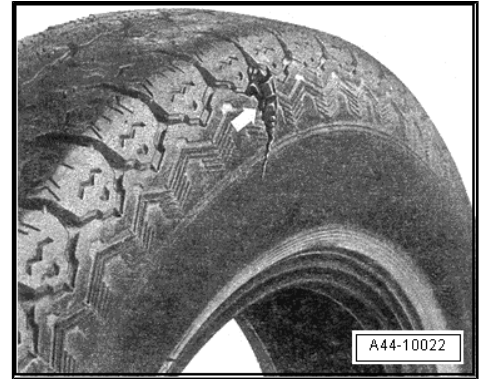

9.5 Damage caused by foreign bodies

Driving over hard, pointed objects like nails, screws and the like can pierce the tyre.

This always leads to tyre damage.


Damage due to embedded foreign body

Often, the object -marking- is so securely embedded in the tyre that it will not free itself even at higher speeds. Consequently, it can act as a plug and seal the tyre relatively well. This results in a gradual loss of pressure, which the driver will not notice immediately, but which can lead to sudden and complete tyre failure.



Note

No repair should be attempted on a steel-belted tyre of which the structure has been punctured by a foreign body.

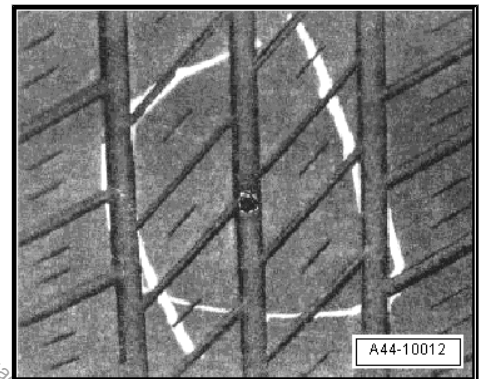

9.6 Loss of air from tyre

If the customer complains of a loss of air from a tyre, it is essential that you check for embedded foreign bodies.



Note

No repair should be attempted on a steel belted tyre of which the structure has been punctured by a foreign body.

Corrosion can develop on the steel wires. This will always lead to the separation of the rubber from the steel belt.

Generally, one cannot determine when the foreign body was embedded. The tyre structure may already have been damaged as a result of driving with insufficient tyre pressure.

Damaged belt wires will sooner or later lead to separation of the rubber from the steel belt. As a result, the tyre can fail completely at some point long after the tyre was first damaged.

Tyre damage caused by foreign bodies is not covered by the warranty.

9.7 Tyre pressure

The tyre pressure must be checked regularly. We recommend checking tyre pressure every two weeks. The correct tyre pressure is especially important during long trips or if a heavy load is



to be carried. A sporty driving style also requires correct or even slightly increased tyre pressure.

Slow loss of tyre pressure

The slow loss of tyre pressure is especially problematic because even experienced drivers often do not notice it.

Insufficient tyre pressure and the related increase in flexing (internal friction) cause the tyre material to heat up considerably and may lead to the separation of the various components and rubber compounds.

In the end, the tyre is usually destroyed completely
⇒ [page 50](#) .

The cause for the slow pressure loss cannot always be determined because the tyre is severely damaged and components of the tyre are missing.

9.8 Tyre damage due to insufficient tyre pressure

The most common causes for tyre failure are minor external damage, a defective valve or a leaking rim due to corrosion or damage.

Separation of carcass and rubber

Excessive heating due to driving with substantially insufficient tyre pressure ⇒ [page 51](#) led to overheating and subsequent separation of the carcass from the rubber material -arrows-

The tyre shown here was periodically driven with an inflation pressure which was insufficient for the load. Typical evidence for this is the circumferential scuffing along the bead caused by the wheel flange and also the discolouration. Small, furrowed creases are visible along the inside of the sidewall.

When the tyre rolls, strong shear forces develop between the layers of steel cord, especially at the ends of the belts.




Tyres with wide, circumferential furrows near the bead

Wide, circumferential furrows near the bead -arrows- indicate that the tyre was driven with insufficient pressure.

Driving a vehicle with insufficient tyre pressure or ignoring or not recognising tyre damage can have serious consequences.

The tyre can no longer withstand the forces which develop when the vehicle is driven.

The defects mentioned above severely restrict the function of the tyre. The rubber compounds separate, which results in the partial separation of tyre components or even its complete destruction.

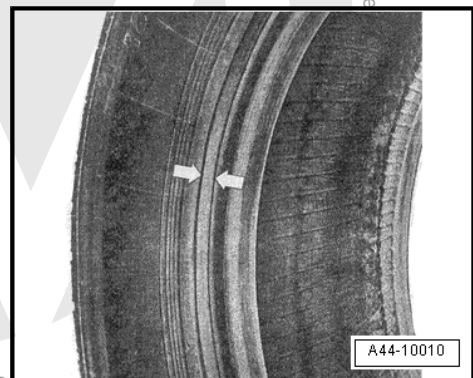



Tyres with stripped profile

Such damage usually develops over a longer period of time. If an already damaged tyre is exposed to high stress, the centrifugal forces which occur at high speeds can tear components off the tyre.

The figure shows a tyre with stripped tread due to travel with insufficient tyre pressure.



9.9 Rising tyre temperature caused by insufficient inflation pressure

The graph shows the temperature development of a tyre at a speed of 180 km/h.


A - When specified tyre pressure is maintained, the temperature will remain stable.

B - Danger zone: When tyre pressure is 0.3 bar below specification, the temperature rises to above 120° C at higher speeds.

C - Critical temperature threshold: A tyre defect will develop.

T - Temperature in °C

t - Travel time in minutes

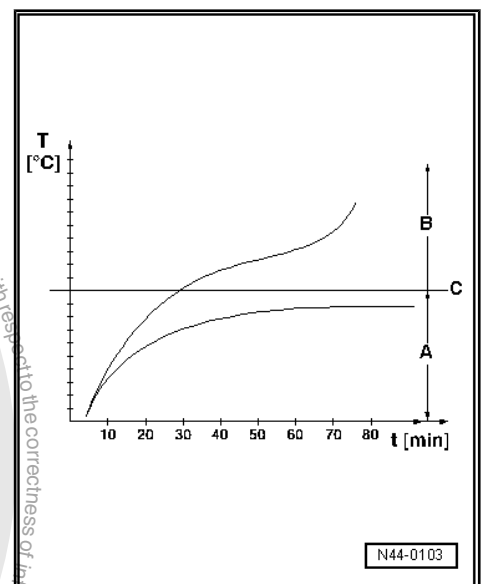



9.10 Tyre damage due to fitting error (fitting damage)

Bead core broken during tyre inflation.


Modern radial tyres for passenger cars are mounted only on safety rims. Safety rims have a hump -1- running along the bead seat.

- 1 - Hump (double hump H 2), extended double hump (EH2)
- 2 - Rim flange
- 3 - Inner bead seat (e.g. tapered bead seat)
- 4 - Rim
- 5 - Wheel
- 6 - Well
- 7 - Outer bead seat (e.g. tapered bead seat)

The hump prevents the tyre from being pressed out of the bead seat during travel with insufficient tyre pressure.

When the tyre is inflated, the bead of the tyre may not slip completely over the outer rim hump.

In this case, there is a danger of the bead core becoming overstretched if the tyre pressure is too high. The steel wires would then rupture partially or completely. A broken bead core cannot be detected from the outside.

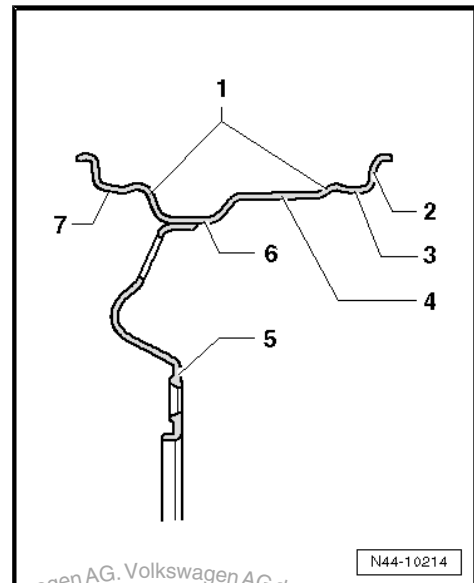

Special requirements for tyres with run-flat properties

Wheel rims with a raised double hump (Extended Hump EH2) are prescribed for tyres with run-flat properties (reinforced side walls) ⇒ [page 57](#) . The raised double hump prevents the deflated tyre from slipping off its seat on the wheel rim when the tyre is run deflated.



Note

To avoid damage, always observe the notes/instructions when fitting/removing tyres with run-flat properties → Running gear, axles, steering; Rep. gr. 44 ; Fitting and removing tyres with run-flat properties .



WARNING

- ◆ **Tyres with damaged bead cores are not seated safely and securely on the rim. Such tyres are a safety risk!**
- ◆ **In addition, there is a risk of the partly broken bead core breaking apart during continued operation and the tyre could suddenly tear open. If the bead core breaks during inflation, the carcass will also be destroyed.**




Tyre with broken bead core and destroyed carcass

The figure shows a tyre with a broken bead core and destroyed carcass as a result of excess pulling force during fitting.

Bead damage due to faulty or incorrect tyre fitting with tyre-fitting machine

The following errors, which may occur when tyres are fitted, can lead to severe tyre damage:

- ◆ If the opposite tyre bead is not seated completely in the rim well when the upper bead is rolled in on the tyre fitting machine. ⇒ [page 52](#) .
- ◆ If the fitting head is improperly adjusted.
- ◆ If the edge of the fitting roller rolls onto the bead.
- ◆ If the guide rollers are worn or have sharp edges.

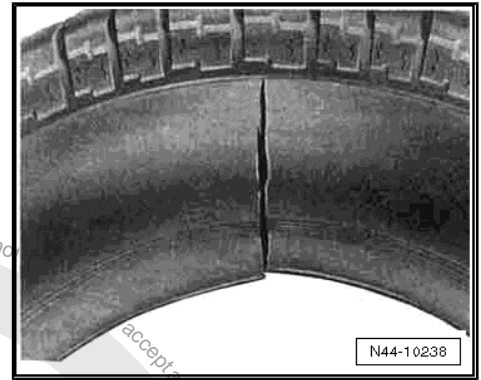

Split tyre bead


In these cases, the bead, which is under great tension, can be cut into in the direction of rotation, split and/or be pinched off down to the core wire.

It is often possible to identify the tracks of the guide roller as it was applied or ran off where the damage occurred.



Note

Both tyre beads as well as the bead seats must always be coated with assembly paste

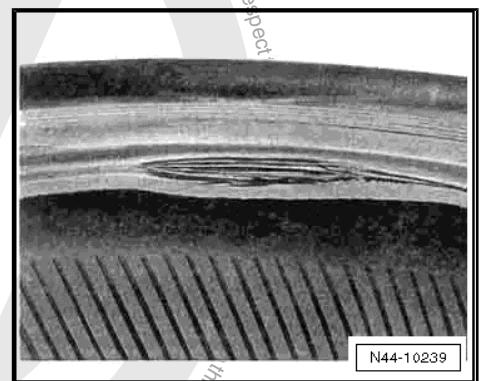

If fitting damage remains undetected, there is a danger that the tyre will fail later during operation.

THEREFORE!

- ◆ Never fit a tyre without using assembly paste .
- ◆ Do not allow the bead seating pressure to exceed 3 bar.
- ◆ Do not allow the tyre inflation pressure to exceed 4 bar.
- ◆ When the tyre has been fitted, reduce the tyre pressure to the specified value.



10 Tyres with run-flat properties

10.1 General

Tyres with run-flat properties have reinforced side walls when comparing them with normal tyres. This reduces the slippage of the side walls and prevents the tyre flanks sticking when the tyres are run deflated. This ensures the vehicle remains controllable and the vehicle has almost normal driving characteristics. The alleviates the necessity to fit the spare wheel in dangerous conditions e.g hard shoulder of a motorway or in bad weather conditions.

A deflated tyre can be driven further to the next workshop (approx. 50 km (approx. 30 miles)) at a suitable speed (max. 80 km/h (max. 50 mph)) and in suitable driving style for the conditions, see => Owner's wallet .

After checking the respective wheel, the responsibility lies with the driver to decide if it is safe to drive further with the deflated tyre.

-I- Tyres with normal air pressure

- 1 - Tyres with run-flat properties (reinforced side walls -red-)
- 2 - Normal tyres

-II- Deflated tyre


When a normal tyre -2- deflates, the side walls are pressed against the wheel rims. The side walls heat up extremely or stick and are therefore destroyed when the tyre is deflated.

Tyres with run-flat properties -1- are supported on the reinforced side walls (-red-). A special tyre mixture and the reduced walkability of the reinforced side walls reduces the heat created when the tyre is run and the vehicle remains controllable.



Note

Please note the special requirements when using tyres with run-flat properties => [page 55](#) .

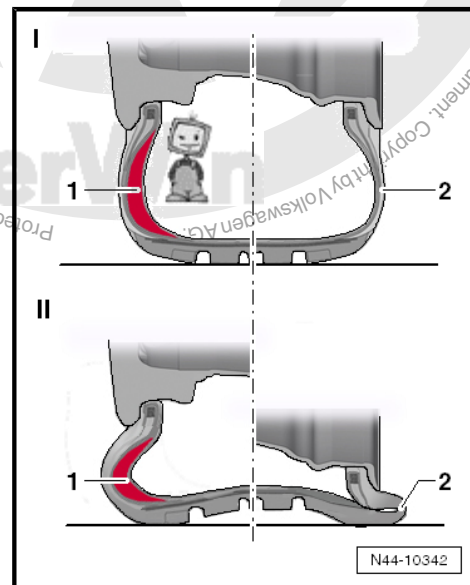



10.2 Design and identification


Identification

Distinguishing features: tyres with run-flat properties can be identified by one of the following abbreviations DSST, Euforia, RFT, ROF, RSC, SSR or ZP. The abbreviation is located on the flank of the tyre following the tyre designation of the respective tyre manufacturer.



Body

- 1 - Beading with beading core
- 2 - Side wall
- 3 - Reinforced side wall
- 4 - Wheel rim with extended hump (EH2) on both sides - prerequisite when using tyres with run-flat properties

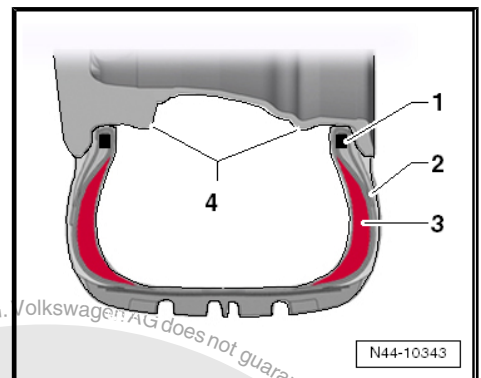

10.3 Retrofitting/requirements when using run-flat tyres



Caution

Retrofitting run-flat tyres to VW models may only be undertaken if the tyres are fitted as standard or they are available as an option.

These tyres may only be used on vehicles with a tyre pressure monitoring system as a pressure loss in the tyres is not always visible. This system warns the driver when an inflation pressure is less than a certain inflation pressure.

Permitted are:

Direct measuring systems ⇒ Running gear, axles, steering; Rep. gr. 44 ; Tyre pressure monitor

Indirect measuring systems ⇒ Running gear, axles, steering; Rep. gr. 44 ; Tyre pressure monitor

Tyres with run-flat properties may only be fitted on disc-type wheels with raised double hump (Extended Hump - EH2)
⇒ [page 57](#) .



The special fitting/removal instructions must be observed ⇒ Running gear, axles, steering; Rep. gr. 44 ; Fitting and removing tyres with run-flat properties .

A mixed installation with standard tyres is not permitted, even on same axle.

Only in exceptional circumstances may a standard tyre be fitted e.g. for a short period or a limited distance. The special run-flat characteristics are lost, the driver must always be informed.

Please observe the recommended tyre manufacture
⇒ [page 458](#) and ⇒ [page 488](#) .

10.4 Repairs



WARNING

- ◆ ***Tyres with run-flat properties must be replaced after they have been run deflated.***
- ◆ ***The special fitting/removal instructions must be observed ⇒ Running gear, axles, steering; Rep. gr. 44 ; Fitting and removing tyres with run-flat properties .***

General information

- As with standard tyre/wheel systems, the disc-type wheel must also be checked before fitting.
- The disc-type wheel must be checked (for true running, runout and other damage) after a tyre has been run deflated ⇒ [page 37](#) , as a pot-hole etc. could cause damage the disc-type wheel rim.
- Damaged disc-type wheels must be renewed.



11 Facts about disc-type wheels (passenger cars)

11.1 Design of disc-type wheel

1 - Wheel rim flange

- Stop for tyre side beading

2 - Hump (H2) on both shoulders of rim

- Prevents the tyre slipping off the shoulder of the rim while driving through tight bends
- Extended hump (EH2) - prerequisite when using tyres with run-flat properties => [page 57](#)

3 - Well

- Eases fitting/removal of tyre

A - Width of wheel rim

- Distance between tyre contact surfaces on both rim edges of wheel
- Dimensions in inches

B - Wheel rim diameter

- Distance between tyre contact surfaces on opposite tyre shoulders
- Dimensions in inches

C - Wheel offset


- Vertical distance between centre of wheel and wheel inner contact surface
- Dimensions in mm

D - Pitch circle diameter

- Diameter of circle for wheel bolt holes
- Dimensions in mm

E - Centre hole

- Used to centralize
- Dimensions in mm

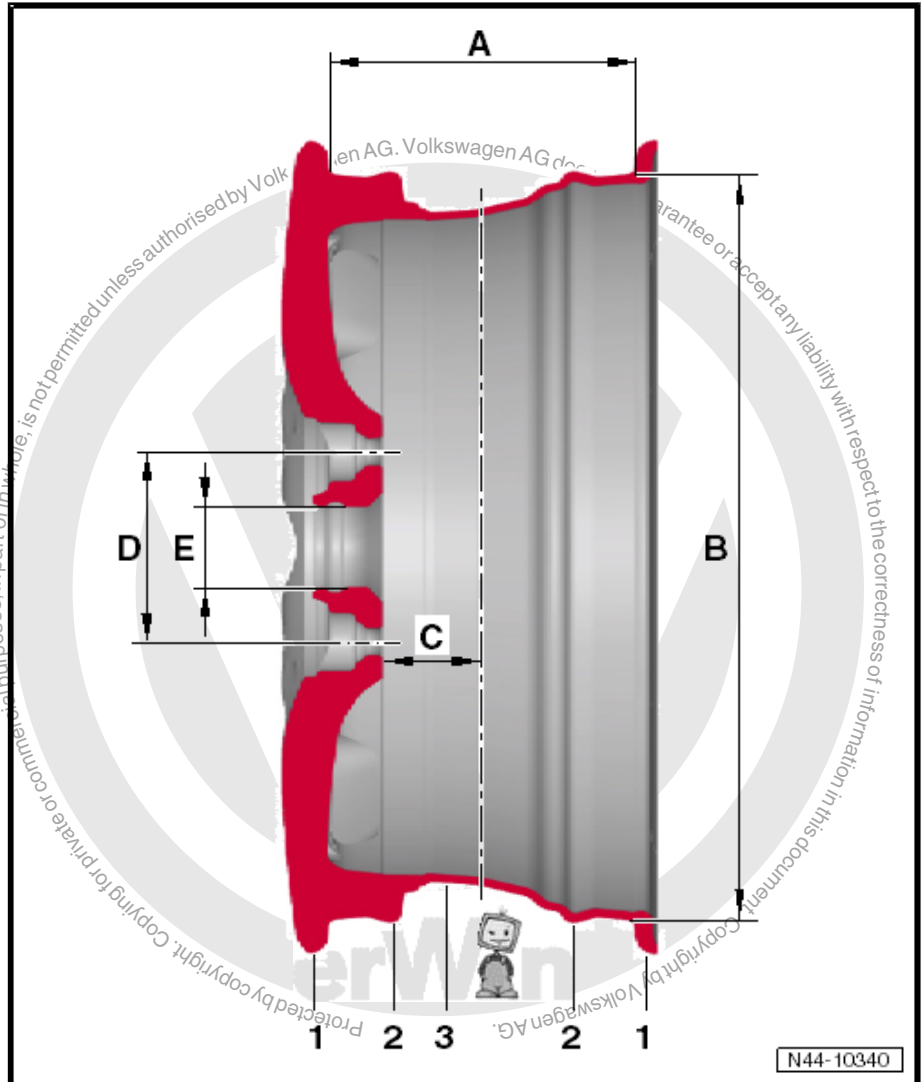

11.2 Data on wheel rims

There are several items of information on the wheel rims. The following example shows the information needed for unambiguous identification of the wheel rim:

Part number:	6E0 601 027 A
--------------	---------------



Wheel size:	6 J x 15 6 - Rim width in inches J - Shape of wheel rim flange 15 - Rim diameter in inches
Wheel offset in mm:	43
Data on hump of bead seat:	EH2 Extended Hump ¹⁾

¹⁾ Raised round hump on both rim shoulders. These ensure that when run-flat tyres are used without air pressure, they will not slip from bead seat. Rims with EH2 are required only if tyres with run-flat capability are fitted! => [page 54](#)

11.3 Wheel rims - pitch circle diameter

Pitch circle diameter	Model		
100 mm	All Golf 1992 >	All Vento 1992 >	
	All Lupo 1999 >	Lupo 3 L, FSI, GTI	
	All Golf 1998 >	All Bora 1998	
	All Polo 1995 >	All Polo 2002 >	
	New Beetle RSi 2001 >		
	All Passat 1994 >		
112 mm	All Passat 1997 >	Passat W8	Passat Protect
	Golf 2004 >	Golf Plus 2005 >	Cross Golf 2007 >
	All Sharan 1996 >		
120 mm	Touareg 2003 >		
130 mm	Touareg 2003 >		

11.4 Split rim composite wheels

Split rim alloy wheels consist of several parts.

The major parts are the rim and the wheel centre. These parts are bolted together with special bolts using a special process. This ensures that the wheel functions properly, that it is sealed and safe and that it runs true. These requirements are not guaranteed with workshop materials and under workshop conditions.



WARNING

You must not dismantle or repair composite wheels!


11.5 Alloy wheels with exchangeable trim elements

These wheels are fitted with exchangeable trim elements. Follow these instructions during installation.



- Clean the thread in the wheel before screwing in the new bolts.
- Always use new bolts!
- 1 - Trim element
- 2 - Hexagon socket head bolt

Torque setting for self-locking hexagon socket head bolts: 5 Nm

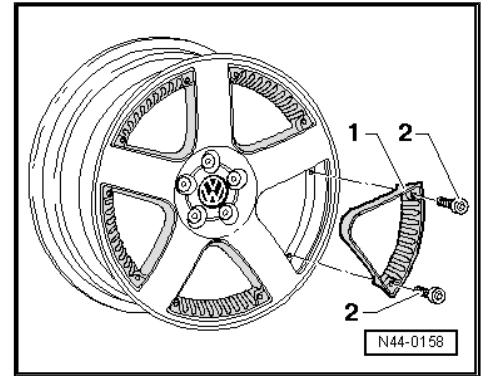


11.6 Alloy wheels with exchangeable trim elements (Zaragoza)


11.6.1 Tools

Special tools and workshop equipment required


- ◆ Cartridge gun -V.A.G 1628-

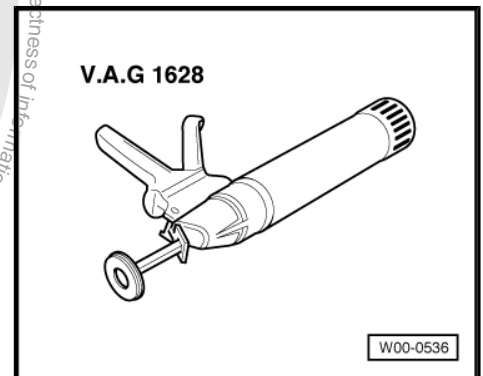

- ◆ Removal wedge -3409-

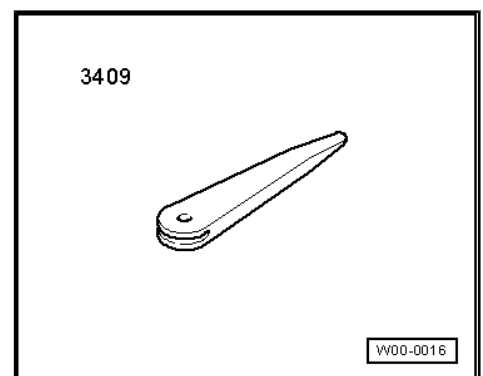

- ◆ Hot air blower -V.A.G 1416-

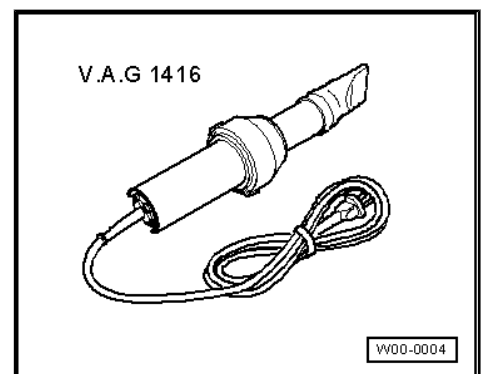




11.6.2 Materials

- ◆ 1K Window adhesive -DH 009 100 A2-
- ◆ Silicone remover -LSE 020 100 A3-


11.6.3 Installing trim element

These alloy wheels are fitted with exchangeable trim elements.
Follow these instructions during installation.

- ◆ Ensure bonding surfaces in alloy wheel and trim element are free of dust and grease.
- ◆ Clean bonding surfaces with silicone remover -LSE 020 100 A3- .

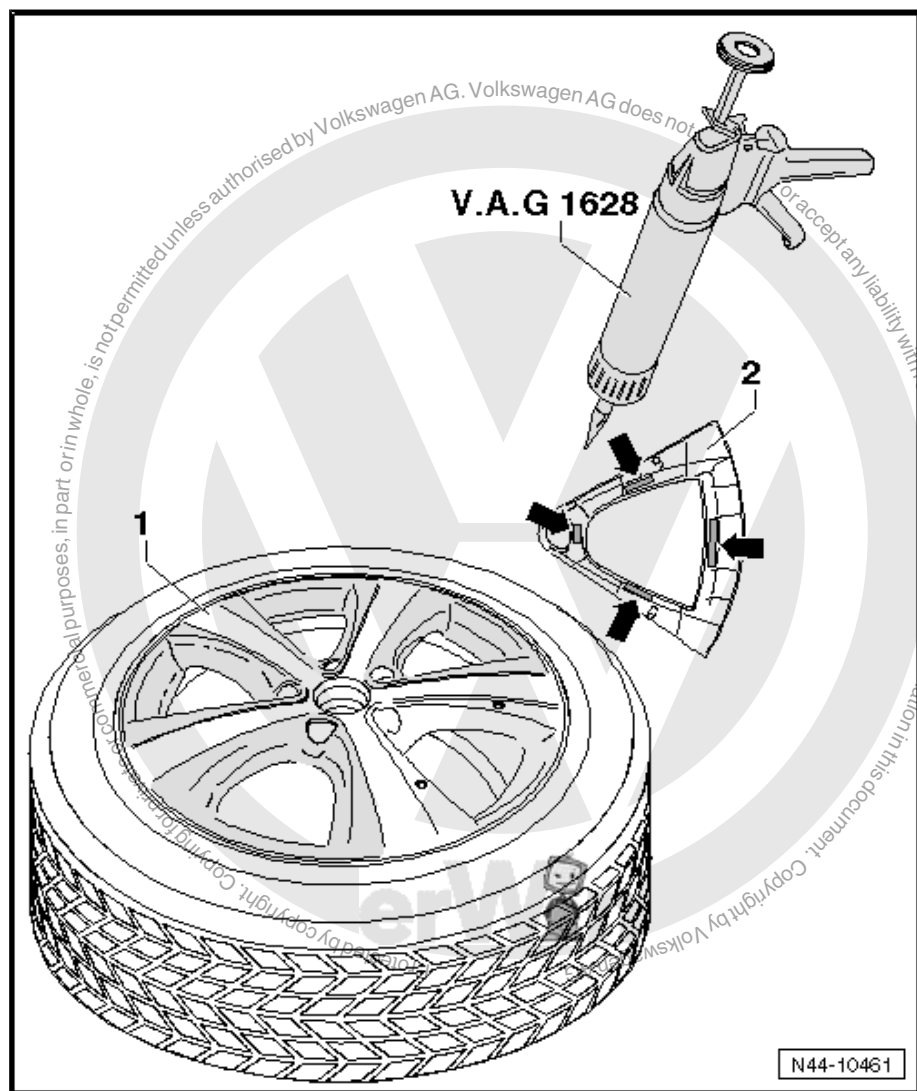

- Apply 1K window adhesive -DH 009 100 A2- to bonding surfaces -arrows- using cartridge gun -V.A.G 1628- .
- Adhesive bead: length = approx. 25 mm and diameter = approx. 10 mm.

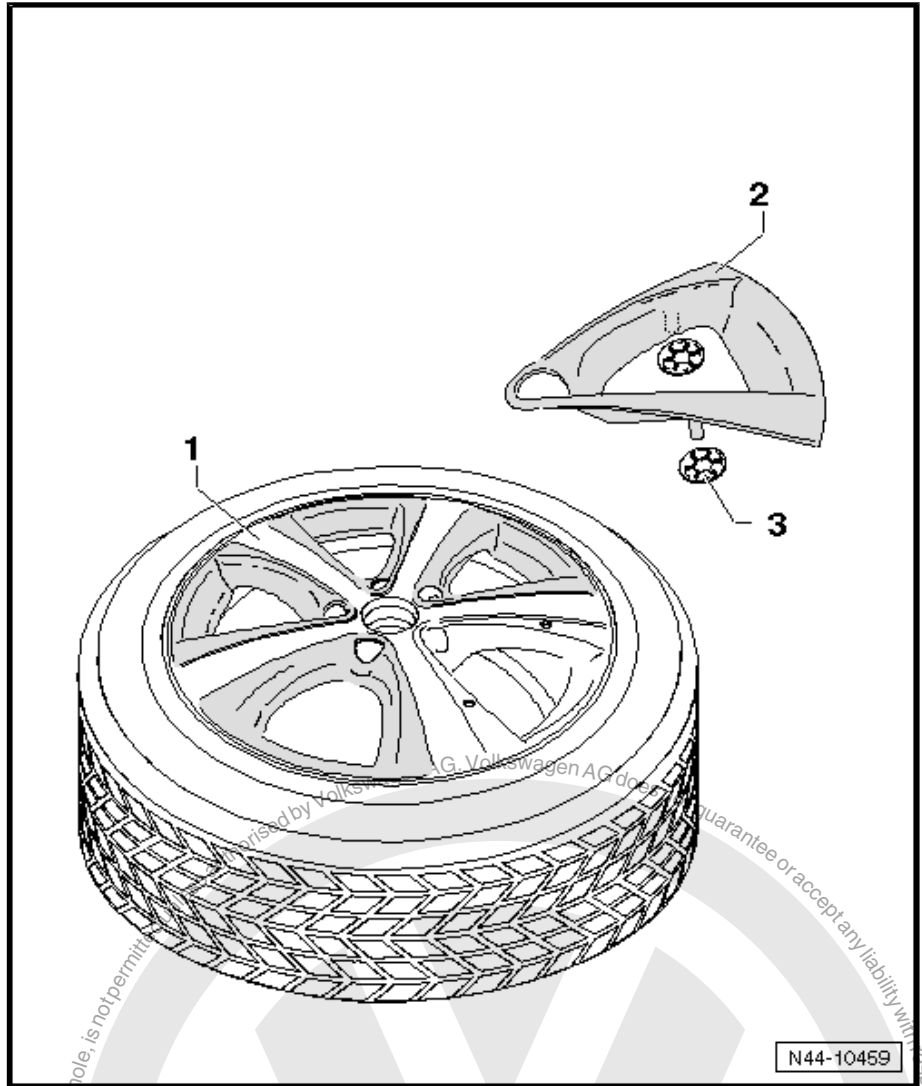

- Push trim element -2- forcefully into alloy wheel -1-.
- Secure trim element -2- on inner side of alloy wheel -3- with clamping washer.

Minimum curing period: 3 hours at a minimum room temperature of 15 °C.



WARNING

Alloy wheel must be rebalanced => page 33.




11.6.4 Removing trim element



Note

The trim element cannot be removed without causing damage to the element.

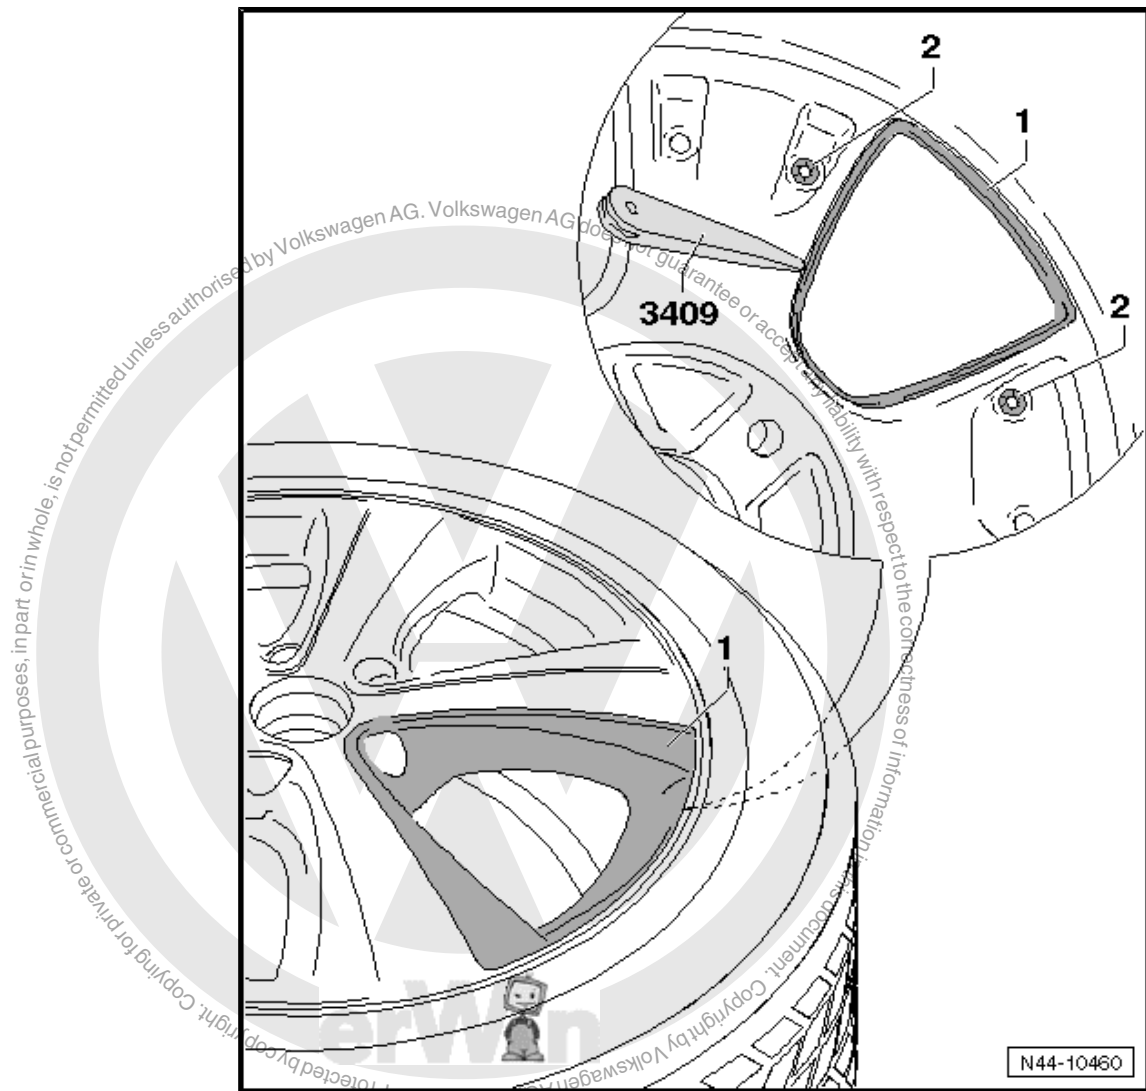

- Remove clamping washers -2- on inner side of alloy wheel.
- Heat outer side of trim element -1- with hot air blower -V.A.G 1416- .



Caution

Do not overheat tyres and alloy wheels.

- Release trim element -1- on inner side of alloy wheel using wedge -3409- .
- Grasp under a corner on the outside and pull trim element -1- forcefully off alloy wheel.



Note

- ◆ *Cut back adhesive PUR beads on alloy wheel.*
- ◆ *Residual material is used as a bonding base for the new trim element.*
- ◆ *The new trim element can be installed immediately ⇒ [page 60](#) .*

11.7 Care and maintenance of alloy wheel rims

Regular care is required to maintain the decorative appearance of alloy wheels over a long period of time.

In particular road salt and dust from brake abrasion must be thoroughly washed off every 2 weeks; otherwise the finish of the alloy wheel will suffer.

Cleaning agents

Suitable cleaning agents:

- ◆ Plain water or water with soft soap
- ◆ Water and essence of vinegar
- ◆ Alloy wheel cleansers without acids or strong solvents

Do not exceed the soaking time of the cleaning agent.

The shorter the recommended soaking time, the harsher and more aggressive the cleaning agent.

Damage to finish

If the finish is damaged, for example by stones, the damage must be repaired as quickly as possible ⇒ [page 63](#) .

Removing adhesive residue from glued balance weights on alloy rims

- ◆ Strong solvents and acids attack the finish on alloy wheels and the surface of the wheel becomes matt and milky. Therefore, these substances should not be used.
- ◆ To remove adhesive residue on alloy wheels, use alloy cleansers or a petrol-based cleanser. Do not exceed the soaking time of the cleaning agent.
- ◆ After cleaning or removing adhesive residue from wheels, rinse them with water.

11.8 Restoring alloy wheels



WARNING

- ◆ ***Repairing a damaged wheel using heat treatment such as welding or the addition or removal of material is absolutely forbidden.***
- ◆ ***Damaged or deformed wheel rims or wheel rims with cracked or deformed wheel bolt holes may not be repaired.***
- ◆ ***Restoration may only be undertaken using approved and genuine paint materials.***
- ◆ ***The manufacturer's guarantee no longer applies once a wheel rim has been restored.***



Wheel rims with cracks along the edges may not be repaired and must be replaced immediately.

Remachining, heat treatment and welding of all types is not permitted.

Material reforming is not permissible.

Before restoring, the radial runout and lateral runout must not exceed the manufacturer's tolerance of 0.8 mm.

Only cast alloy wheel rims may be filled using a filler putty. These wheels have the material identification AISi xx stamped in the inner side.

Forged wheels may not be painted.

The restoration is limited to the painted surfaces.

Bright machined wheels, which only have a clear coating, may not be repaired.

Only surface damage on the viewed side (design surface) of the wheel may be restored.

Restoring a damaged surface depth of 1 mm must not be exceeded.

Only up to 50 mm may be removed/ filler filled on the outer boss.





11.9 The valve

- 1 - Valve body
- 2 - Valve core
- 3 - Valve cap

1. Valve body

The rubber valve for tubeless tyres is designed to create an air-tight seal in the hole in the rim. The elastic material of the rubber body presses tightly into the hole in the rim.

In the case of valves with a threaded metal base, a rubber seal is used to seal the rim. The lateral faces of the rim hole are sealing surfaces. They must therefore be free of rust and dirt and must not be damaged.

2. Valve core

The valve core has the most important job in the valve. It creates a seal and enables the regulation of the air pressure. The small flat seal on the valve core can function correctly only if it is free of foreign particles, dirt and moisture. The compressed air system must be free of water and oil!


3. Valve cap

A valve cap must always be screwed onto the valve. It prevents dirt from getting into the valve. Dirt which may be in the valve would reach the seal of the valve plate when the tyre is inflated and cause a leak.

The valve must be renewed every time a new tyre is fitted.

If the vehicle is driven without caps on the valves, there is the danger that dirt may get into the valve. This leads to a gradual loss of air which in turn can lead to the destruction of the tyre.

- ◆ Separation of carcass and rubber ⇒ [page 50](#)
- ◆ Wide, circumferential furrows near the bead ⇒ [page 50](#)
- ◆ Stripped tread or stripped protector ⇒ [page 51](#)

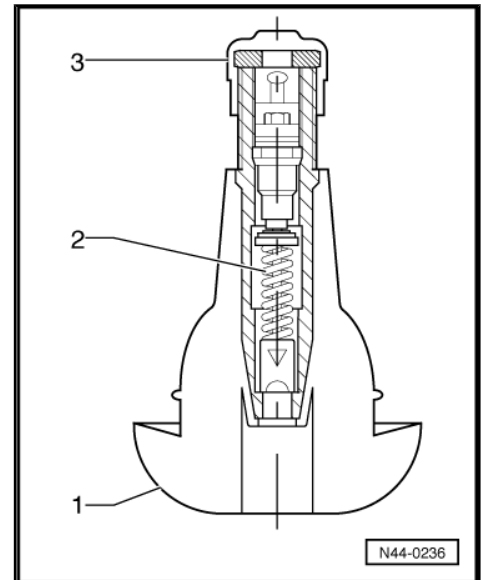

WARNING

The valve cap must be fitted tightly to ensure air-tight sealing.



12 Fitting and removing wheels

12.1 Changing wheels

Vehicles with front-wheel drive exhibit more tread wear on the front wheels due to the greater forces they have to transmit.

In order for all 4 wheels on the vehicle to have the same service life, we recommend rotating the front and rear wheels and tyres.

Ensure that uni-directional tyres are not reversed.

The longer the tyre runs at one position, the more it wears at certain points. Therefore it is recommended to rotate the wheels at short intervals, for example every 5,000 km.

Diagonal rotation is possible only with non-directional tyres. This method of wheel rotation is especially advantageous in the case of saw-tooth wear ⇒ [page 29](#) .

If saw-tooth wear has already progressed and the tread is worn to more than 50%, only slight improvements would be achieved and rotation is not recommended. The elasticity of the tread blocks declines and the saw-tooth wear does not progress.


12.2 Instructions for changing or fitting wheels



WARNING

Perform the checks and follow the instructions listed below. This is important to ensure that the wheel bolts and the wheels are properly secured.


- Check to ensure that contact surfaces -arrows- on brake disc are free of corrosion and dirt.
- Check to ensure that contact surface -arrow- on centring seat of brake disc are free of corrosion and dirt.

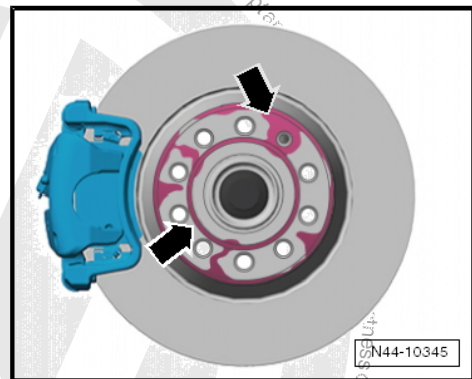



- Check to ensure that contact surface -arrow- on inner side of wheel (rim) and also centring seat of rim are free of corrosion and dirt.
- The concave seats * in the holes for the wheel bolts and the threads of the wheel bolts must also be free of corrosion and dirt, oil or grease.


* The concave seat is the curved surface of a section of a sphere cut by a plane.

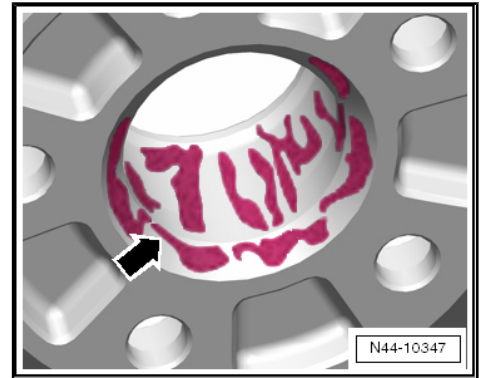

- Check whether the wheel bolts can be easily screwed in by hand. The thread of the wheel bolts must not come into contact with the bore in the brake disc -arrow-.

If the thread of the wheel bolt touches the hole -arrow-, turn the brake disc relative to the wheel hub accordingly.

Remove dirt and corrosion, oil or grease from the contact surfaces, threads in the wheel hub and/or wheel bolts as necessary.

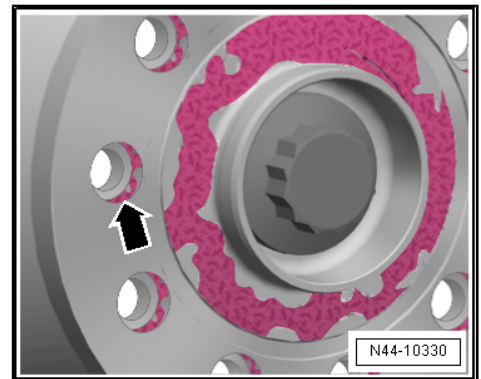


WARNING

Damaged, badly corroded or difficult to remove wheel bolts must be renewed.

Fitting wheels

- Preserve wheel centring seat ⇒ Running gear, axles, steering; Rep. gr. 44 ; Protecting wheel centring seat against corrosion .
- 1 - When fitting the wheel, screw in all wheel bolts uniformly by hand.
 - 2 - Tighten the wheel bolts in diagonal sequence to approx. 30 Nm.
 - 3 - Lower vehicle to the floor and tighten all wheel bolts diagonally to the specified torque using the torque wrench ⇒ Running gear, axles, steering; Rep. gr. 44 ; Specified torque for wheel bolts .

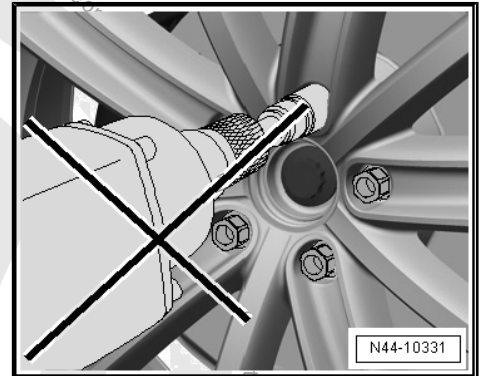

WARNING

Do not use an impact driver when screwing in the bolts!



12.3 Revised wheel bolts for Sharan from model year 2001

Revised wheel bolts were used from model year 2001 and thereafter. These have the same dimensions and torque settings as the previous wheel bolts.

1 - For vehicles through model year 2000

Polished black surface - part no. -701 601 139 B- .


Not permitted on vehicles from model year 2001 or later.

2 - Wheel bolt for vehicles from model year 2001 and later

Collar -arrow- is not fixed in place on the hexagon.

Coated silver-coloured surface - part no. -7M3 601 139 B- .

Not permitted on vehicles to model year 2000.

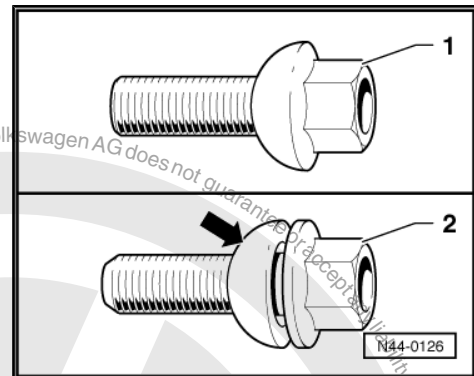

WARNING

- ◆ *The modified wheel bolts are not permitted on vehicles produced to model year 2000.*
- ◆ *Wheel rims from vehicles produced to model year 2000 are not permitted on vehicles from model year 2001 or later.*

12.4 Notes on use of temporary spare wheels

Inform your customers about the following notes and, if appropriate, refer also to the user's manual of the vehicle as the need arises.


The following notes also apply to spare wheels, e.g. 7 J x 16 with 205/55 R 16 tyres, marked with a yellow sticker with the text „MAX 80 km/h“ or „MAX 50 mph“





Note

- ◆ Depending on vehicle equipment, e.g. Passat cars with alloy wheels and 225 mm tyres have a spare wheel with the sticker described above instead of a temporary spare wheel.
- ◆ The spare wheel or temporary spare wheel is intended only for temporary use over short distances. Therefore, it must be replaced by a normal wheel as quickly as possible.
- ◆ After the temporary or spare wheel has been fitted, the tyre pressure must be checked as soon as possible. For the correct tyre pressure, please refer to the tyre pressure in the relevant vehicle or the relevant manual: Maintenance manual.
- ◆ Always observe the speed warning on the temporary spare wheel („MAX 80 km/h“ or „MAX 50 mph“).
- ◆ Full acceleration, hard braking and driving fast through curves should be avoided.
- ◆ Never drive with more than one spare wheel or temporary spare wheel.
- ◆ The use of snow chains on the temporary spare wheel is not permitted for technical reasons.
- ◆ If it is necessary to travel with snow chains, the temporary spare wheel must be fitted on the rear axle even if the front tyre has been damaged. The now available rear wheel must then be fitted in place of the defective front wheel.

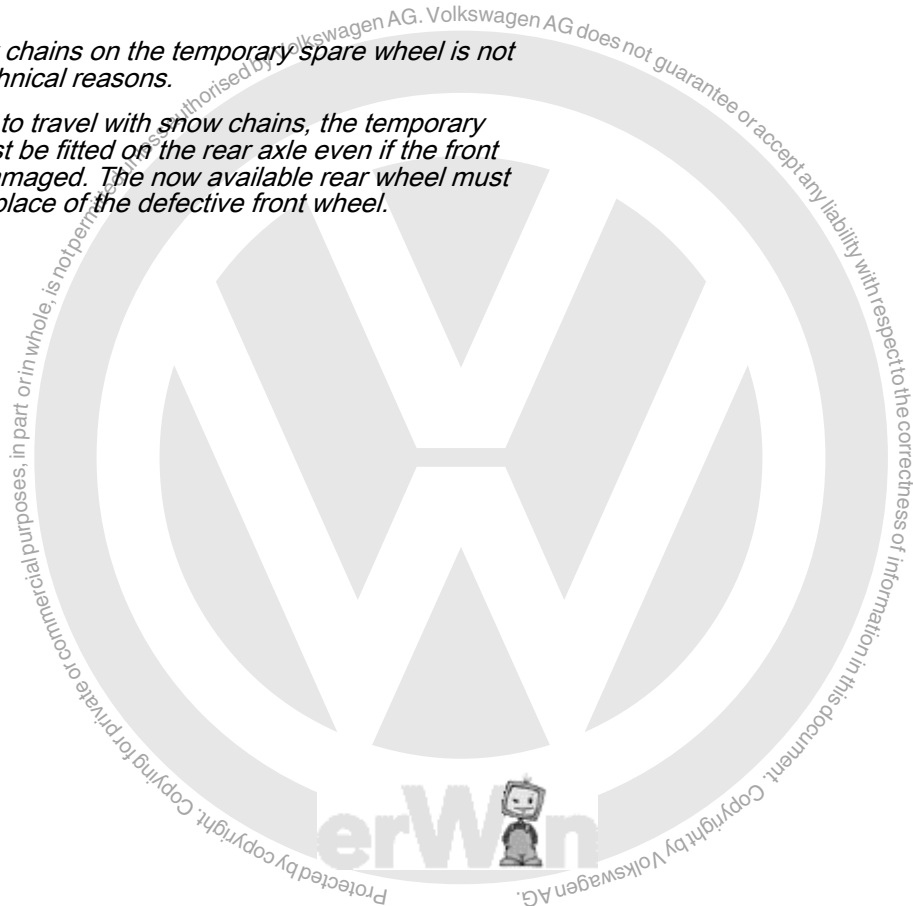



13 Lupo 3L, Lupo FSI, Lupo GTI from model year 1999

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of genuine Volkswagen spare parts only. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to disc-type wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

13.1 Lupo 3L, type 6E model year 1999 to model year 2006

Attachment to parts certificate 1903/05

Type Approval No.: e1*98/14*0114*00 to e1*98/14*0114*10

Type Approval No.: e1*2001/116*0114*11 to e1*2001/116*0114*14

Overview

Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
1.2l 45 kW	Standard tyres	155/65 R 14 75S	4 J x 14 ⇒ page 71	35	Yes	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17
		155/65 R 14 75S	4 ¹ / ₂ J x 14 ⇒ page 71	38	Yes	



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
		155/65 R 14 75S	5 J x 14 ⇒ page 72	40	Yes	Tyre makes recommended by Volkswagen: ♦ Summer tyres ⇒ page 458 ♦ Winter tyres ⇒ page 488
	Modification	No changes are permissible apart from the standard wheel and tyre combinations!				
	Winter tyres	155/65 R 14 75Q/T	5 J x 14 ⇒ page 72	40	Yes	

Tyre pressures can be found on the inside of the fuel tank flap or in ⇒ Maintenance ; Booklet 13.1 .

13.2 Wheel allocation Lupo 3L, type 6E model year 1999 to model year 2006

Explanation of information on wheels ⇒ page 57

Torque specifications for wheel bolts ⇒ Running gear, axles, steering - Lupo 3 L, Lupo FSI, Lupo GTI; Rep. gr. 44 ; Torque specifications for wheel bolts


Pitch circle diameter 100 mm
Number of wheel bolt holes: 4

13.2.1 4 J x 14

	Caution
<i>Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 70 .</i>	

6E0 601 025 - Wheel and tyre combination ⇒ page 70

Size:	4 J x 14
Wheel offset in mm:	35
Wheel load in kg:	400

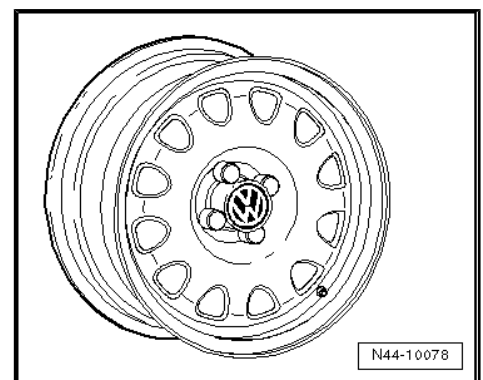


13.2.2 4 1/2 J x 14

	Caution
<i>Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 70 .</i>	



6E0 601 025 D - Wheel and tyre combination ⇒ page 70

Size:	4 ¹ / ₂ J x 14
Wheel offset in mm:	38
Wheel load in kg:	400

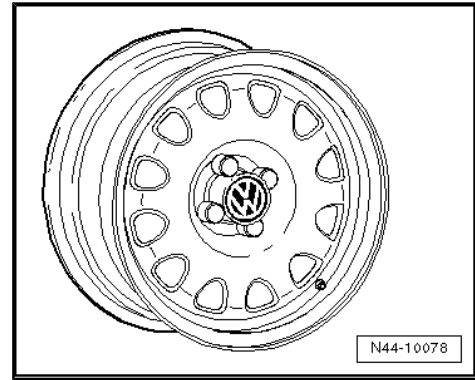

13.2.3 5 J x 14




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 70 .

6E0 601 027 A - Wheel and tyre combination ⇒ page 71

Size:	5 J x 14
Wheel offset in mm:	40
Wheel load in kg:	420

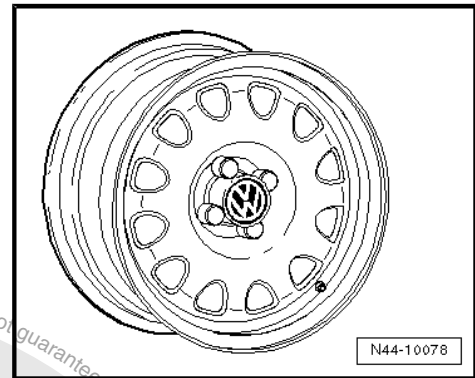

13.3 Lupo FSI, type 6E model year 2001 to model year 2006

Attachment to parts certificate 1903/05

Type Approval No.: e1*98/14*0114*05 to e1*98/14*0114*10

Type Approval No.: e1*2001/116*0114*11 to e1*2001/116*0114*13

Overview

Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
1.4l 77 kW	Standard tyres	175/60 R 14 79H	5 J x 14 ⇒ page 73	38	Yes* ⇒ page 72	* Snow chains: Only the listed snow chains are approved! Article No. ⇒ page 73
	Modification	185/55 R 14 80H/V	6 J x 14 ⇒ page 74	43	No	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
	Winter tyres	155/65 R 14 75S	5 J x 14 ⇒ page 73	40	Yes	Tyre makes recommended by Volkswagen: ♦ Summer tyres ⇒ page 458 ♦ Winter tyres ⇒ page 488

Tyre pressures can be found on the inside of the fuel tank flap or in ⇒ Maintenance ; Booklet 13.1 .

The snow chains listed below are permitted only in conjunction with the wheel and tyre combinations listed next to them!

Chain manufacturer Article No.	Accessories part No.	Tyre size	Wheel	Part No.
Rud 4414437	000 091 386 A	175/60 R 14 79H	5 J x 14 ET 38	6E0 601 025 F
Ottinger 100 458	Z 091 300			

13.4 Wheel allocation Lupo FSI, type 6E model year 2001 to model year 2006

Explanation of information on wheels ⇒ [page 57](#)

Torque specifications for wheel bolts ⇒ Running gear, axles, steering - Lupo 3 L, Lupo FSI, Lupo GTI; Rep.gr. 44 ; Torque specifications for wheel bolts

Pitch circle diameter

100 mm

Number of wheel bolt holes:

4

13.4.1 5 J x 14




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 72](#) .

6E0 601 025 F - Wheel and tyre combination ⇒ [page 72](#)


Size:	5 J x 14
Wheel offset in mm:	38
Wheel load in kg:	400

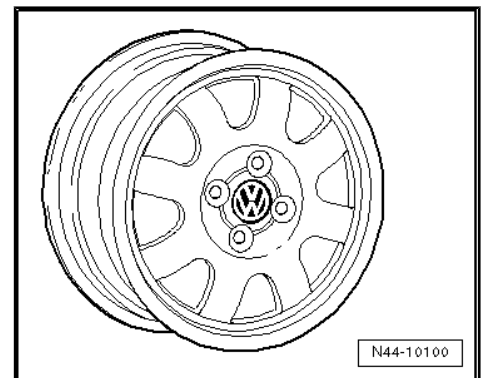



6E0 601 027 A - Wheel and tyre combination ⇒ page 73

Size:	5 J x 14
Wheel offset in mm:	40
Wheel load in kg:	420

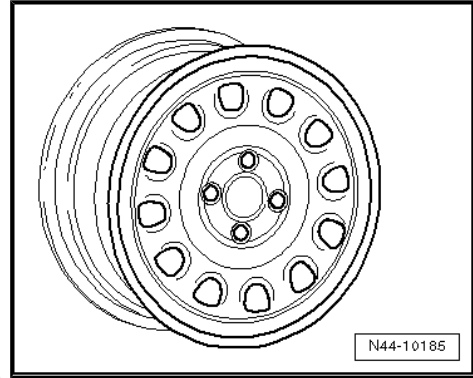

13.4.2 6 J x 14




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 72 .


1H0 601 027 A - Wheel and tyre combination ⇒ page 72

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	500

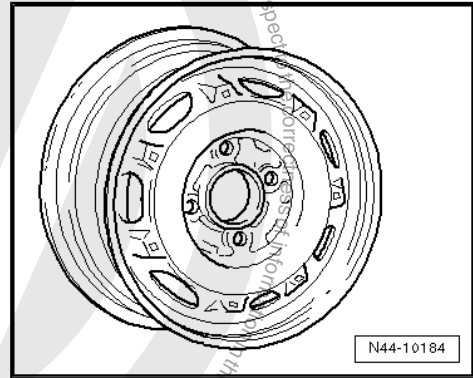


6X0 601 025 - Wheel and tyre combination ⇒ page 72

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	415

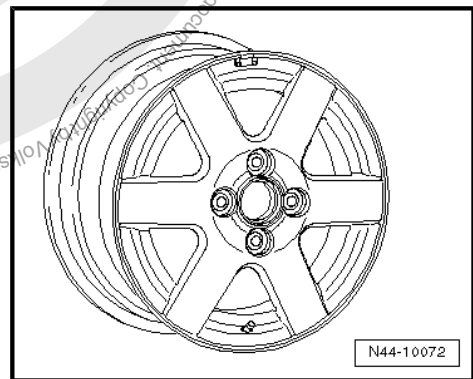

6X0 601 025 A - Wheel and tyre combination ⇒ page 72


Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	425

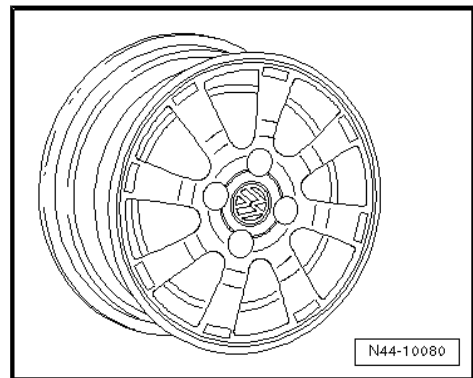




6X0 601 025 D - Wheel and tyre combination ⇒ page 72

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	475

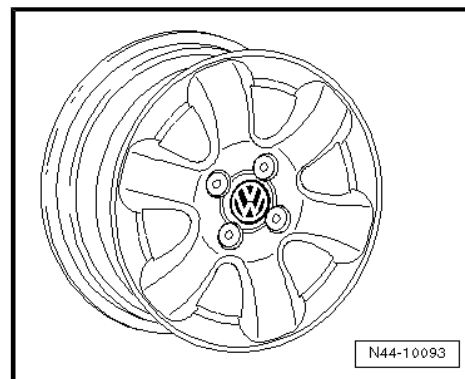

6N0 601 025 D - Wheel and tyre combination ⇒ page 72

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	425

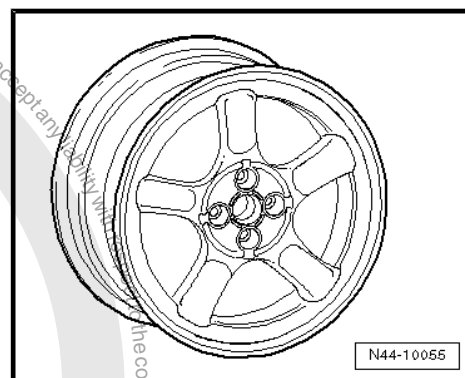

13.5 Lupo GTI, type 6ES model year 2001 to model year 2006

Attachment to parts certificate 1903/05

Type Approval No. e1*98/14*0147*00 to e1*98/14*0147*03

Type Approval No.: e1*2001/116*0147*04 to e1*2001/116*0147*08

Overview

Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
1.6l 92 kW	Standard tyres	185/55 R 14 80V	6 J x 14 ⇒ page 76	43	Yes	Snow chains: Only the listed snow chains are approved! Article No. ⇒ page 76
	Standard tyres from model year 2003	205/45 R 15 81V	6 ¹ / ₂ J x 15 ⇒ page 77	43	No	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17
	Modification	205/45 R 15 81V	6 ¹ / ₂ J x 15 ⇒ page 77	43	No	Tyre makes recommended by Volkswagen:
	Winter tyres	185/55 R 14 80T	6 J x 14 ⇒ page 76	43	Yes	◆ Summer tyres ⇒ page 458 ◆ Winter tyres ⇒ page 488

Tyre pressures can be found on the inside of the fuel tank flap or in ⇒ Maintenance ; Booklet 13.1 .



The snow chains listed below are permitted only in conjunction with the wheel and tyre combinations listed next to them!

Chain manufacturer Article No.	Accessories part No.	Tyre size	Wheel	Part No.
Rud 4414437	000 091 386 A	185/55 R 14 80V/T	6 J x 14 ET 43	6X0 601 027 A
Ottinger 100 458	Z 091 300			

13.6 Wheel allocation Lupo GTI, type 6ES model year 2001 to model year 2006

Explanation of information on wheels ⇒ [page 57](#)

Torque specifications for wheel bolts ⇒ Running gear, axles, steering - Lupo 3 L, Lupo FSI, Lupo GTI; Rep. gr. 44 ; Torque specifications for wheel bolts

Pitch circle diameter 100 mm
Number of wheel bolt holes: 4

13.6.1 6 J x 14



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 75](#).



1H0 601 027 A - Wheel and tyre combination ⇒ [page 75](#)

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	500

Winter wheel

6X0 601 027 A - Wheel and tyre combination ⇒ [page 75](#)

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	475

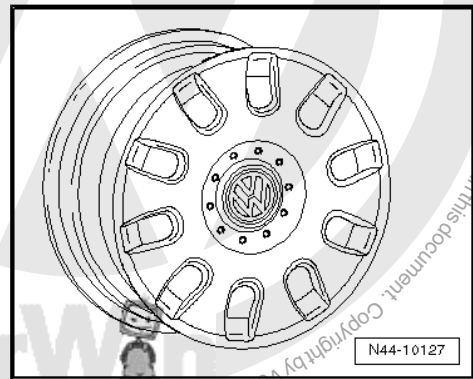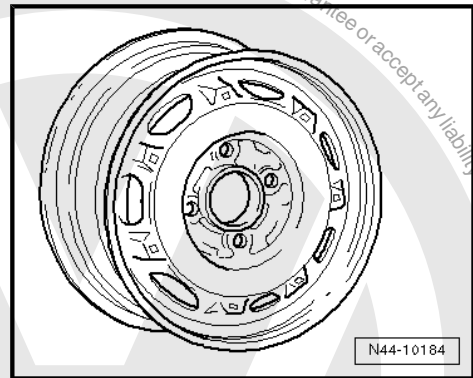



13.6.2 6¹/₂ J x 15




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 75](#).


6E0 601 025 A - Wheel and tyre combination ⇒ [page 75](#)

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	43
Wheel load in kg:	400

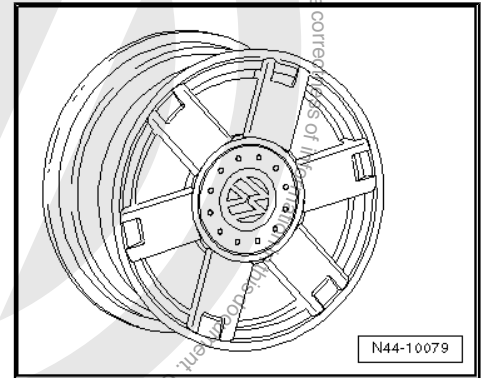

6E0 601 025 E - Wheel and tyre combination ⇒ [page 75](#)

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	43
Wheel load in kg:	400

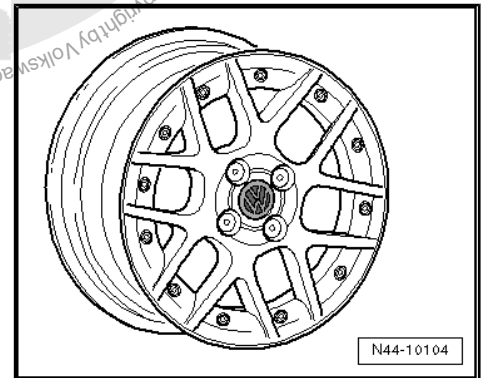



14 Lupo model year 1999 to model year 2005

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of genuine Volkswagen spare parts only. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to disc-type wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

14.1 Lupo, type 6X model year 1999 to model year 2005

Attachment to parts certificate 1903/05

Type Approval No.: e1*97/27*0085*00 to e1*97/27*0085*02

Type Approval No.: e1*98/14*0085*03 to e1*98/14*0085*13

Type Approval No.: e1*2001/116*0085*14 to e1*2001/116*0085*17

Overview

Model engine output	Tyres	Tyre size	Wheel	Offset in mm	Snow chains	Remarks
37 kW , 44 kW petrol engine without air conditioning	Standard tyres	155/70 R 13 75S	4 ¹ / ₂ J x 13 ≧ page 80	35	Yes	Tyres 185/55 R 14 or 195/45 R 15 are permitted only on vehicles with PAS
	Modification	175/65 R 13 80S/T	5 ¹ / ₂ J x 13 ≧ page 81	43	Yes	



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
		185/55 R 14 79T	6 J x 14 ⇒ page 82	43	Yes	
		185/55 R 14 79H	6 J x 14 ⇒ page 82	43	Yes	
		195/45 R 15 78H/V	6 J x 15 ⇒ page 84	43/4 5	Yes	
	Winter tyres	155/70 R 13 75Q	4 ¹ / ₂ J x 13 ⇒ page 80	35	Yes	
37 kW with air conditioning; 44 kW petrol and diesel engines; 55 kW petrol engines with automatic gearboxes	Standard tyres	175/65 R 13 80S	5 ¹ / ₂ J x 13 ⇒ page 81	43	Yes	General information on ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17 Tyre makes recommended by Volkswagen: ◆ Summer tyres ⇒ page 458 ◆ All-season tyres ⇒ page 481 ◆ Winter tyres ⇒ page 489
	Modification	175/65 R 13 80T	5 ¹ / ₂ J x 13 ⇒ page 81	43	Yes	
		185/55 R 14 79T	6 J x 14 ⇒ page 82	43	Yes	
		185/55 R 14 79H	6 J x 14 ⇒ page 82	43	Yes	
		195/45 R 15 78H	6 J x 15 ⇒ page 84	43/4 5	No	
	Winter tyres	175/65 R 13 80Q	5 ¹ / ₂ J x 13 ⇒ page 81	43	Yes	
	55 kW petrol engine with manual gearbox	Standard tyres	175/65 R 13 80T	5 ¹ / ₂ J x 13 ⇒ page 81	43	
Modification		185/55 R 14 79T	6 J x 14 ⇒ page 82	43	Yes	
		185/55 R 14 79H	6 J x 14 ⇒ page 82	43	Yes	
		195/45 R 15 78H	6 J x 15 ⇒ page 84	43/4 5	No	
Winter tyres		175/65 R 13 80Q	5 ¹ / ₂ J x 13 ⇒ page 81	43	Yes	
55 kW TDI;	Standard tyres	185/55 R 14 79/80H	6 J x 14 ⇒ page 82	43	Yes	Snow chains:



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
74 kW 16V	Modification	195/45 R 15 78H/V	6 J x 15 ≧ page 84	43/4 5	No	Only the snow chains listed are permitted! Article No. ⇒ page 80
	Winter tyres	185/55 R 14 79T	6 J x 14 ≧ page 82	43	Yes	

Tyre pressures can be found on the inside of the fuel tank flap or in ⇒ Maintenance ; Booklet 13.1 .

Snow chains approved for Lupo 55 kW TDI and 74 kW 16 V

The snow chains listed below are permitted only in conjunction with the wheel and tyre combinations listed next to them!

Chain manufacturer Article No.	Accessories part No.	Tyre size	Wheel	Part No.
Rud 4414437	000 091 386 A	185/55 R 14 79/80H/T	6 J x 14 ET 43	1H0 601 027 A
Ottinger 100 458	Z 091 300			

14.2 Wheel allocation Lupo, type 6X model year 1999 to model year 2005

Explanation of information on wheels ⇒ [page 57](#)

Wheel bolt torque settings ⇒ Running gear, axles, steering; Rep. gr. 44 ; Wheel bolt torque settings

Pitch circle diameter 100 mm

Number of wheel bolt holes: 4

14.2.1 4¹/₂ J x 13




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 78](#) .

For 37 kW and 44 kW petrol engines without air conditioning

6N0 601 025 E - Wheel and tyre combination ⇒ [page 78](#)


Size:	4 ¹ / ₂ J x 13
Wheel offset in mm:	35
Wheel load in kg:	390

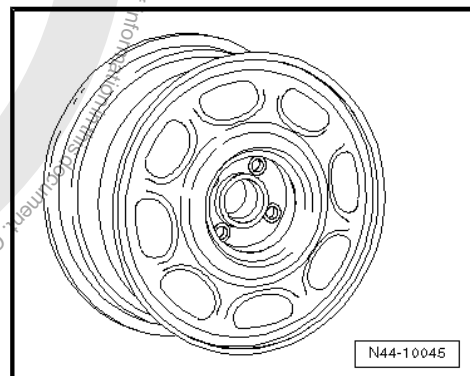



6N0 601 027 C - Wheel and tyre combination ⇒ page 78

Size:	4 ¹ / ₂ J x 13
Wheel offset in mm:	35
Wheel load in kg:	425

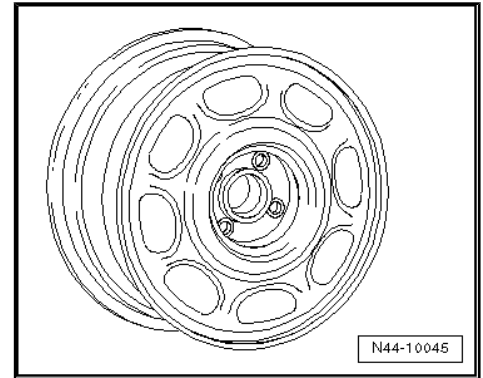

14.2.2 5¹/₂ J x 13


Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 78.

For all 37 kW, 44 kW and 55 kW petrol and 44 kW diesel engines


6N0 601 025 A - Wheel and tyre combination ⇒ page 78

Size:	5 ¹ / ₂ J x 13
Wheel offset in mm:	43
Wheel load in kg:	415

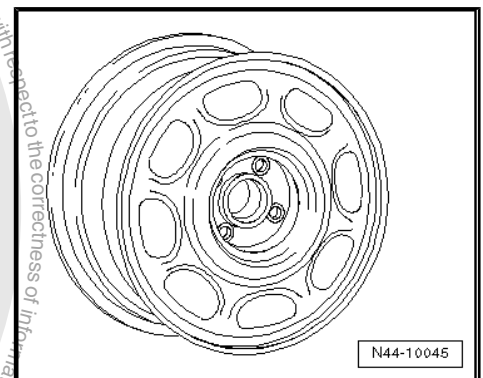

6N0 601 027 D - Wheel and tyre combination ⇒ page 78


Size:	5 ¹ / ₂ J x 13
Wheel offset in mm:	43
Wheel load in kg:	415

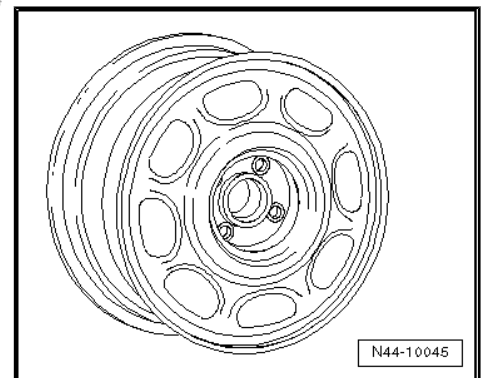



6N0 601 025 C - Wheel and tyre combination ⇒ page 78

Size:	5 ¹ / ₂ J x 13
Wheel offset in mm:	43
Wheel load in kg:	425

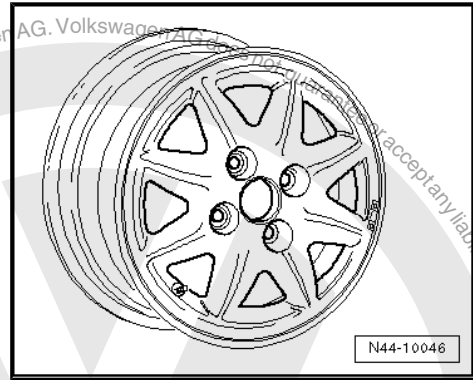

14.2.3 6 J x 14




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 78 .

For all vehicles with power steering


6X0 601 025 - Wheel and tyre combination ⇒ page 79

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	415

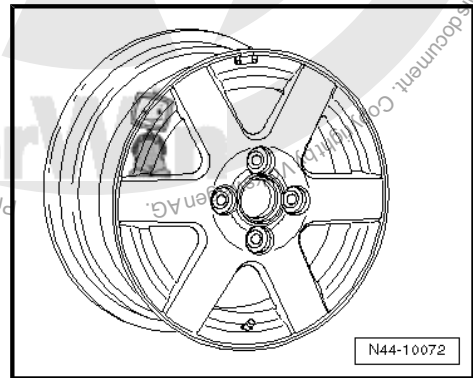

6N0 601 025 D - Wheel and tyre combination ⇒ page 79


Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	425

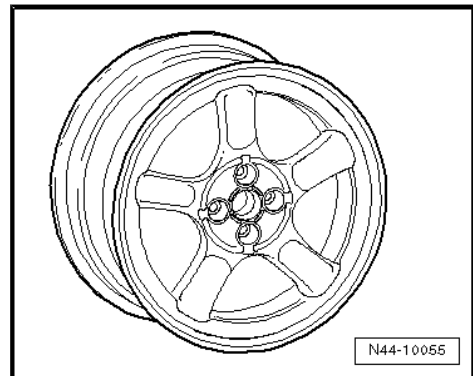




1H0 601 027 A - Wheel and tyre combination ⇒ page 79

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	500

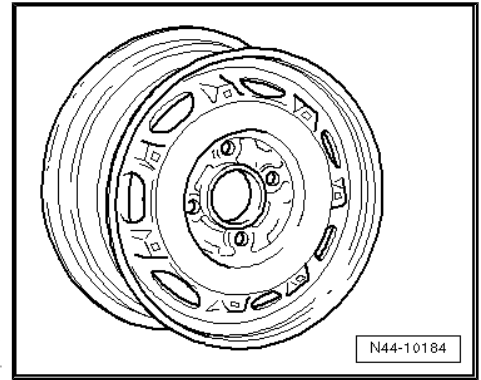


6X0 601 025 A - Wheel and tyre combination ⇒ page 79

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	425

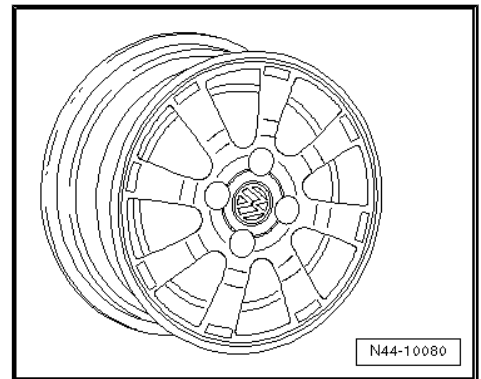


6X0 601 025 D - Wheel and tyre combination ⇒ page 79

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	475

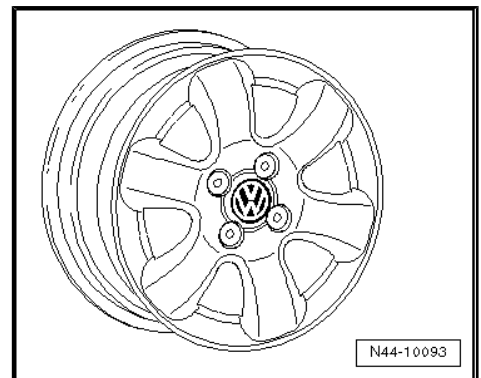

6X0 601 027 A - Wheel and tyre combination ⇒ page 79


Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	475

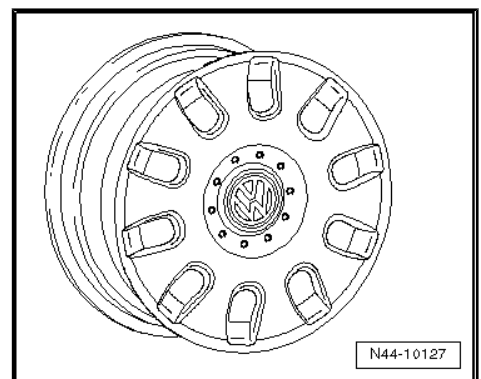




6X0 601 025 F - Wheel and tyre combination ⇒ page 79

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	420

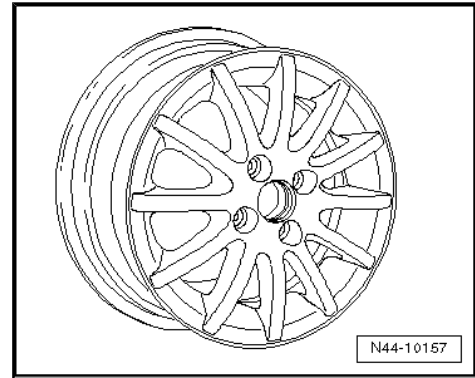

6X0 601 025 G - Wheel and tyre combination ⇒ page 79

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	475

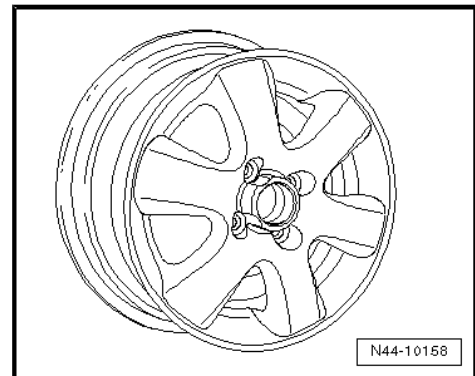

14.2.4 6 J x 15




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 78 .

For all vehicles with power steering

1H0 601 025 AD - Wheel and tyre combination ⇒ page 79


Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	460

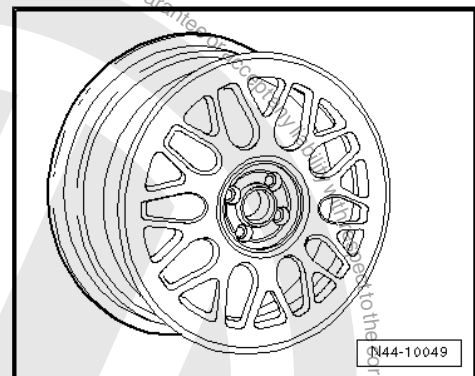




6N0 601 025 H - Wheel and tyre combination ⇒ page 79

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	420

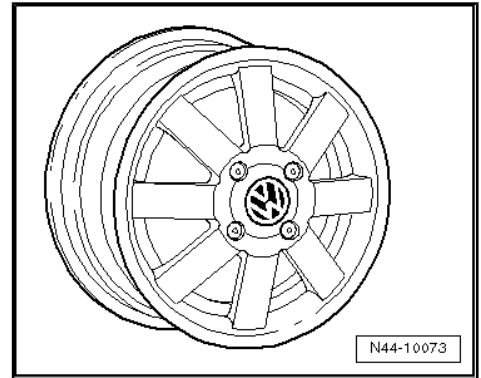


6X0 601 025 C - Wheel and tyre combination ⇒ page 79

Size:	6 J x 15
Wheel offset in mm:	43
Wheel load in kg:	475

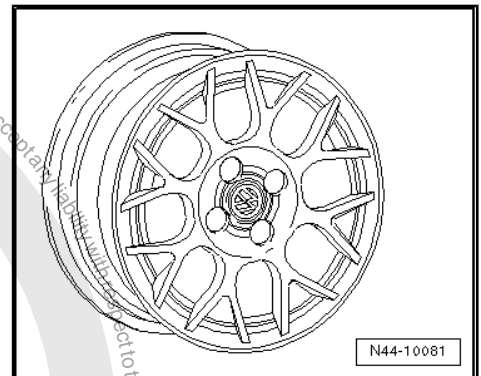


6N0 601 025 J - Wheel and tyre combination ⇒ page 79

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	425

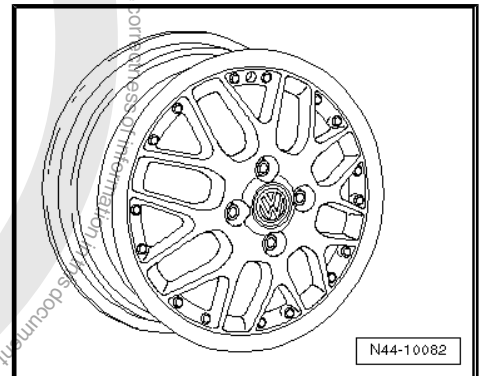

6X0 601 025 E - Wheel and tyre combination ⇒ page 79

Size:	6 J x 15
Wheel offset in mm:	43
Wheel load in kg:	475

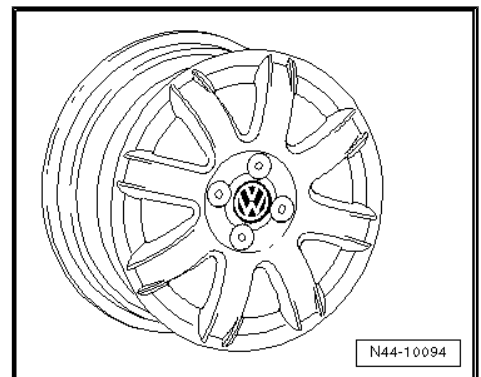



15 Polo model year 1995 to model year 2001

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of genuine Volkswagen spare parts only. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to disc-type wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

15.1 Polo, type 6N up to and including 07.95

Appendix 2 to Parts Certificate 1461/02

General type approval No. G 774

Overview

Model engine output	Tyres	Tyre size	Wheel	Offset in mm	Snow chains	Remarks
33, 37, 40, 44 kW with manual gearbox without air conditioning	Standard tyres	155/70 R 13 75S/T	4 ¹ / ₂ J x 13 ≧ page 87	35	Yes	If the speed rating „S“ does not already appear in the vehicle documentation, it must be entered.
		175/65 R 13 80S/T	5 ¹ / ₂ J x 13 ≧ page 88	43	Yes	



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
	Modification	No changes are permissible apart from the standard wheel and tyre combinations!				General information on: ♦ Winter tyres ⇒ page 14 ♦ Snow chains ⇒ page 17
	Winter tyres	155/70 R 13 75Q	4 1/2 J x 13 ⇒ page 87	35	Yes	
40, 44 kW with air conditioning and/or automatic gearbox,	Standard tyres	175/65 R 13 80S/T	5 1/2 J x 13 ⇒ page 88	43	Yes	♦ Summer tyres ⇒ page 459 ♦ All-season tyres ⇒ page 481 ♦ Winter tyres ⇒ page 489
55 kW petrol engine, 47 kW diesel engine	Modification	No changes are permissible apart from the standard wheel and tyre combinations!				
	Winter tyres	175/65 R 13 80Q	5 1/2 J x 13 ⇒ page 88	43	Yes	

Tyre pressures can be found on the inside of the fuel tank flap or in ⇒ Maintenance ; Booklet 28 .

15.2 Wheel allocation Polo, type 6N up to and including 07.95

Explanation of information on wheels ⇒ [page 57](#)

Tightening torques for wheel bolts ⇒ Running gear, axles, steering; Rep. gr. 40 ; Repairing front wheel suspension; II - Assembly overview - wheel bearing, suspension

Pitch circle diameter 100 mm

Number of wheel bolt holes: 4

15.2.1 4 1/2 J x 13



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 86](#) .




Copyright by Volkswagen AG.



For 33, 37, 40, 44 kW vehicles with manual gearbox, without air conditioning


6N0 601 025 E - Wheel and tyre combination ⇒ [page 86](#)

Size:	4 ¹ / ₂ J x 13
Wheel offset in mm:	35
Wheel load in kg:	390

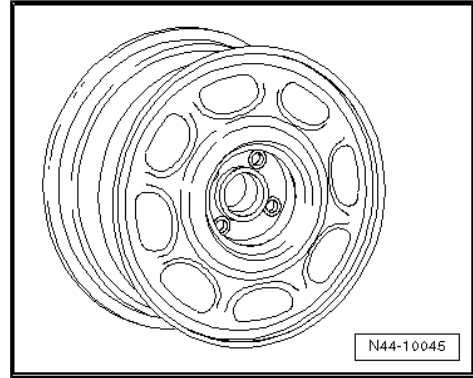

6N0 601 027 C - Wheel and tyre combination ⇒ [page 86](#)

Size:	4 ¹ / ₂ J x 13
Wheel offset in mm:	35
Wheel load in kg:	425

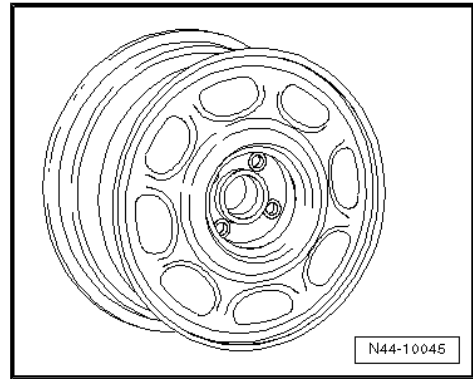

15.2.2 5¹/₂ J x 13




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 86](#)

For vehicles up to and including 55 kW petrol engines with and without PAS

6N0 601 025 A - allocation ⇒ [page 86](#)


Size:	5 ¹ / ₂ J x 13
Wheel offset in mm:	43
Wheel load in kg:	415

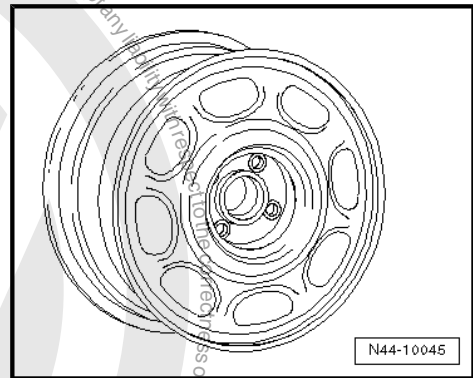



6N0 601.027 D - Allocation ⇒ [page 86](#)

Size:	5 ¹ / ₂ J x 13
Wheel offset in mm:	43
Wheel load in kg:	425

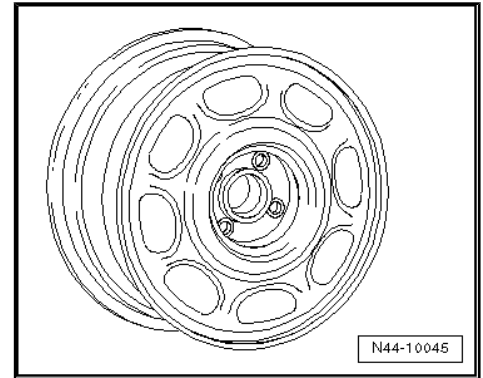

15.3 Polo, type 6N from 08.95 up to and including model year 1996

Appendix 2 to Parts Certificate 1461/02

General type approval No. G 774

Overview

Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
33, 37, 40, 44 kW with manual gear-box without air conditioning	Standard tyres	155/70 R 13 75S/T	4 ¹ / ₂ J x 13 ⇒ page 92	35	Yes	Tyres 185/55 R 14 or 195/45 R 15 are permitted only on vehicles with PAS General information on: ♦ Winter tyres ⇒ page 14 ♦ Snow chains ⇒ page 17 Tyre makes recommended by Volkswagen:
		175/65 R 13 80S/T	5 ¹ / ₂ J x 13 ⇒ page 92	43	Yes	
	Modification	185/55 R 14 78S	6 J x 14 ⇒ page 93	43	No	
		195/45 R 15 78S	6 J x 15 ⇒ page 94	45	No	
40, 44 kW with air conditioning and/or automatic gearbox	Winter tyres	155/70 R 13 75Q	4 ¹ / ₂ J x 13 ⇒ page 92	35	Yes	
	Standard tyres	175/65 R 13 80S/T	5 ¹ / ₂ J x 13 ⇒ page 92	43	Yes	♦ Summer tyres ⇒ page 459 ♦ All-season tyres ⇒ page 481 ♦ Winter tyres ⇒ page 489
		Modification	185/55 R 14 78S	6 J x 14 ⇒ page 93	43	No
			195/45 R 15 78S	6 J x 15 ⇒ page 94	45	No
55 kW petrol engine; 47 kW diesel engine	Winter tyres	175/65 R 13 80Q	5 ¹ / ₂ J x 13 ⇒ page 92	43	Yes	



Model engine output	Tyres	Tyre size	Wheel	Offset in mm	Snow chains	Remarks
74 kW 16V	Standard tyres	185/55 R 14 78H	6 J x 14 ⇒ page 93	43	Yes	
	Modification	195/45 R 15 78H	6 J x 15 ⇒ page 94	43/45	No	
	Winter tyres	185/55 R 14 78T	6 J x 14 ⇒ page 93	43	Yes	

Tyre pressures can be found on the inside of the fuel tank flap or in ⇒ Maintenance ; Booklet 28 .

15.4 Polo, type 6N from model year 1997 to model year 1999

Appendix 2 to Parts Certificate 1461/02

Type Approval No.: e1*96/79*0069*00 to e1*96/79*0069*05

Type Approval No.: e1*98/14*0069*06

Overview

Model engine output	Tyres	Tyre size	Wheel	Offset in mm	Snow chains	Remarks
33, 37, 40, 44 kW with manual gear-box without air conditioning Up to and including model year 1998	Standard tyres	155/70 R 13 75S	4 ¹ / ₂ J x 13 ⇒ page 92	35	Yes	The 155/70 R 13 75S tyres are no longer permitted on vehicles with 44 kW from model year 1999!
		175/65 R 13 80S	5 ¹ / ₂ J x 13 ⇒ page 92	43	Yes	Tyres 185/55 R 14 or 195/45 R 15 are permitted only on vehicles with PAS
	Modification	185/55 R 14 79S* ⇒ page 90	6 J x 14 ⇒ page 93	43	No	* Tyres with LI 78 are permitted on vehicles up to and including model year 1998!
		195/45 R 15 78S	6 J x 15 ⇒ page 94	43/45	No	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17
	Winter tyres	155/70 R 13 75Q	4 ¹ / ₂ J x 13 ⇒ page 92	35	Yes	Tyre makes recommended by Volkswagen:



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
40, 44 kW with air conditioning and/or automatic gearbox, 40, 44 kW from model year 1999; 55 kW petrol engine; 42, 44, 47 kW diesel engine	Standard tyres	175/65 R 13 80S	5 1/2 J x 13 ⇒ page 92	43	Yes	<ul style="list-style-type: none"> ◆ Summer tyres ⇒ page 459 ◆ All-season tyres ⇒ page 481 ◆ Winter tyres ⇒ page 489
	Modifica-tion	185/55 R 14 79S*	6 J x 14 ⇒ page 93	43	No	
		195/45 R 15 78S	6 J x 15 ⇒ page 94	43/ 45	No	
	Winter tyres	175/65 R 13 80Q	5 1/2 J x 13 ⇒ page 92	43	Yes	
74 kW 16V	Standard tyres	185/55 R 14 78H	6 J x 14 ⇒ page 93	43	Yes	
	Modifica-tion	195/45 R 15 78H	6 J x 15 ⇒ page 94	43/ 45	No	
	Winter tyres	185/55 R 14 78T	6 J x 14 ⇒ page 93	43	Yes	
88 kW 16V	Standard tyres	185/55 R 14 79H	6 J x 14 ⇒ page 93	43	Yes	
	Modifica-tion	195/45 R 15 78H	6 J x 15 ⇒ page 94	43/ 45	No	
	Winter tyres	185/55 R 14 79T	6 J x 14 ⇒ page 93	43	Yes	

Tyre pressures can be found on the inside of the fuel tank flap or in ⇒ Maintenance ; Booklet 28 .

15.5 Wheel allocation Polo, type 6N from 08.95 to model year 1999

Explanation of information on wheels ⇒ [page 57](#)

Tightening torques for wheel bolts ⇒ Running gear, axles, steering; Rep. gr. 40 ; Repairing front wheel suspension; II - Assembly overview - wheel bearing, suspension

Pitch circle diameter  100 mm
Number of wheel bolt holes:  4



15.5.1 4¹/₂ J x 13




Caution

Observe wheel and tyre allocation for the respective engines, which are listed in the overview tables ⇒ [page 89](#) (from 08.95 up to and including model year 1996) and ⇒ [page 90](#) (from model year 1997 to 1999).

For 33, 37, 40, 44 kW vehicles with manual gearbox, without air conditioning


6N0 601 025 E - allocation ⇒ [page 89](#) (08.95 - 1996) or ⇒ [page 90](#) (1997 - 1999)

Size:	4 ¹ / ₂ J x 13
Wheel offset in mm:	35
Wheel load in kg:	390

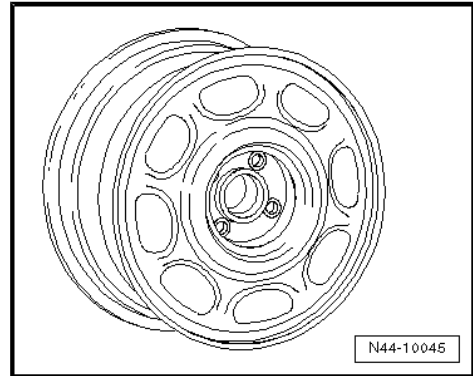

6N0 601 027 C - allocation ⇒ [page 89](#) (08.95 - 1996) or ⇒ [page 90](#) (1997 - 1999)

Size:	4 ¹ / ₂ J x 13
Wheel offset in mm:	35
Wheel load in kg:	425

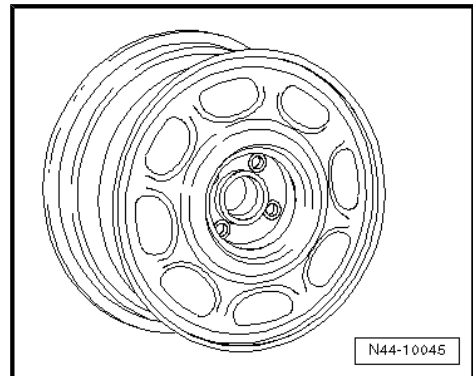

15.5.2 5¹/₂ J x 13



Caution


Observe wheel and tyre allocation for the respective engines, which are listed in the overview tables ⇒ [page 89](#) (from 08.95 up to and including model year 1996) and ⇒ [page 90](#) (from model year 1997 to 1999).



For vehicles up to and including 55 kW petrol engines with and without PAS


6N0 601 025 A - allocation ⇒ [page 89](#) (08.95 - 1996) or ⇒ [page 90](#) (1997 - 1999)

Size:	5 ¹ / ₂ J x 13
Wheel offset in mm:	43
Wheel load in kg:	415

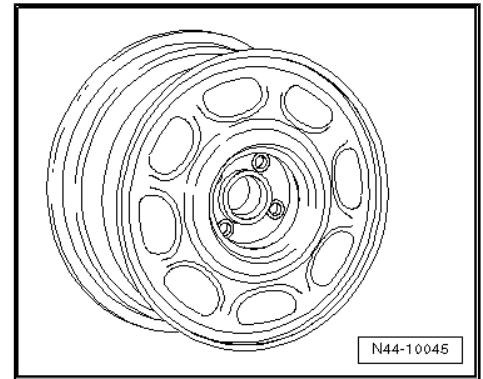

6N0 601 027 D - allocation ⇒ [page 89](#) (08.95 - 1996) or ⇒ [page 90](#) (1997 - 1999)

Size:	5 ¹ / ₂ J x 13
Wheel offset in mm:	43
Wheel load in kg:	425

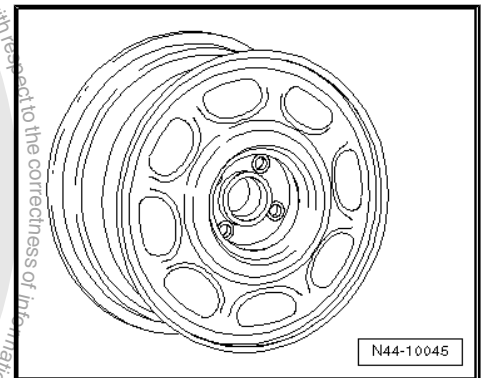

15.5.3 6 J x 14




Caution

Observe wheel and tyre allocation for the respective engines, which are listed in the overview tables ⇒ [page 89](#) (from 08.95 up to and including model year 1996) and ⇒ [page 90](#) (from model year 1997 to 1999).

For all vehicles with power steering

6N0 601 025 D - allocation ⇒ [page 89](#) (08.95 - 1996) or ⇒ [page 90](#) (1997 - 1999)


Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	415

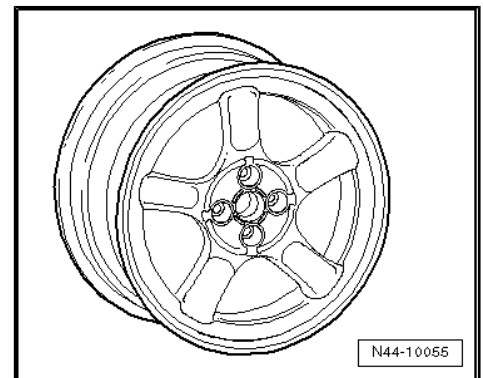




1H0 601 027 A - allocation ⇒ [page 89](#) (08.95 - 1996) or
⇒ [page 90](#) (1997 - 1999)

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	500

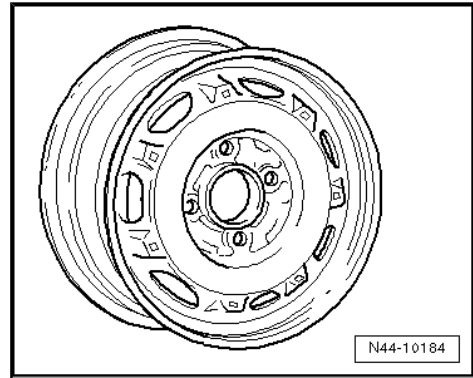


6X0 601 025 - allocation ⇒ [page 89](#) (08.95 - 1996) or ⇒ [page 90](#)
(1997 - 1999)

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	415

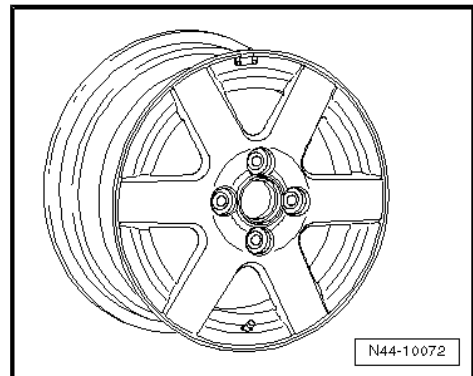

6X0 601 025 A - allocation ⇒ [page 89](#) (08.95 - 1996) or
⇒ [page 90](#) (1997 - 1999)

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	425

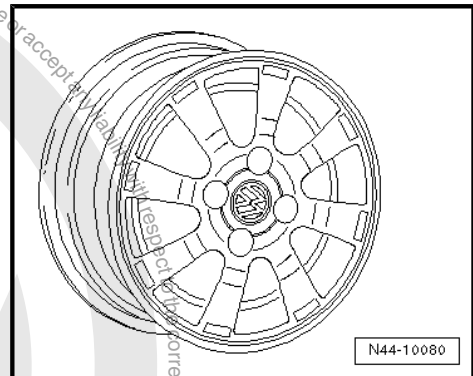

15.5.4 6 J x 15



Caution

Observe wheel and tyre allocation for the respective engines, which are listed in the overview tables ⇒ [page 89](#) (from 08.95 up to and including model year 1996) and ⇒ [page 90](#) (from model year 1997 to 1999).






For all vehicles with power steering


**1H0 601 025 AE - allocation ⇒ [page 89](#) (08.95 - 1996) or
 ⇒ [page 90](#) (1997 - 1999)**

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	480

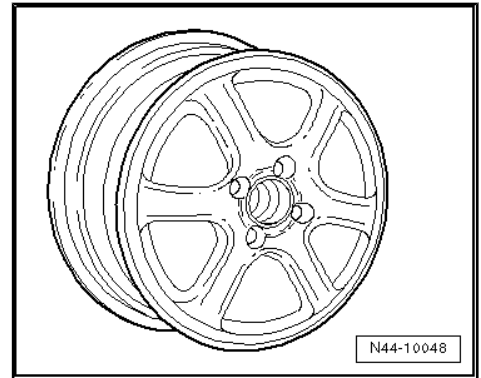


**6N0 601 025 H - allocation ⇒ [page 89](#) (08.95 - 1996) or
 ⇒ [page 90](#) (1997 - 1999)**

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	420

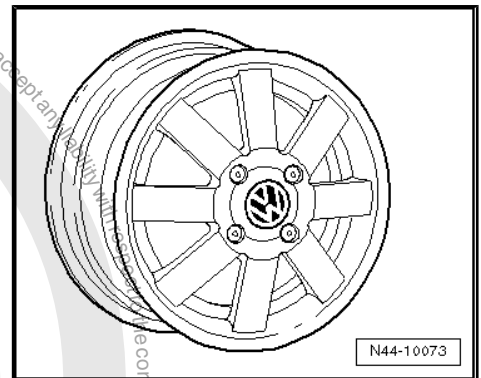


**6N0 601 025 J - allocation ⇒ [page 89](#) (08.95 - 1996) or
 ⇒ [page 90](#) (1997 - 1999)**

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	425

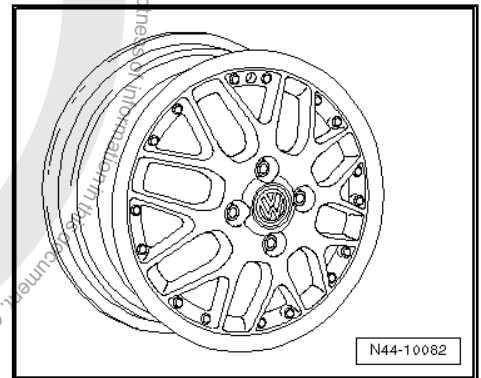

**1H0 601 025 AD - allocation ⇒ [page 89](#) (08.95 - 1996) or
 ⇒ [page 90](#) (1997 - 1999)**


Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	460

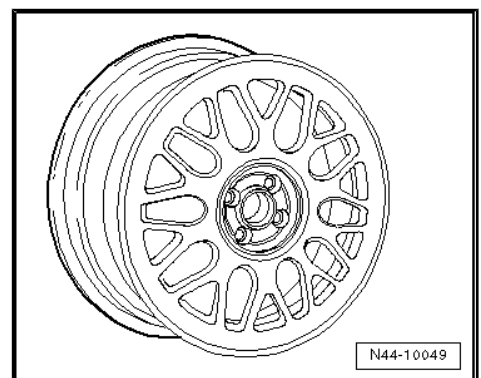



6X0 601 025 C - allocation ⇒ [page 90](#) (08.95 - 1996) or
⇒ [page 90](#) (1997 - 1999)

Size:	6 J x 15
Wheel offset in mm:	43
Wheel load in kg:	475

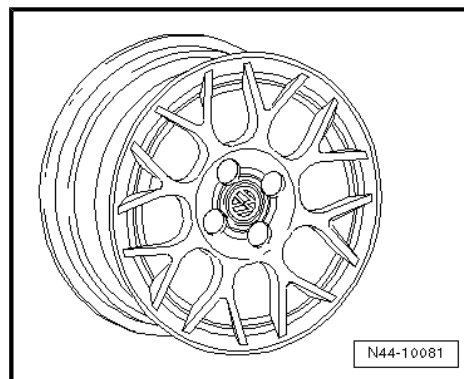

15.6 Polo, type 6N from model year 2000 to model year 2001

Appendix 2 to Parts Certificate 1461/02

Type Approval No. e1*98/14*0069*07 to e1*98/14*0069*11

Overview

Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
37 kW without air conditioning	Standard tyres	155/70 R 13 75S	4 1/2 J x 13 ⇒ page 98	35	Yes	Tyres 185/55 R 14 or 195/45 R 15 are permitted only on vehicles with PAS
	Modification	175/65 R 13 80S	5 1/2 J x 13 ⇒ page 98	43	Yes	
		185/55 R 14 80H* ⇒ page 96	6 J x 14 ⇒ page 99	43	No	
		195/45 R 15 78H	6 J x 15 ⇒ page 100	43/45	No	
	Winter tyres	155/70 R 13 75Q	4 1/2 J x 13 ⇒ page 98	35	Yes	
37 kW with air conditioning; 40, 44 kW petrol engine; 42, 44, 47 kW diesel; 55 kW petrol engine with 13" brakes, brake disc diameter 239 mm with automatic gearbox	Standard tyres	175/65 R 13 80S	5 1/2 J x 13 ⇒ page 98	43	Yes	* Tyres with LI 79 are permitted on vehicles from model year 2001!
	Modification	185/55 R 14 80H* ⇒ page 96	6 J x 14 ⇒ page 99	43	No	
			195/45 R 15 78H	6 J x 15 ⇒ page 100	43/45	No



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
	Winter tyres	175/65 R 13 80Q	5 1/2 J x 13 ⇒ page 98	43	Yes	Tyre makes recommended by Volkswagen: ◆ Summer tyres ⇒ page 459 ◆ All-season tyres ⇒ page 481 ◆ Winter tyres ⇒ page 489
55 kW petrol engine with 13" brakes, brake disc diameter 239 mm with manual gearbox	Standard tyres	175/65 R 13 80T	5 1/2 J x 13 ⇒ page 98	43	Yes	
	Modification	185/55 R 14 80H* ⇒ page 96	6 J x 14 ⇒ page 99	43	No	
		195/45 R 15 78H	6 J x 15 ⇒ page 100	43/45	No	
	Winter tyres	175/65 R 13 80Q	5 1/2 J x 13 ⇒ page 98	43	Yes	
55 kW petrol engine with 14" brakes, brake disc diameter 256 mm; 55 kW TDI; 74 kW 16V	Standard tyres	185/55 R 14 80H* ⇒ page 96	6 J x 14 ⇒ page 99	43	Yes	
	Modification	195/45 R 15 78H	6 J x 15 ⇒ page 100	43/45	No	
	Winter tyres	185/55 R 14 80T* ⇒ page 96	6 J x 14 ⇒ page 99	43	Yes	
92 kW 16V	Standard tyres	185/55 R 14 80V* ⇒ page 96	6 J x 14 ⇒ page 99	43	Yes	
	Modification	195/45 R 15 78V	6 J x 15 ⇒ page 100	43/45	No	
	Winter tyres	185/55 R 14 80T* ⇒ page 96	6 J x 14 ⇒ page 99	43	Yes	

Tyre pressures can be found on the inside of the fuel tank flap or in ⇒ Maintenance ; Booklet 28 .

15.7 Wheel allocation Polo, type 6N from model year 2000 to model year 2001

Explanation of information on wheels ⇒ [page 57](#)

Tightening torques for wheel bolts ⇒ Running gear, axles, steering; Rep. gr. 40 ; Repairing front wheel suspension; II - Assembly overview - wheel bearing, suspension

Pitch circle diameter

100 mm



Number of wheel bolt holes: 4

15.7.1 4¹/₂ J x 13




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 96](#).

For 33, 37, 40, 44 kW vehicles with manual gearbox, without air conditioning


6N0 601 025 E - allocation ⇒ [page 96](#)

Size:	4 ¹ / ₂ J x 13
Wheel offset in mm:	35
Wheel load in kg:	390

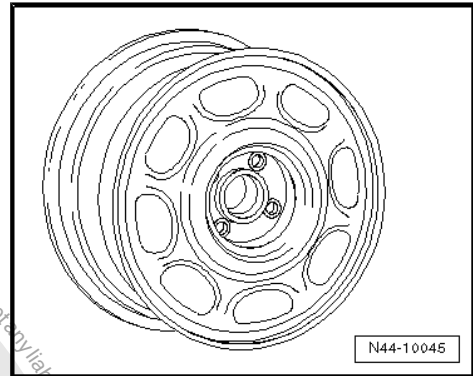

6N0 601 027 C - allocation ⇒ [page 96](#)

Size:	4 ¹ / ₂ J x 13
Wheel offset in mm:	35
Wheel load in kg:	425

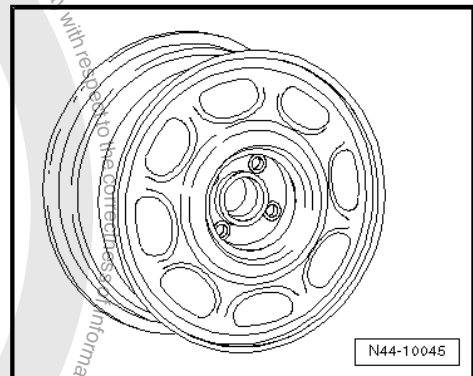

15.7.2 5¹/₂ J x 13



Caution


Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 96](#).



For vehicles up to and including 55 kW petrol engine without ABS
 with 13" brakes with and without PAS


6N0 601 025 A - allocation ⇒ [page 96](#)

Size:	5 ¹ / ₂ J x 13
Wheel offset in mm:	43
Wheel load in kg:	415

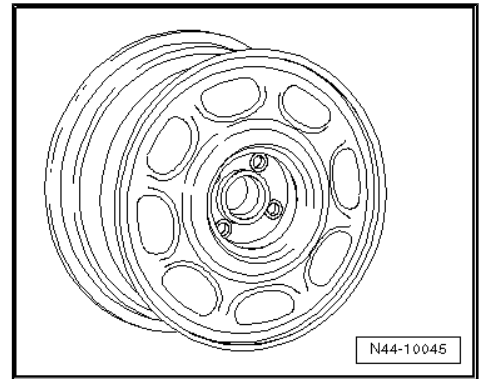

6N0 601.027 D - Allocation ⇒ [page 96](#)

Size:	5 ¹ / ₂ J x 13
Wheel offset in mm:	43
Wheel load in kg:	425

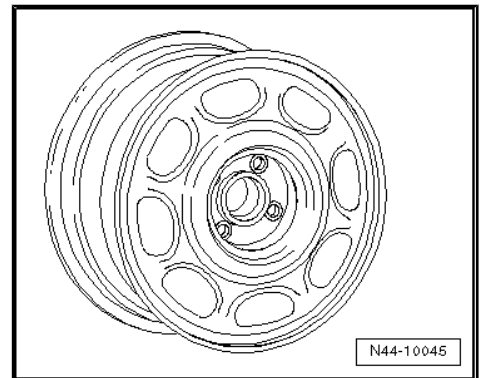

15.7.3 6 J x 14




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 96](#).

For vehicles with maximum permitted axle load of 830 kg

6X0 601 025 - allocation ⇒ [page 96](#)

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	415

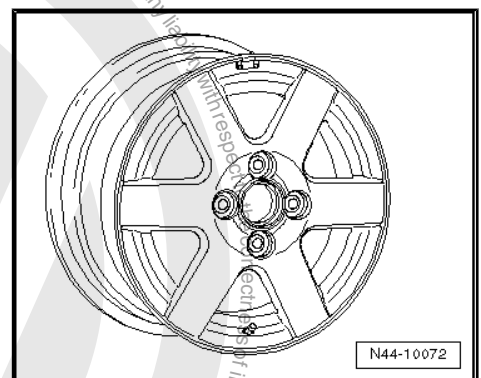




6N0 601.025 D - Allocation ⇒ page 96

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	415


For vehicles with maximum permitted axle load of 850 kg

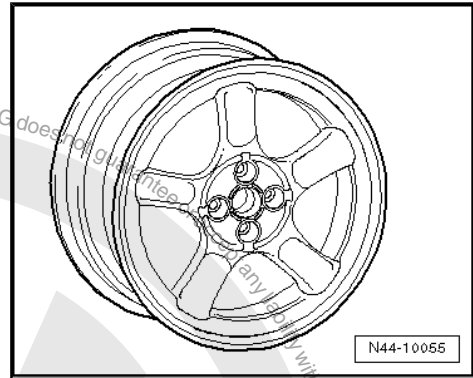

6X0 601 025 A - allocation ⇒ page 96


Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	425

For all vehicles with power steering

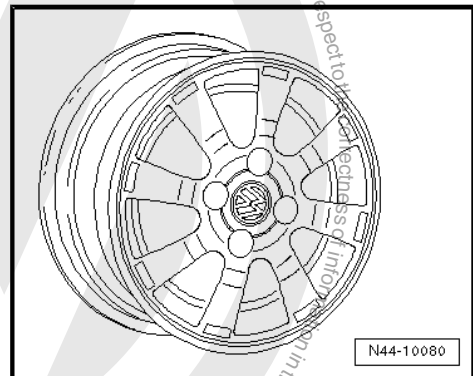


6X0 601 025 D - allocation ⇒ page 96

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	475

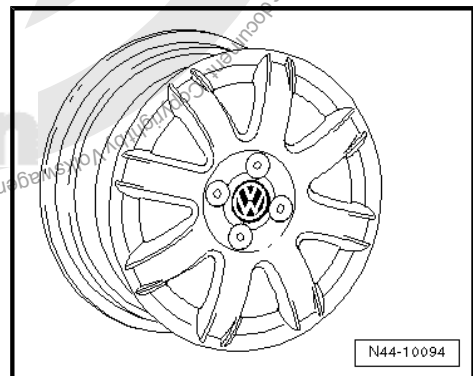

1H0 601 027 A - allocation ⇒ page 96

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	500

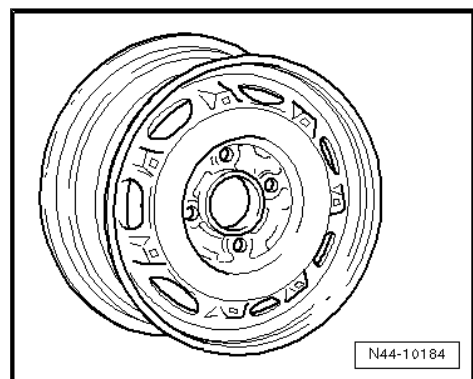

15.7.4 6 J x 15



Caution


Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 96 .



For vehicles with maximum permitted axle load of 840 kg

6N0 601 025 H - allocation ⇒ [page 96](#)


Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	420

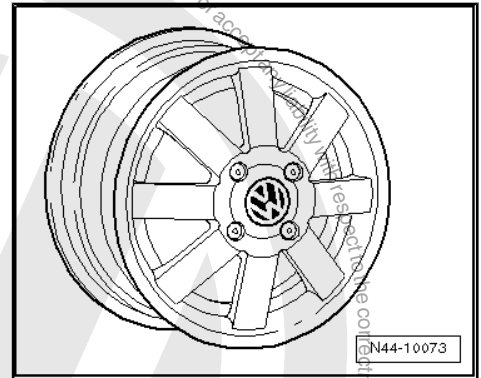

For vehicles with maximum permitted axle load of 850 kg

6N0 601 025 J - allocation ⇒ [page 96](#)


Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	425

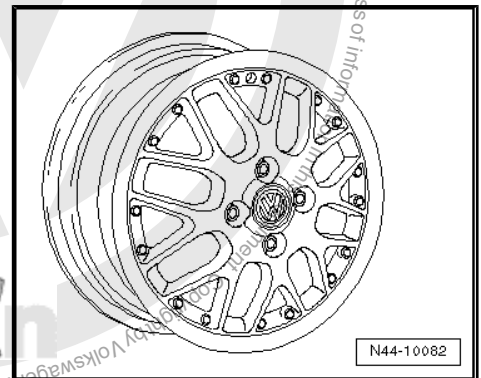

For all vehicles with power steering


1H0 601 025 AD - allocation ⇒ [page 96](#)

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	460

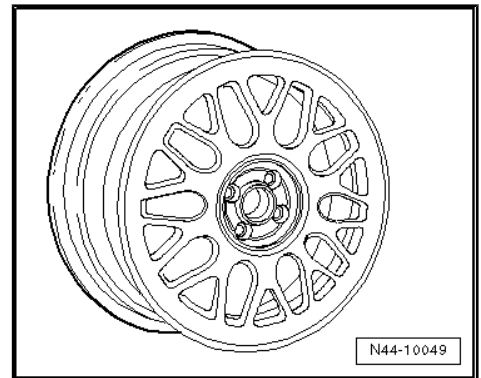

1H0 601 025 AE - allocation ⇒ [page 96](#)


Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	480

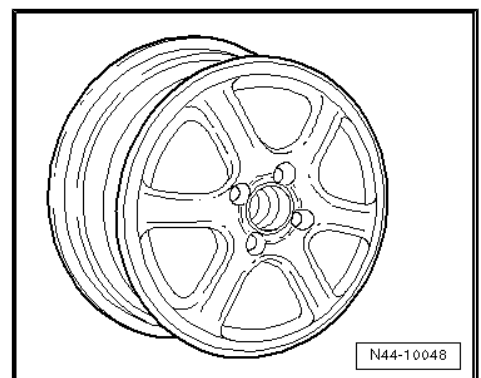




6X0 601 025 C - allocation ⇒ [page 96](#)

Size:	6 J x 15
Wheel offset in mm:	43
Wheel load in kg:	475

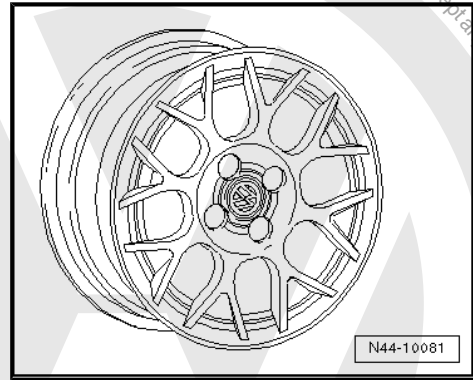

6X0 601 025 E - allocation ⇒ [page 96](#)

Size:	6 J x 15
Wheel offset in mm:	43
Wheel load in kg:	475

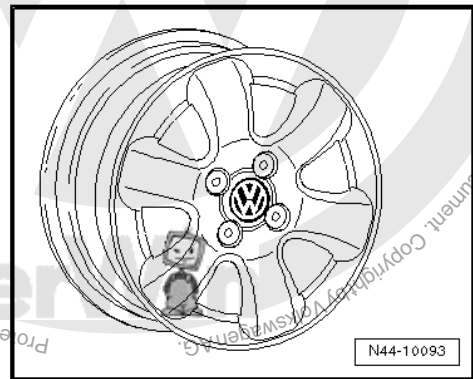



16 Polo Classic model year 1996 to model year 2002

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of genuine Volkswagen spare parts only. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to disc-type wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

16.1 Polo Classic, type 6KV model year 1996 to model year 2002

Appendix 2 to Parts Certificate 1461/02

Type Approval No.: e9*93/81*0008*00 to e9*93/81*0008*08

Type Approval No.: e9*98/14*0008*09 to e9*98/14*0008*16

Overview

Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
Up to 44 kW petrol engines	Standard tyres	185/60 R 14 82H	6 J x 14 ⇒ page 106	38	No	
	Modification	175/70 R 13 82S	5 ¹ / ₂ J x 13 ⇒ page 105	38	No	
		185/60 R 14 82S	6 J x 14 ⇒ page 106	38	No	



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
		185/55 R 15 81S	6 J x 15 ⇒ page 107	38	No	General information on: ♦ Winter tyres ⇒ page 14 ♦ Snow chains ⇒ page 17
	Winter tyres	175/70 R 13 82Q	5 1/2 J x 13 ⇒ page 105	38	Yes	
55 kW petrol engine, up to 55 kW diesel engine	Standard tyres	185/60 R 14 82/83T	6 J x 14 ⇒ page 106	38	No	The winter tyres 175/65 R 14 82Q are not always entered in the vehicle documentation.
	Modification	185/60 R 14 82S	6 J x 14 ⇒ page 106	38	Yes* ⇒ page 104	If necessary, they must be subsequently entered. Tyre makes recommended by Volkswagen: ♦ Summer tyres ⇒ page 460 ♦ Winter tyres ⇒ page 491
		185/55 R 15 82S	6 J x 15 ⇒ page 107	38	Yes* ⇒ page 104	
	Winter tyres	175/65 R 14 82Q	6 J x 14 ⇒ page 106	38	Yes	
		185/60 R 14 82Q* ⇒ page 104	6 J x 14 ⇒ page 106	38	Yes	
66 kW TDI	Standard tyres	185/60 R 14 82/83H	6 J x 14 ⇒ page 106	38	Yes* ⇒ page 104	
	Modification	185/60 R 14 82T	6 J x 14 ⇒ page 106	38	Yes* ⇒ page 104	
		185/55 R 15 81T	6 J x 15 ⇒ page 107	38	Yes* ⇒ page 104	
	Winter tyres	175/65 R 14 82Q	6 J x 14 ⇒ page 106	38	Yes	
185/60 R 14 82Q* ⇒ page 104		6 J x 14 ⇒ page 106	38	Yes		
74 kW 81 kW TDI	Standard tyres	185/60 R 14 83H	6 J x 14 ⇒ page 106	38	Yes* ⇒ page 104	
	Modification	185/60 R 14 82H	6 J x 14 ⇒ page 106	38	Yes* ⇒ page 104	
		185/55 R 15 81H	6 J x 15 ⇒ page 107	38	Yes* ⇒ page 104	



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
	Winter tyres	175/65 R 14 82Q	6 J x 14 ⇒ page 106	38	Yes	
		185/60 R 14 82Q* ⇒ page 104	6 J x 14 ⇒ page 106	38	Yes	

Tyre pressures can be found on the inside of the fuel tank flap or in ⇒ Maintenance ; Booklet 29 .

16.2 Wheel allocation Polo Classic, type 6KV model year 1996 to model year 2002

Explanation of information on wheels ⇒ [page 57](#)

Tightening torques for wheel bolts ⇒ Running gear, axles, steering; Rep. gr. 40 ; Repairing front wheel suspension; II - Repairing wheel bearing

Pitch circle diameter 100 mm
Number of wheel bolt holes: 4


16.2.1 5¹/₂ J x 13

	Caution
<i>Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 103 .</i>	

For 40 kW und 44 kW vehicles


191 601 025 D - Wheel and tyre combination ⇒ [page 103](#)

Size:	5 ¹ / ₂ J x 13
Wheel offset in mm:	38
Wheel load in kg:	410

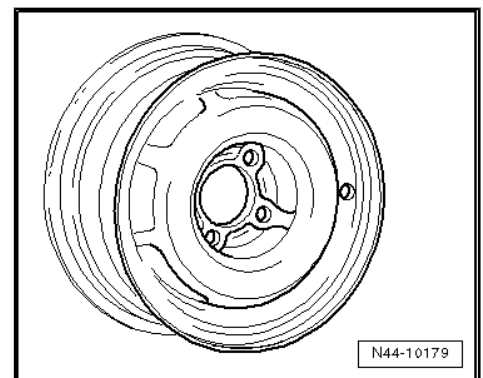

1H0 601 025 A - Wheel and tyre combination ⇒ [page 103](#)

Size:	5 ¹ / ₂ J x 13
Wheel offset in mm:	38
Wheel load in kg:	450

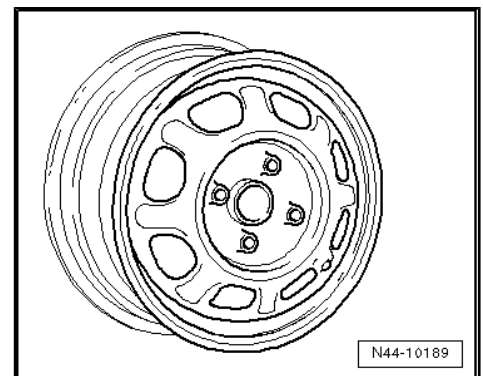



16.2.2 6 J x 14



Caution


Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 103](#) .

For 40 kW and 44 kW vehicles - to VIN 6K W 530 000

1L0 601 025 J - Wheel and tyre combination ⇒ [page 103](#)


Size:	6 J x 14
Wheel offset in mm:	38
Wheel load in kg:	530

For 40 kW and 44 kW vehicles - from vehicle ID No. 6K W 530 001

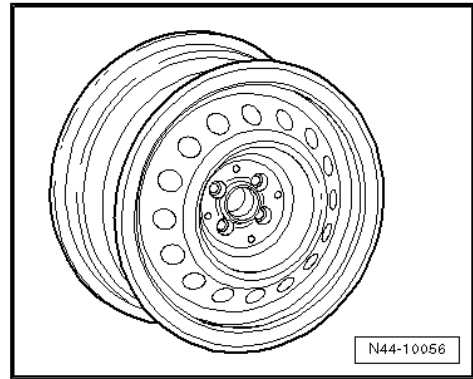

6K9 601 027 - Wheel and tyre combination ⇒ [page 103](#)


Size:	6 J x 14
Wheel offset in mm:	38
Wheel load in kg:	530

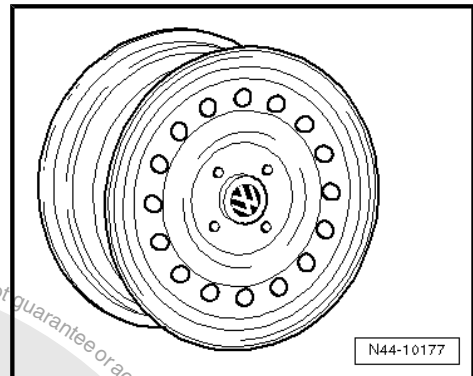

For all vehicles

321 601 025 H - Wheel and tyre combination ⇒ [page 103](#)


Size:	6 J x 14
Wheel offset in mm:	38
Wheel load in kg:	500

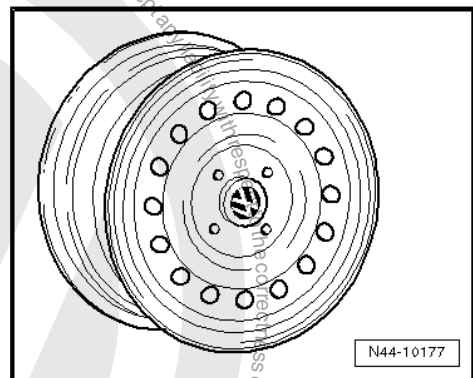




357 601 025 A/Q - Wheel and tyre combination ⇒ page 103

Size:	6 J x 14
Wheel offset in mm:	38
Wheel load in kg:	530

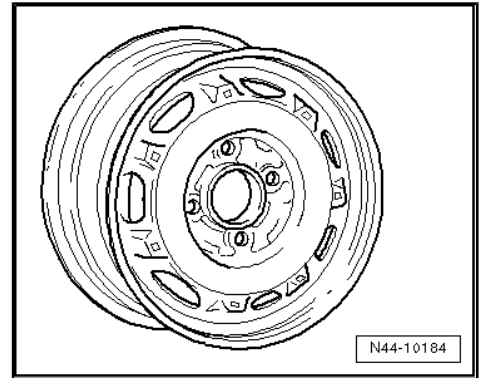


6K0 601 025 M - Wheel and tyre combination ⇒ page 103

Size:	6 J x 14
Wheel offset in mm:	38
Wheel load in kg:	450

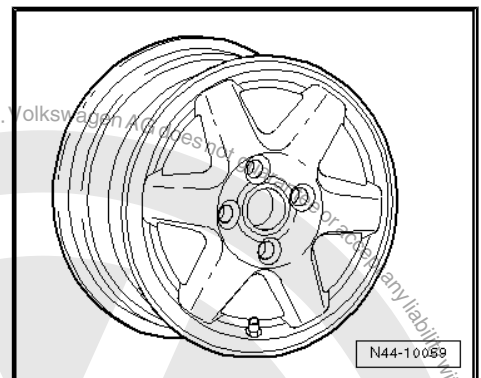

6K0 601 025 S - Wheel and tyre combination ⇒ page 103

Size:	6 J x 14
Wheel offset in mm:	38
Wheel load in kg:	450

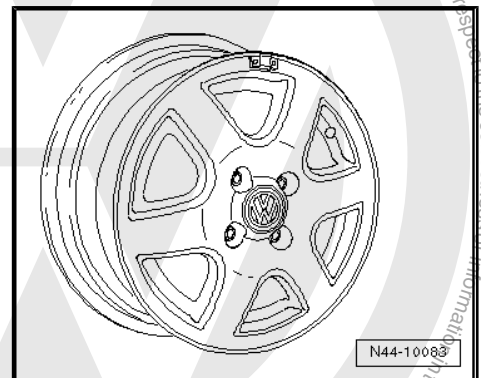

16.2.3 6 J x 15

Caution


Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 103.



For all vehicles


6K0 601 025 Q - Wheel and tyre combination ⇒ page 104

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	450

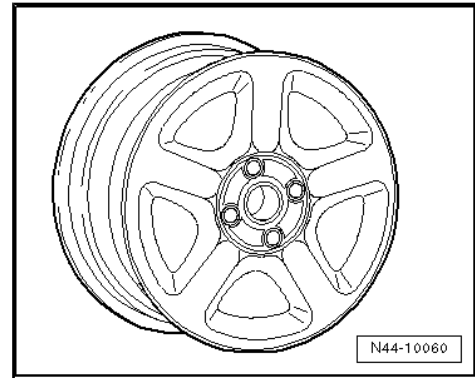

6K0 601 025 AB - Wheel and tyre combination ⇒ page 104

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	450

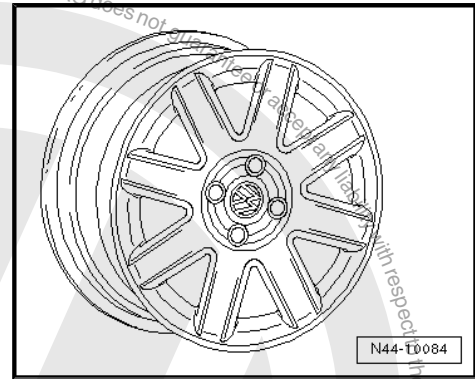

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by Volkswagen AG. Volkswagen AG does not accept any liability for the correctness of information in this document. Copyright by Volkswagen AG.




17 Polo estate model year 1998 to model year 2002

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of genuine Volkswagen spare parts only. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.




WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to disc-type wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

17.1 Polo estate type 6KV model year 1998 to model year 2002

Appendix 2 to Parts Certificate 1461/02

Type Approval No.: e9*93/81*0008*00 to e9*93/81*0008*08

Type Approval No.: e9*98/14*0008*09 to e9*98/14*0008*16

Overview

Model engine output	Tyres	Tyre size	Wheel	Offset in mm	Snow chains	Remarks
Up to 44 kW petrol engines	Standard tyres	185/60 R 14 82H	6 J x 14 ≙ page 112	38	No	
	Modification	175/70 R 13 82S	5 ¹ / ₂ J x 13 ≙ page 111	38	No	
		185/60 R 14 82S	6 J x 14 ≙ page 112	38	No	



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
		185/55 R 15 81S	6 J x 15 ⇒ page 113	38	No	General information on: ♦ Winter tyres ⇒ page 14 ♦ Snow chains ⇒ page 17
	Winter tyres	175/70 R 13 82Q	5 1/2 J x 13 ⇒ page 111	38	Yes	
55 kW petrol engine, up to 55 kW diesel engine	Standard tyres	185/60 R 14 82/83T	6 J x 14 ⇒ page 112	38	No	The winter tyres 175/65 R 14 82Q are not always entered in the vehicle documentation.
	Modification	185/60 R 14 82S	6 J x 14 ⇒ page 112	38	Yes* ⇒ page 110	If necessary, they must be subsequently entered.
		185/55 R 15 82S	6 J x 15 ⇒ page 113	38	Yes* ⇒ page 110	
	Winter tyres	175/65 R 14 82Q	6 J x 14 ⇒ page 112	38	Yes	Tyre makes recommended by Volkswagen:
		185/60 R 14 82Q* ⇒ page 110	6 J x 14 ⇒ page 112	38	Yes	
66 kW TDI	Standard tyres	185/60 R 14 82/83H	6 J x 14 ⇒ page 112	38	Yes* ⇒ page 110	♦ Summer tyres ⇒ page 461 ♦ Winter tyres ⇒ page 492
	Modification	185/60 R 14 82T	6 J x 14 ⇒ page 112	38	Yes* ⇒ page 110	* Valid only for vehicles from 09.99. Use only small-link snow chains.
		185/55 R 15 81T	6 J x 15 ⇒ page 113	38	Yes* ⇒ page 110	
	Winter tyres	175/65 R 14 82Q	6 J x 14 ⇒ page 112	38	Yes	
		185/60 R 14 82Q* ⇒ page 110	6 J x 14 ⇒ page 112	38	Yes	
74 kW 81 kW TDI	Standard tyres	185/60 R 14 83H	6 J x 14 ⇒ page 112	38	Yes* ⇒ page 110	
	Modification	185/60 R 14 82H	6 J x 14 ⇒ page 112	38	Yes* ⇒ page 110	
		185/55 R 15 81H	6 J x 15 ⇒ page 113	38	Yes* ⇒ page 110	



Model engine output	Tyres	Tyre size	Wheel	Offset in mm	Snow chains	Remarks
	Winter tyres	175/65 R 14 82Q	6 J x 14 ⇒ page 112	38	Yes	
		185/60 R 14 82Q* ⇒ page 110	6 J x 14 ⇒ page 112	38	Yes	

Tyre pressures can be found on the inside of the fuel tank flap or in ⇒ Maintenance ; Booklet 29 .

17.2 Wheel allocation Polo estate type 6KV model year 1998 to model year 2002

Explanation of information on wheels ⇒ [page 57](#)

Tightening torques for wheel bolts ⇒ Running gear, axles, steering; Rep. gr. 40 ; Repairing front wheel suspension; II - Repairing wheel bearing

Pitch circle diameter 100 mm
Number of wheel bolt holes: 4


17.2.1 5 1/2 J x 13

	Caution
<i>Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 109 .</i>	

For 40 kW und 44 kW vehicles


191 601 025 D - Wheel and tyre combination ⇒ [page 109](#)

Size:	5 1/2 J x 13
Wheel offset in mm:	38
Wheel load in kg:	410

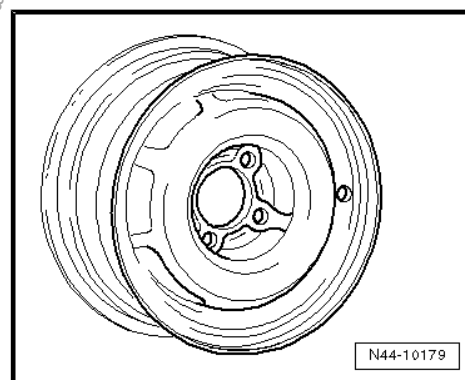

1H0 601 025 A - Wheel and tyre combination ⇒ [page 109](#)

Size:	5 1/2 J x 13
Wheel offset in mm:	38
Wheel load in kg:	450

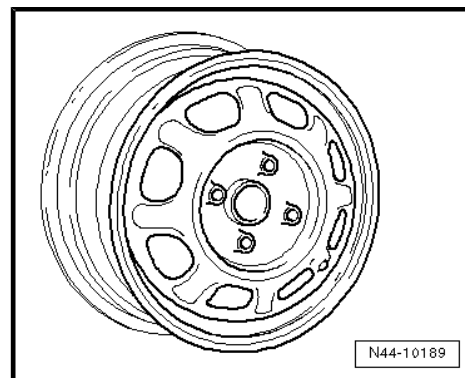



17.2.2 6 J x 14



Caution


Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 109](#) .

For 40 kW and 44 kW vehicles - to VIN 6K W 530 000

1L0 601 025 J - Wheel and tyre combination ⇒ [page 109](#)


Size:	6 J x 14
Wheel offset in mm:	38
Wheel load in kg:	530

For 40 kW and 44 kW vehicles - from vehicle ID No. 6K W 530 001

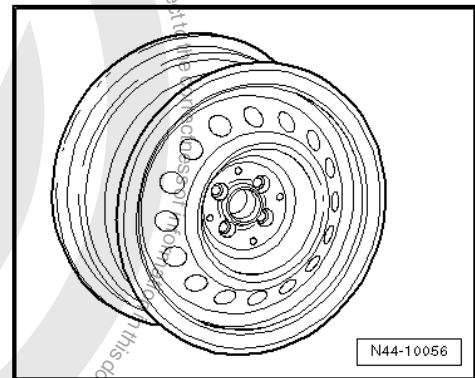

6K9 601 027 - Wheel and tyre combination ⇒ [page 109](#)


Size:	6 J x 14
Wheel offset in mm:	38
Wheel load in kg:	530

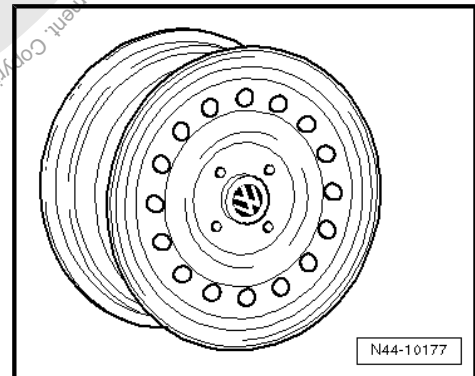

For all vehicles

321 601 025 H - Wheel and tyre combination ⇒ [page 109](#)


Size:	6 J x 14
Wheel offset in mm:	38
Wheel load in kg:	500

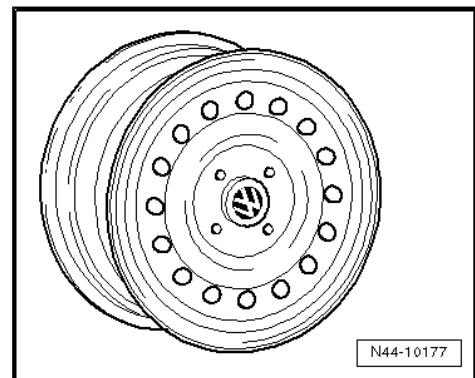




357 601 025 A/Q - Wheel and tyre combination ⇒ page 109

Size:	6 J x 14
Wheel offset in mm:	38
Wheel load in kg:	530

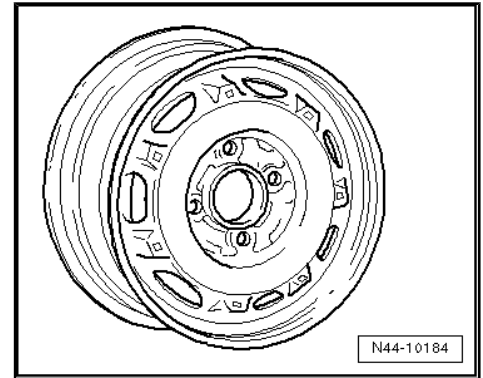


6K0 601 025 M - Wheel and tyre combination ⇒ page 109

Size:	6 J x 14
Wheel offset in mm:	38
Wheel load in kg:	450

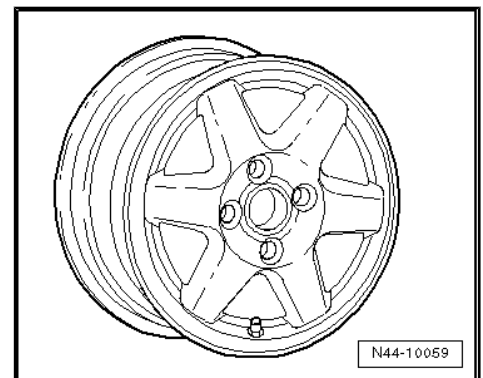

6K0 601 025 S - Wheel and tyre combination ⇒ page 109

Size:	6 J x 14
Wheel offset in mm:	38
Wheel load in kg:	450

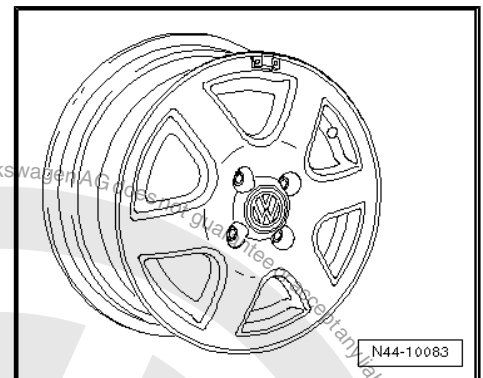

17.2.3 6 J x 15



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 109 .






For all vehicles


6K0 601 025 Q - Wheel and tyre combination ⇒ [page 110](#)

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	450

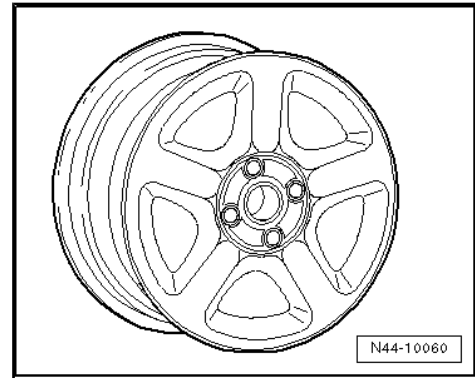

6K0 601 025 AB - Wheel and tyre combination ⇒ [page 110](#)

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	450

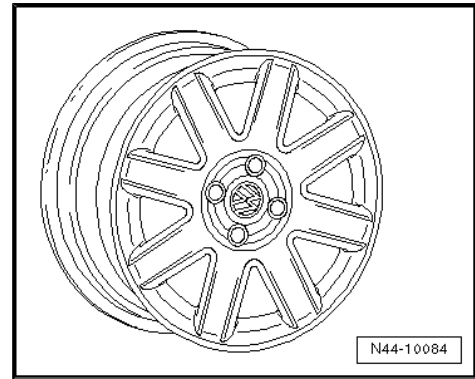



18 Polo from model year 2002

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of only genuine Volkswagen spare parts. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

18.1 Polo, type 9N model year 2002 to model year 2008

Attachment to parts certificate 3879/08

The parts certificate can be found on the Volkswagen ServiceNet under Technology; Guides; Wheels and Tyres Guide.

Type approval number: e1*98/14*0174*00 to e1*98/14*0174*04

Type approval number: e1*2001/116*0174*05 to e1*2001/116*0174*23

Overview

Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
1.2l 40 kW; 1.2l 44 kW without power steering	Standard tyres	155/80 R 13 79S	5 J x 13 ≧ page 122	35	Yes	
	Standard tyres from model year 2003	155/80 R 13 79T	5 J x 13 ≧ page 122	35	Yes	



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks	
	Modification	No changes are permissible apart from the standard wheel and tyre combinations!				General information on: <ul style="list-style-type: none"> ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17 	
	Winter tyres	155/80 R 13 79Q	5 J x 13 ⇒ page 122	35	Yes	Tyre makes recommended by Volkswagen:	
1.2l 40 kW; 1.2l 44 kW with power steering; 1.2l 47 kW; 1.2l 51 kW; 1.4l 55 kW petrol engines; 1.4l 51 kW; 1.4l 55 kW; 1.4l 59 kW; 1.9l 47 kW diesel engines	Standard tyres	165/70 R 14 81T	5 J x 14 ⇒ page 123	35	Yes	<ul style="list-style-type: none"> ◆ Summer tyres ⇒ page 461 ◆ All-season tyres ⇒ page 481 ◆ Winter tyres ⇒ page 489 	
	Modification	185/60 R 14 82T/H	6 J x 14 ⇒ page 123	43	Yes		
		185/55 R 15 82T/H	6 J x 15 ⇒ page 125	43	Yes		
		195/50 R 15 82H	6 J x 15 ⇒ page 125	43	No		
		195/55 R 15 85T/H/V	6 J x 15 ⇒ page 125	43	No		
		205/45 R 16 83T/H/V/W* ⇒ page 116	6 ¹ / ₂ J x 16 ⇒ page 126	38	No		205/45 R 16 83T/H/V/W tyres on 6 ¹ / ₂ J x 16 wheels with offset 38 are only possible in combination with widened wheel housings (Flaps)!
		205/45 R 16 83T/H/V/W	6 ¹ / ₂ J x 16 ⇒ page 126	43	No		
		Winter tyres	165/70 R 14 81Q	5 J x 14 ⇒ page 123	35		Yes
		185/55 R 15 82T/H	6 J x 15 ⇒ page 125	43	Yes		
1.4l 59 kW; 1.4l 63 kW petrol engine	Standard tyres	195/55 R 15 85V	6 J x 15 ⇒ page 125	43	No		
	Modification	165/70 R 14 81T	5 J x 14 ⇒ page 123	35	Yes		
		185/60 R 14 82T/H	6 J x 14 ⇒ page 123	43	Yes		



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
		185/55 R 15 82T/H	6 J x 15 ⇒ page 125	43	Yes	205/45 R 16 83T/H/V/W tyres on 6 ¹ / ₂ J x 16 wheels with offset 38 are only possible in combination with widened wheel housings (Flaps)!
		195/50 R 15 82H	6 J x 15 ⇒ page 125	43	No	
		195/55 R 15 85T/H	6 J x 15 ⇒ page 125	43	No	
		205/45 R 16 83T/H/V/W * ⇒ page 117	6 ¹ / ₂ J x 16 ⇒ page 126	38	No	
		205/45 R 16 83T/H/V/W	6 ¹ / ₂ J x 16 ⇒ page 126	43	No	
	Winter tyres	185/55 R 15 82Q/T/H	6 J x 15 ⇒ page 125	43	Yes	
		185/60 R 14 82Q	6 J x 14 ⇒ page 123	43	Yes	
1.4l 74 kW; 1.6l 77 kW petrol engines 1.9l 74 kW diesel engines	Standard tyres	185/60 R 14 82H	6 J x 14 ⇒ page 123	43	Yes	205/45 R 16 83H/V/W tyres on 6 ¹ / ₂ J x 16 wheels with offset 38 are only possible in combination with widened wheel housings (Flaps)!
	Modification	185/55 R 15 82H	6 J x 15 ⇒ page 125	43	Yes	
		195/50 R 15 82H/V	6 J x 15 ⇒ page 125	43	No	
		195/55 R 15 85H/V	6 J x 15 ⇒ page 125	43	No	
		205/45 R 16 83H/V/W * ⇒ page 117	6 ¹ / ₂ J x 16 ⇒ page 126	38	No	
		205/45 R 16 83H/V/W	6 ¹ / ₂ J x 16 ⇒ page 126	43	No	
	Winter tyres	185/60 R 14 82Q	6 J x 14 ⇒ page 123	43	Yes	
1.9l 96 kW diesel engines	Standard tyres	195/55 R 15 85V	6 J x 15 ⇒ page 125	43	No	



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
	Modification	205/45 R 16 83W * ⇒ page 118	6 1/2 J x 16 ⇒ page 126	38	No	205/45 R 16 83W tyres on 6 1/2 J x 16 wheels with offset 38 are only possible in combination with widened wheel housings (Flaps)!
		205/45 R 16 83W	6 1/2 J x 16 ⇒ page 126	43	No	
	Winter tyres	185/55 R 15 86Q	6 J x 15 ⇒ page 125	43	Yes	

Tyre inflation pressures are located on a sticker on inside of fuel tank flap or in ⇒ Maintenance ; Booklet ; Check tyres: condition, profile, inflation pressure, depth of tread

18.2 Polo, type 9N model year 2009

Attachment to parts certificate 3879/08

The parts certificate can be found on the Volkswagen ServiceNet under Technology; Guides; Wheels and Tyres Guide.

Type approval number: e1*2001/116*0174*24 to e1*2001/116*0174*25

Overview

Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
1.2l 44 kW with no PAS	Standard tyres	155/80 R 13 79T	5 J x 13 ⇒ page 122	35	Yes	General information on: ♦ Winter tyres ⇒ page 14 ♦ Snow chains ⇒ page 17 Tyre makes recommended by Volkswagen:
	Modification	No changes are permissible apart from the standard wheel and tyre combinations!				
	Winter tyres	155/80 R 13 79Q	5 J x 13 ⇒ page 122	35	Yes	
1.2l 44 kW with PAS; 1.2l 51 kW; 1.4l 59 kW petrol engines;	Standard tyres	165/70 R 14 81T	5 J x 14 ⇒ page 123	35	Yes	♦ Summer tyres ⇒ page 461 ♦ All-season tyres ⇒ page 481 ♦ Winter tyres ⇒ page 489
	Modification	185/60 R 14 82T/H	6 J x 14 ⇒ page 123	43	Yes	
1.4l 51 kW; 1.4l 59 kW; diesel engines		185/55 R 15 82T/H	6 J x 15 ⇒ page 125	43	Yes	



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
		195/50 R 15 82H	6 J x 15 ⇒ page 125	43	No	<p>205/45 R 16 83T/H/V/W tyres on 6¹/₂ J x 16 wheels with offset 38 are only possible in combination with widened wheel housings (Flaps)!</p> <p>205/40 R 17 84H/V/W tyres on 7¹/₂ J x 17 wheels with offset 38 are only permitted under the following conditions:</p> <ul style="list-style-type: none"> ◆ Vehicles with 4 doors: curtain and side airbags may not be installed or must be deactivated. ◆ Sports running gear must be installed ◆ Widened wheel housings (Flaps) must be installed
		195/55 R 15 85T/H/V	6 J x 15 ⇒ page 125	43	No	
		205/45 R 16 83T/H/V/W * ⇒ page 119	6 ¹ / ₂ J x 16 ⇒ page 126	38	No	
		205/45 R 16 83T/H/V/W	6 ¹ / ₂ J x 16 ⇒ page 126	43	No	
		205/40 R 17 84T/H/V/W * ⇒ page 119	7 ¹ / ₂ J x 17 ⇒ page 129	38	No	
	Winter tyres	165/70 R 14 81Q	5 J x 14 ⇒ page 123	35	Yes	
		185/55 R 15 82Q/T/H	6 J x 15 ⇒ page 125	43	Yes	
1.4l 55 kW petrol engine with automatic gear-box	Standard tyres	165/70 R 14 81T	5 J x 14 ⇒ page 123	35	Yes	
	Modification	185/60 R 14 82T/H	6 J x 14 ⇒ page 123	43	Yes	
		185/55 R 15 82T/H	6 J x 15 ⇒ page 125	43	Yes	
		195/50 R 15 82H	6 J x 15 ⇒ page 125	43	No	
		195/55 R 15 85T/H/V	6 J x 15 ⇒ page 125	43	No	



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
		205/45 R 16 83T/H/V/W* ⇒ page 120	6 ¹ / ₂ J x 16 ⇒ page 126	38	No	205/45 R 16 83T/H/V/W tyres on 6 ¹ / ₂ J x 16 wheels with offset 38 are only possible in combination with widened wheel housings (Flaps)!
		205/45 R 16 83T/H/V/W	6 ¹ / ₂ J x 16 ⇒ page 126	43	No	
	Winter tyres	165/70 R 14 81Q	5 J x 14 ⇒ page 123	35	Yes	
		185/55 R 15 82Q/T/H	6 J x 15 ⇒ page 125	43	Yes	
1.4l 74 kW petrol engine	Standard tyres	185/60 R 14 82H	6 J x 14 ⇒ page 123	43	Yes	205/45 R 16 83H/V/W tyres on 6 ¹ / ₂ J x 16 wheels with offset 38 are only possible in combination with widened wheel housings (Flaps)!
	Modification	185/55 R 15 82H	6 J x 15 ⇒ page 125	43	Yes	
		195/50 R 15 82H/V	6 J x 15 ⇒ page 125	43	No	
		195/55 R 15 85H/V	6 J x 15 ⇒ page 125	43	No	
		205/45 R 16 83H/V/W* ⇒ page 120	6 ¹ / ₂ J x 16 ⇒ page 126	38	No	
	Winter tyres	205/45 R 16 83H/V/W	6 ¹ / ₂ J x 16 ⇒ page 126	43	No	
		185/60 R 14 82Q	6 J x 14 ⇒ page 123	43	Yes	
	185/55 R 15 82Q/T/H	6 J x 15 ⇒ page 125	43	Yes		
1.6l 77 kW petrol engine	Standard tyres	185/60 R 14 82H	6 J x 14 ⇒ page 123	43	Yes	
1.9l 74 kW diesel engine	Modification	185/55 R 15 82H	6 J x 15 ⇒ page 125	43	Yes	
		195/50 R 15 82H/V	6 J x 15 ⇒ page 125	43	No	
		195/55 R 15 85H/V	6 J x 15 ⇒ page 125	43	No	



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
		205/45 R 16 83H/V/W * ⇒ page 121	6 ¹ / ₂ J x 16 ⇒ page 126	38	No	205/45 R 16 83H/V/W tyres on 6 ¹ / ₂ J x 16 wheels with offset 38 are only possible in combination with widened wheel housings (Flaps)!
		205/45 R 16 83H/V/W	6 ¹ / ₂ J x 16 ⇒ page 126	43	No	
		205/40 R 17 84H/V/W * ⇒ page 121	7 ¹ / ₂ J x 17 ⇒ page 129	38	No	
	Winter tyres	185/60 R 14 82Q	6 J x 14 ⇒ page 123	43	Yes	
		185/55 R 15 82Q/T/H	6 J x 15 ⇒ page 125	43	Yes	
1.9l 96 kW diesel engines	Standard tyres	195/55 R 15 85V	6 J x 15 ⇒ page 125	43	No	205/45 R 16 83W tyres on 6 ¹ / ₂ J x 16 wheels with offset 38 are only possible in combination with widened wheel housings (Flaps)!
	Modification	205/45 R 16 83W * ⇒ page 121	6 ¹ / ₂ J x 16 ⇒ page 126	38	No	
		205/45 R 16 83W	6 ¹ / ₂ J x 16 ⇒ page 126	43	No	



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
		205/40 R 17 84W * ⇒ page 122	7 ¹ / ₂ J x 17 ⇒ page 129	38	No	205/40 R 17 84W tyres on 7 ¹ / ₂ J x 17 wheels with offset 38 are only permitted under the following conditions: <ul style="list-style-type: none"> ◆ Vehicles with 4 doors: curtain and side airbags may not be installed or must be deactivated ◆ Sports running gear must be installed ◆ Widened wheel housings (Flaps) must be installed
	Winter tyres	185/55 R 15 86Q	6 J x 15 ⇒ page 125	43	Yes	

Tyre inflation pressures are located on a sticker on inside of fuel tank flap or in ⇒ Maintenance ; Booklet ; Check tyres: condition, profile, inflation pressure, depth of tread .

18.3 Wheel allocation for Polo, type 9N model year 2002 to model year 2009

Explanation of information on wheels ⇒ [page 57](#)

Torque specifications for wheel bolts ⇒ Running gear, axles, steering; Rep. gr. 44 ; Fitting wheels and tyres; Fitting wheels

Pitch circle diameter: 100 mm

Number of wheel bolt holes: 5

18.3.1 5 J x 13



Caution


Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 115](#) .



For 1.2l 40 kW, 44 kW without power steering

6Q0 601 027 E - Wheel and tyre combination ⇒ [page 115](#)

Size:	5 J x 13
Wheel offset in mm:	35
Wheel load in kg:	400

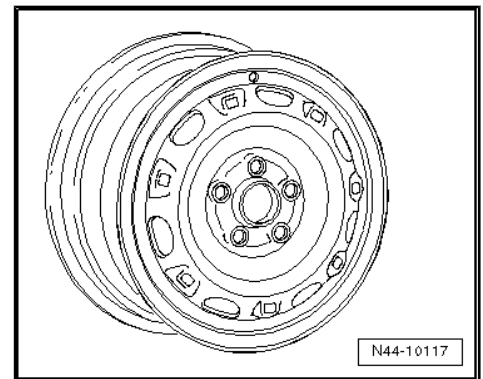

18.3.2 5 J x 14




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 115](#).

For 1.2l 40 kW, 44 kW with power steering, 1.2l 47 kW, 51 kW, 1.4l 55 kW, 59 kW; 63 kW and 74 kW, 1.6l 77 kW, 1.4l 51 kW, 55 kW, 59 kW diesel, 1.9l 47 kW

6Q0 601 027 H, 6Q0 601 027 R - Wheel and tyre combination ⇒ [page 116](#)


Size:	5 J x 14
Wheel offset in mm:	35
Wheel load in kg:	455

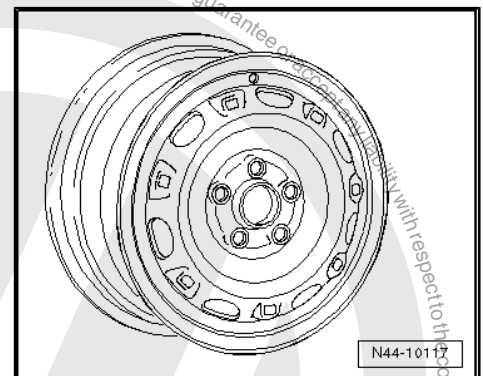

6Q0 601 025 AC - Wheel and tyre combination ⇒ [page 116](#)

Only for vehicles to maximum permissible axle load of 870 kg

Size:	5 J x 14
Wheel offset in mm:	35
Wheel load in kg:	435

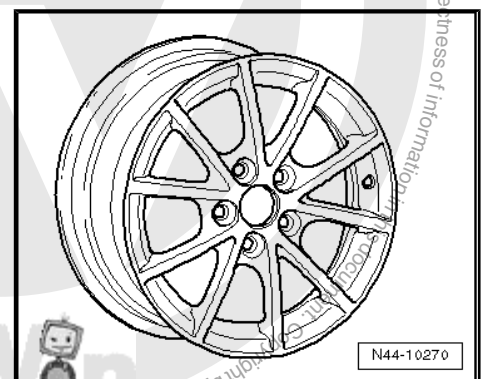

18.3.3 6 J x 14



Caution


Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 115](#).



For 1.2l 40 kW, 44 kW with power steering, 1.2l 47 kW, 51 kW,
1.4l 55 kW, 59 kW; 63 kW and 74 kW, 1.6l 77 kW, 1.4l 51 kW, 55
kW, 59 kW diesel, 1.9l 47 kW, 74 kW


6Q0 601 027 F, 6Q0 601 027 P - Wheel and tyre combination
⇒ [page 116](#)

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	465

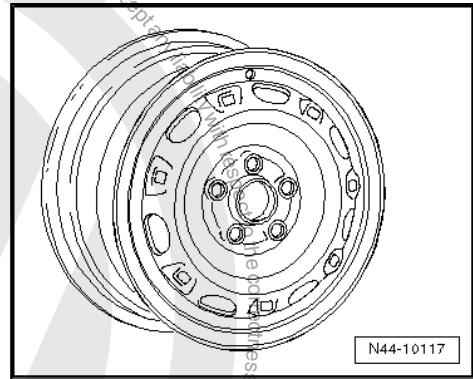


6Q0 601 025 Q - Wheel and tyre combination ⇒ [page 116](#)

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	465

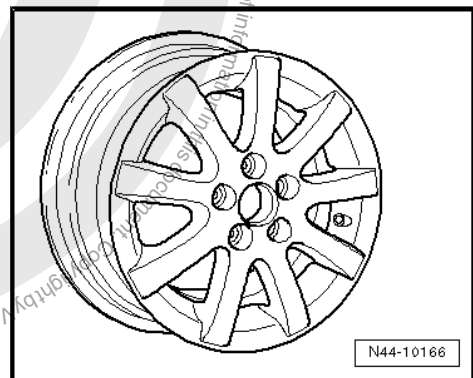


6Q0 601 025 K - Wheel and tyre combination ⇒ [page 116](#)

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	465

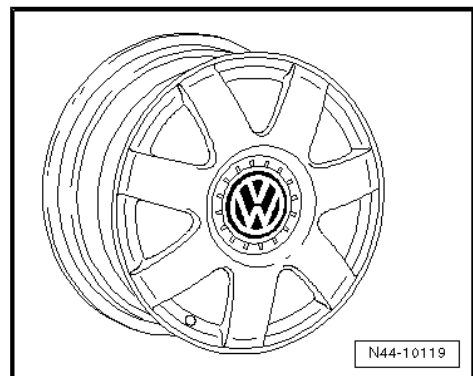

6Q0 601 025 AB - Wheel and tyre combination ⇒ [page 116](#)

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	465

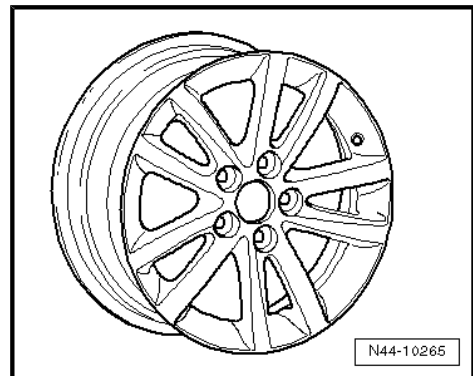



18.3.4 6 J x 15




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 115](#).

For 1.2l 40 kW, 44 kW with power steering, 1.2l 47 kW, 51 kW, 1.4l 55 kW, 59 kW; 63 kW and 74 kW, 1.6l 77 kW, 1.4l 51 kW, 55 kW, 59 kW diesel, 1.9l 47 kW, 74 kW


6Q0 601 027 G, 6Q0 601 027 Q - Wheel and tyre combination
 ⇒ [page 116](#)

Size:	6 J x 15
Wheel offset in mm:	43
Wheel load in kg:	500

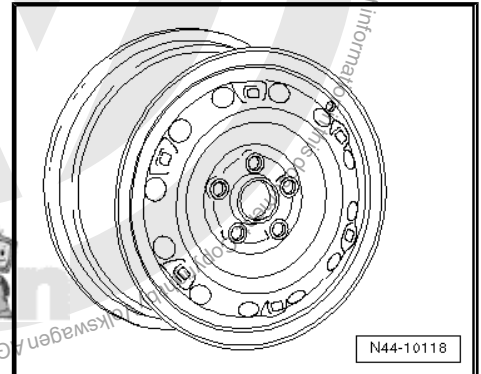


6Q0 601 025 L - Wheel and tyre combination ⇒ [page 116](#)

Size:	6 J x 15
Wheel offset in mm:	43
Wheel load in kg:	475

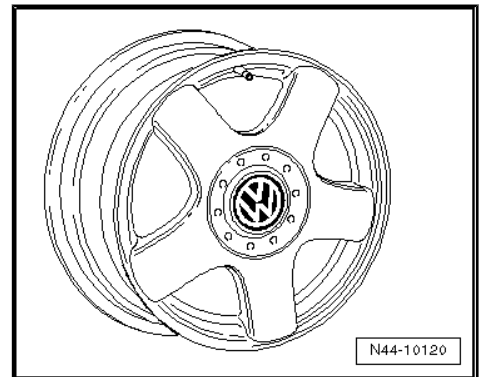

6Q0 601 025 R - Wheel and tyre combination ⇒ [page 116](#)

Size:	6 J x 15
Wheel offset in mm:	43
Wheel load in kg:	480

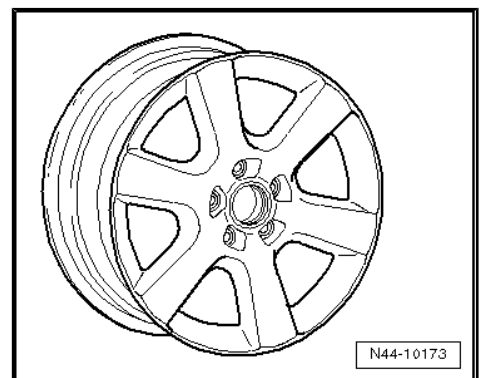


For 96 kW diesel




6Q0 601 027 G, 6Q0 601 027 Q - Wheel and tyre combination
⇒ [page 117](#)

Size:	6 J x 15
Wheel offset in mm:	43
Wheel load in kg:	500

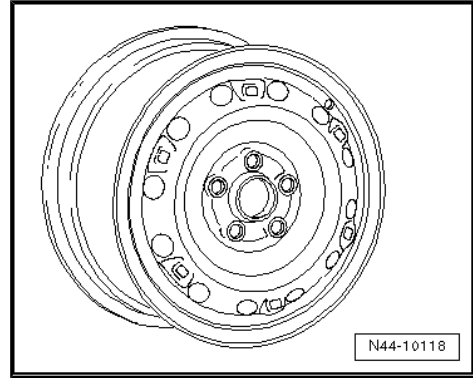

6Q0 601 025 R - Wheel and tyre combination ⇒ [page 116](#)

Size:	6 J x 15
Wheel offset in mm:	43
Wheel load in kg:	480

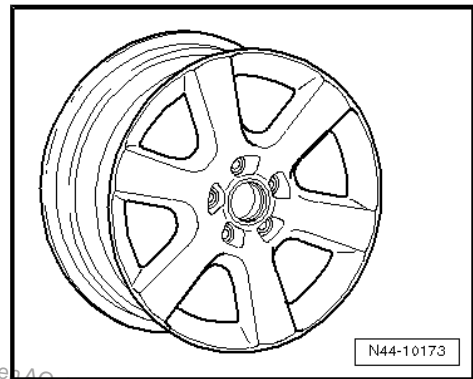

18.3.5 6¹/₂ J x 16 offset 38




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 115](#).

205/45 R 16 83T/H/V/W tyres on 6¹/₂ J x 16 wheels with offset 38 are only possible in combination with widened wheel housings (Flaps)!

6Q0 601 025 AD - Wheel and tyre combination ⇒ [page 116](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	38
Wheel load in kg:	480

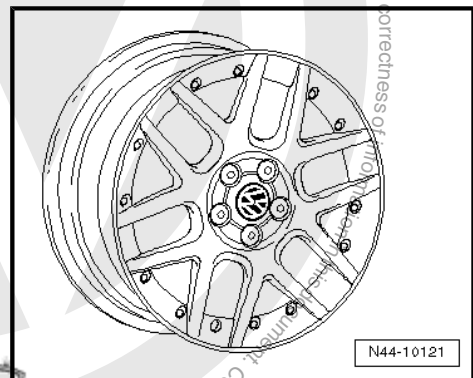

18.3.6 6¹/₂ J x 16 offset 43



Caution


Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 115](#).



For 1.2l 40 kW, 44 kW with power steering, 1.2l 47 kW, 51 kW,
 1.4l 55 kW, 59 kW; 63 kW and 74 kW, 1.6l 77 kW, 1.4l 51 kW, 55
 kW, 59 kW diesel, 1.9l 47 kW, 74 kW


6Q0 601 025 C - Wheel and tyre combination ⇒ page 116

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	43
Wheel load in kg:	480

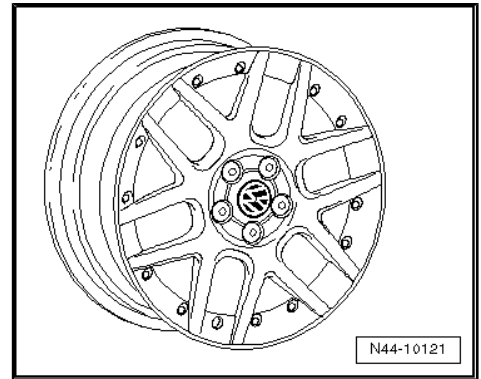


6Q0 601 025 D - Wheel and tyre combination ⇒ page 116

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	43
Wheel load in kg:	475

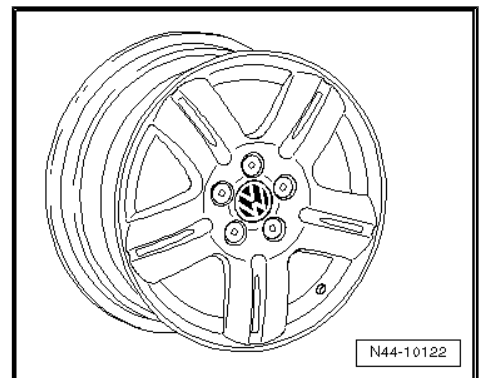


6Q0 601 025 S - Wheel and tyre combination ⇒ page 116

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	43
Wheel load in kg:	480

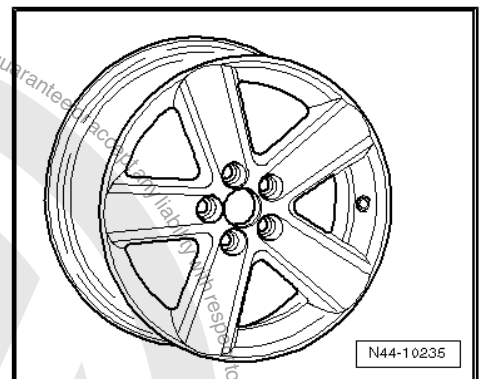

6Q0 601 025 T - Wheel and tyre combination ⇒ page 116

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	43
Wheel load in kg:	480

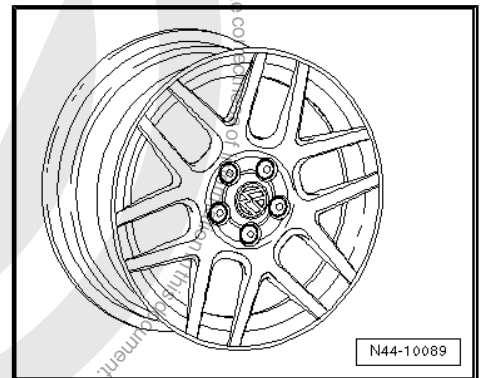




6Q0 601 025 AA - Wheel and tyre combination ⇒ page 116


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	43
Wheel load in kg:	480

For 96 kW diesel

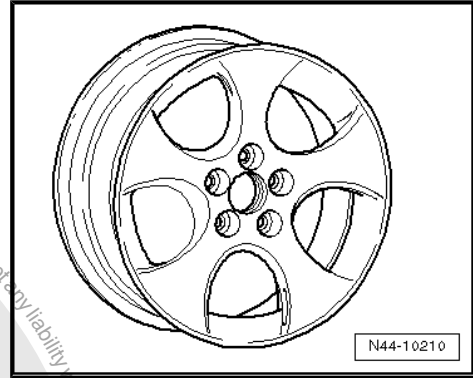


6Q0 601 025 C - Wheel and tyre combination ⇒ page 116

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	43
Wheel load in kg:	480

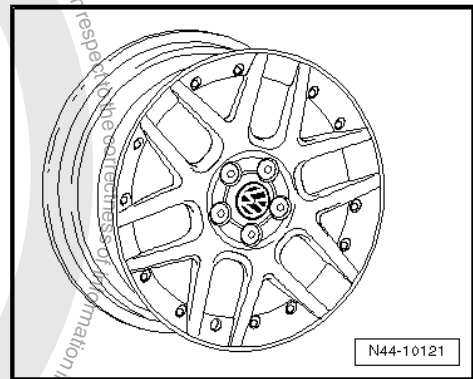


6Q0 601 025 S - Wheel and tyre combination ⇒ page 116

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	43
Wheel load in kg:	480

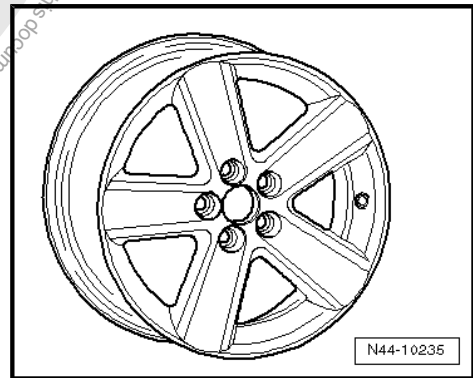

6Q0 601 025 T - Wheel and tyre combination ⇒ page 116


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	43
Wheel load in kg:	480

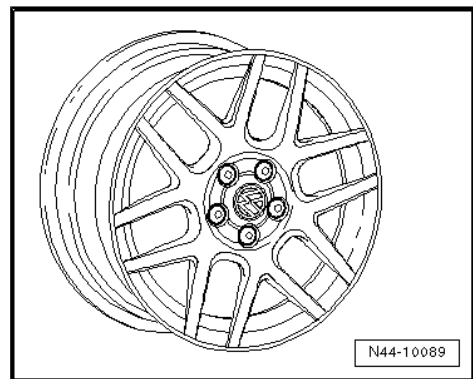



6Q0 601 025 AA - Wheel and tyre combination ⇒ [page 116](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	43
Wheel load in kg:	480

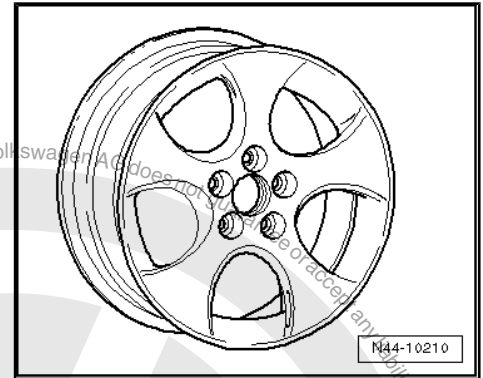

18.3.7 7¹/₂ J x 17 offset 38



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 115](#).




WARNING

205/40 R 17 84H/V/W tyres on 7¹/₂ J x 17 wheels with offset 38 are only permitted under the following conditions:

- ◆ *Vehicles with 4 doors: curtain and side airbags may not be installed or must be deactivated*
- ◆ *Sports running gear must be installed*
- ◆ *Widened wheel housings (Flaps) must be installed*

1J0 601 025 BC - Wheel and tyre combination ⇒ [page 119](#)

Size:	7 ¹ / ₂ J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

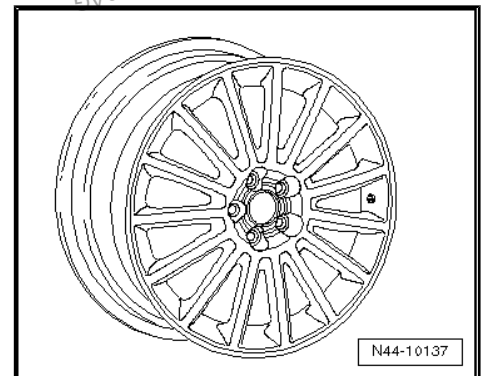



19 Polo Fun model year 2004 to model year 2005

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of only genuine Volkswagen spare parts. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

19.1 Polo Fun, type 9N model year 2004 to model year 2005

Attachment to parts certificate 3176/05

The parts certificate can be found on the Volkswagen ServiceNet under Technology; Guides; Wheels and Tyres Guide.

Type approval number: e1*2001/116*0174*07 to e1*2001/116*0174*14

Overview

Model engine output	Tyres	Tyre size	Wheel rim	Offset in mm	Snow chains	Remarks
1.2l 40 kW 1.2l 47 kW 1.4l 55 kW 1.4l 63 kW 1.4l 74 kW petrol engines	Standard tyres	215/40 ZR 17 83W	7 ¹ / ₂ J x 17 ⇒ page 131	35	No	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
1.4l 55 kW 1.9l 74 kW diesel engines	Modification	No changes are permissible apart from the standard wheel and tyre combinations!				Tyre makes recommended by Volkswagen: ♦ Summer tyres ⇒ page 462 ♦ Winter tyres ⇒ page 490
	Winter tyres	185/60 R 15 84Q/T	6 J x 15 ⇒ page 131	38	Yes	

Tyre inflation pressures are located on a sticker on inside of fuel tank flap or in ⇒ Maintenance ; Booklet ; Check tyres: condition, profile, inflation pressure, depth of tread .

19.2 Wheel allocation for Polo Fun, type 9N model year 2004 to model year 2005

Explanation of information on wheels ⇒ [page 57](#)

Torque specifications for wheel bolts ⇒ Running gear, axles, steering; Rep. gr. 44 ; Fitting wheels and tyres; Fitting wheels

Pitch circle diameter: 100 mm

Number of wheel bolt holes: 5

19.2.1 6 J x 15




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 130](#) .

1J0 601 027 Q - Wheel and tyre combination ⇒ [page 131](#)

Winter wheel

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	550

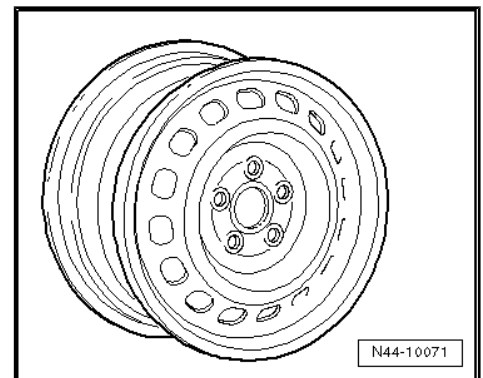

19.2.2 7 1/2 J x 17




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 130](#) .



6Q0 601 025 J - Wheel and tyre combination ⇒ [page 130](#)

Size:	7 ¹ / ₂ J x 17
Wheel offset in mm:	35
Wheel load in kg:	480

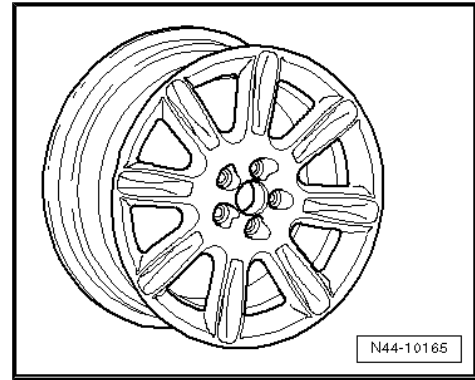




20 CrossPolo from model year 2006

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of only genuine Volkswagen spare parts. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.




WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

20.1 CrossPolo, type 9N model year 2006 to model year 2009

Attachment to parts certificate 3879/08

The parts certificate can be found on the Volkswagen ServiceNet under Technology; Guides; Wheels and Tyres Guide.

Type approval number: e1*2001/116*0174*15 to e1*2001/116*0174*25

Overview

Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
1.2l 47 kW 1.2l 51 kW 1.4l 55 kW 1.4l 59 kW 1.4l 74 kW 1.6l 77 kW petrol engines	Standard tyres	215/40 ZR 17 83W	7 1/2 J x 17 ⇒ page 134	35	No	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17
1.4l 51 kW 1.9l 74 kW diesel engines	Modification	No changes are permissible apart from the standard wheel and tyre combinations!				Tyre makes recommended by Volkswagen:



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
	Winter tyres	185/60 R 15 84Q/T	6 J x 15 ⇒ page 134	38	Yes	<ul style="list-style-type: none"> ◆ Summer tyres ⇒ page 462 ◆ Winter tyres ⇒ page 490

Tyre inflation pressures are located on a sticker on inside of fuel tank flap or in ⇒ Maintenance ; Booklet ; Check tyres: condition, profile, inflation pressure, depth of tread .

20.2 Wheel allocation for CrossPolo, type 9N model year 2006 to model year 2009

Explanation of information on wheels ⇒ [page 57](#)

Torque specifications for wheel bolts ⇒ Running gear, axles, steering; Rep. gr. 44; Fitting wheels and tyres; Fitting wheels

Pitch circle diameter: 100 mm
Number of wheel bolt holes: 5

20.2.1 6 J x 15




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 133](#) .

1J0 601 027 Q - Wheel and tyre combination ⇒ [page 134](#)

Winter wheel

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	550

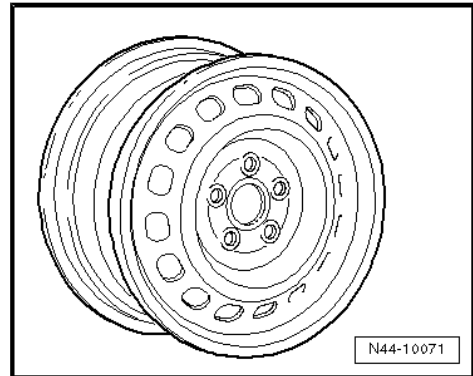

20.2.2 7 1/2 J x 17




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 133](#) .




6Q0 601 025 J - Wheel and tyre combination ⇒ [page 133](#)

Size:	7 ¹ / ₂ J x 17
Wheel offset in mm:	35
Wheel load in kg:	480

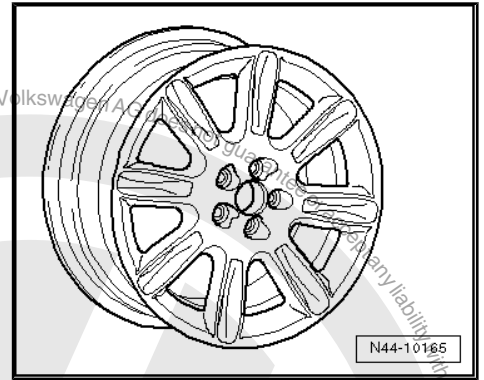

6Q0 601 025 AF- Wheel and tyre combination ⇒ [page 133](#)

Size:	7 ¹ / ₂ J x 17
Wheel offset in mm:	35
Wheel load in kg:	480

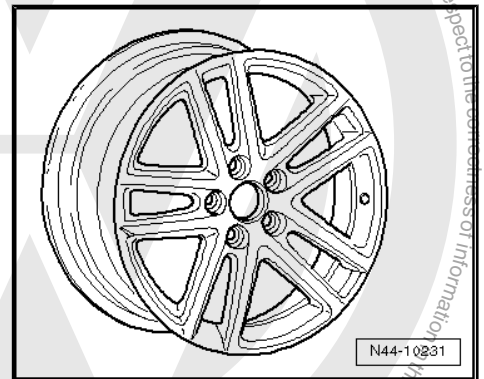



21 Polo BlueMotion from model year 2007

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of only genuine Volkswagen spare parts. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

21.1 Polo BlueMotion, type 9N model year 2007 to model year 2009

Attachment to parts certificate 3879/08

The parts certificate can be found on the Volkswagen ServiceNet under Technology; Guides; Wheels and Tyres Guide.

Type approval number: e1*2001/116*0174*17 to e1*2001/116*0174*25

Overview

Model engine output	Tyres	Tyre size	Wheel rim	Offset in mm	Snow chains	Remarks
1.4l 59 kW diesel engine	Standard tyres	165/70 R14 81T	5 J x 14 ⇒ page 137	35	Yes	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
	Modification	No changes are permissible apart from the standard wheel and tyre combinations!				Tyre makes recommended by Volkswagen:
	Winter tyres	165/70 R14 81Q	5 J x 14 ⇒ page 137	35	Yes	<ul style="list-style-type: none"> ◆ Summer tyres ⇒ page 462 ◆ Winter tyres ⇒ page 490

Tyre inflation pressures are located on a sticker on inside of fuel tank flap or in Maintenance ; Booklet ; Check tyres: condition, profile, inflation pressure, depth of tread .

21.2 Wheel allocation for Polo BlueMotion, type 9N model year 2007 to model year 2009

Explanation of information on wheels ⇒ [page 57](#)

Torque specifications for wheel bolts ⇒ Running gear, axles, steering; Rep. gr. 44 Fitting wheels and tyres; Fitting wheels

Pitch circle diameter:

100 mm

Number of wheel bolt holes:

5

21.2.1 5 J x 14




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 136](#) .

6Q0 601 027 H, 6Q0 601 027 R - Wheel and tyre combination ⇒ [page 136](#)


Size:	5 J x 14
Wheel offset in mm:	35
Wheel load in kg:	455

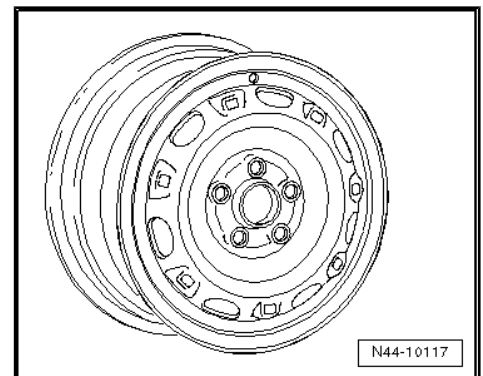



6Q0 601 025 AC - Wheel and tyre combination ⇒ [page 136](#)

Size:	5 J x 14
Wheel offset in mm:	35
Wheel load in kg:	435

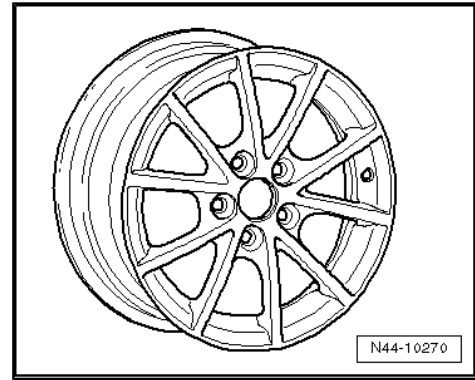



22 Polo GTI from model year 2006

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of only genuine Volkswagen spare parts. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

22.1 Polo GTI, type 9N model year 2006 to model year 2009

Attachment to parts certificate 3879/08

The parts certificate can be found on the Volkswagen ServiceNet under Technology; Guides; Wheels and Tyres Guide.

Type approval number: e1*2001/116*0174*14 to e1*2001/116*0174*25

Overview

Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
1.8l 110 kW petrol engine	Standard tyres	205/45 R 16 83V/W	6 ¹ / ₂ J x 16 ⇒ page 141	38	No	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17
		205/45 R 16 83V/W	6 ¹ / ₂ J x 16 ⇒ page 141	43	No	Tyre makes recommended by Volkswagen:



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
	Modification	195/55 R 15 85V	6 J x 15 ⇒ page 140	43	No	<ul style="list-style-type: none"> ◆ Summer tyres ⇒ page 463 ◆ Winter tyres ⇒ page 490
		205/40 R17 84W * ⇒ page 140	7 J x 17 ⇒ page 143	38	No	
		205/40 R17 84W * ⇒ page 140	7 1/2 J x 17 ⇒ page 144	38	No	
	Winter tyres	185/55 R 15 82Q	6 J x 15 ⇒ page 140	43	Yes	* Vehicles with 4 doors: curtain and side airbags may not be installed or must be deactivated.

Tyre inflation pressures are located on a sticker on inside of fuel tank flap or in ⇒ Maintenance ; Booklet ; Check tyres: condition, profile, inflation pressure, depth of tread .

22.2 Wheel allocation for Polo GTI, type 9N model year 2006 to model year 2009

Explanation of information on wheels ⇒ [page 57](#)

Torque specifications for wheel bolts ⇒ Running gear, axles, steering; Rep. gr. 44 ; Fitting wheels and tyres; Fitting wheels

Pitch circle diameter: 100 mm

Number of wheel bolt holes: 5

22.2.1 6 J x 15




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 139](#) .

6Q0 601 027 G, 6Q0 601 027 Q - Wheel and tyre combination
⇒ [page 140](#)


Size:	6 J x 15
Wheel offset in mm:	43
Wheel load in kg:	500

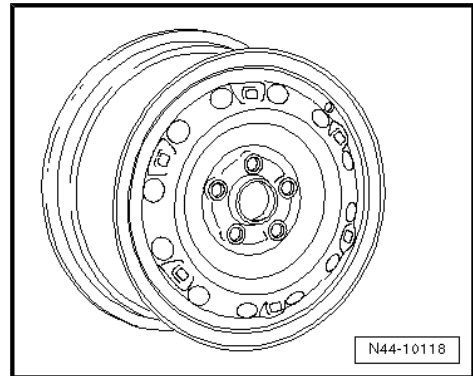




6Q0 601 025 L - Wheel and tyre combination ⇒ page 140

Size:	6 J x 15
Wheel offset in mm:	43
Wheel load in kg:	475

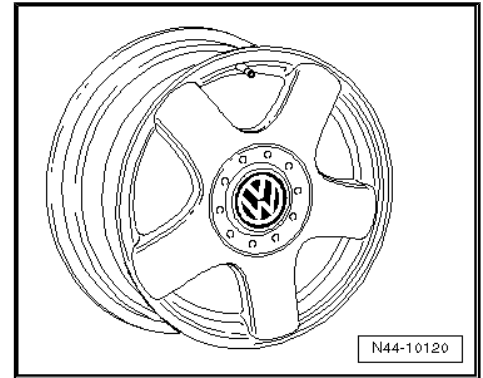


6Q0 601 025 R - Wheel and tyre combination ⇒ page 140

Size:	6 J x 15
Wheel offset in mm:	43
Wheel load in kg:	480

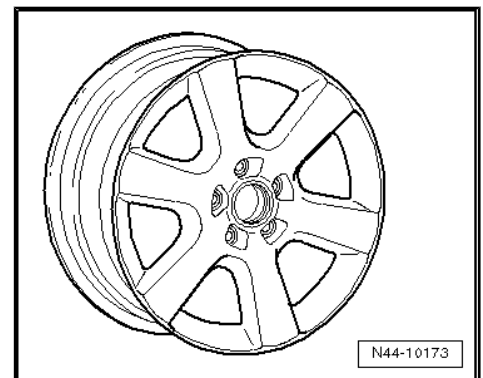

22.2.2 6¹/₂ J x 16 offset 38


 **Caution**

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 139 .


205/45 R 16 83V/W tyres on 6¹/₂ J x 16 wheels with offset 38 are only possible in combination with widened wheel housings (FLAPS)!

6Q0 601 025 AD - Wheel and tyre combination ⇒ page 139

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	38
Wheel load in kg:	480

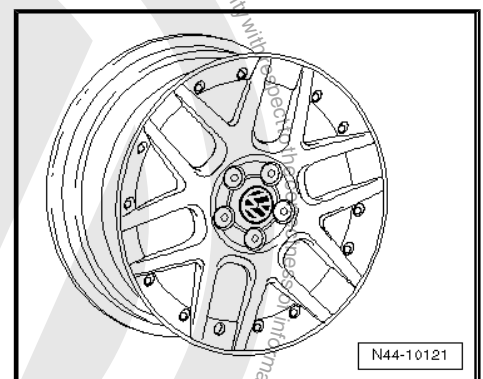

22.2.3 6¹/₂ J x 16 offset 43


 **Caution**

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 139 .




6Q0 601 025 D - Wheel and tyre combination ⇒ page 139

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	43
Wheel load in kg:	475

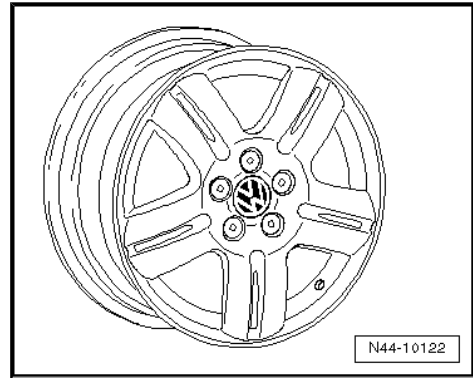


6Q0 601 025 S - Wheel and tyre combination ⇒ page 139

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	43
Wheel load in kg:	480

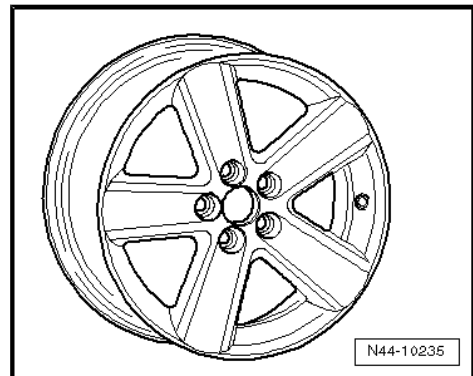


6Q0 601 025 T - Wheel and tyre combination ⇒ page 139

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	43
Wheel load in kg:	480

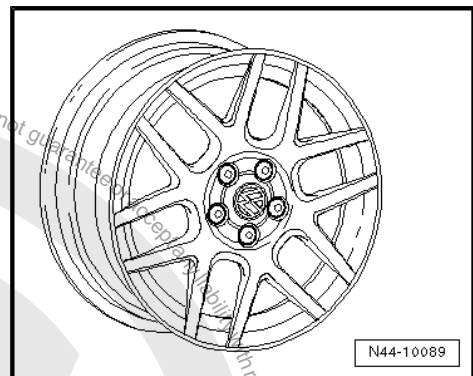

6Q0 601 025 AA - Wheel and tyre combination ⇒ page 139


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	43
Wheel load in kg:	480

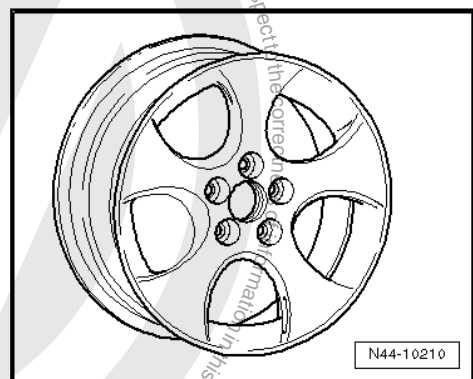



6Q0 601 025 C - Wheel and tyre combination ⇒ page 139

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	43
Wheel load in kg:	480

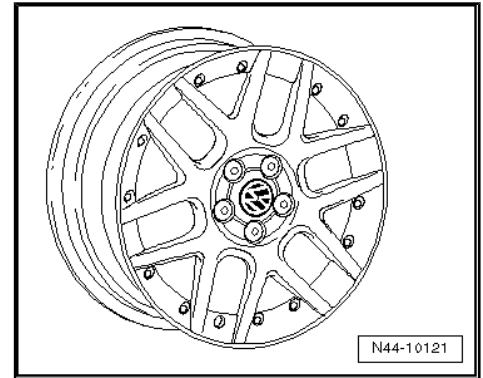

22.2.4 7 J x 17 offset 38


! Caution
Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 139 .

! WARNING

- ◆ *Vehicles with 4 doors: curtain and side airbags may not be installed or must be deactivated.*
- ◆ *205/40 R 17 84W tyres on 7 J x 17 wheels with offset 38 are only possible in combination with widened wheel housings (FLAPS)!*


1J0 601 025 S - Wheel and tyre combination ⇒ page 140

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	580

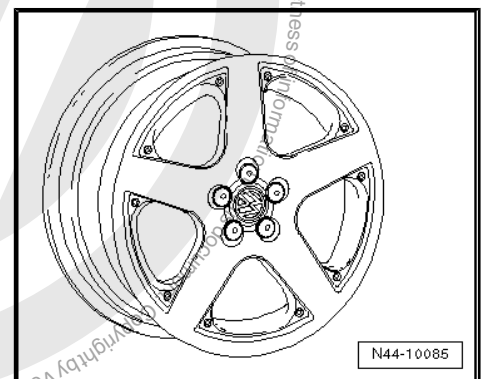

1J0 601 025 AB - Wheel and tyre combination ⇒ page 140

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

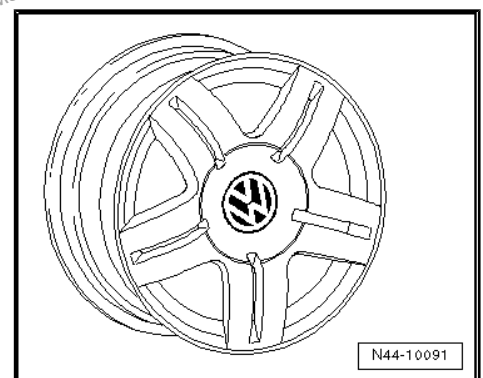



22.2.5 7¹/₂ J x 17 offset 38



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 139](#) .





WARNING

- ◆ Vehicles with 4 doors: curtain and side airbags may not be installed or must be deactivated.
- ◆ 205/40 R 17 84W tyres on 7¹/₂ J x 17 wheels with offset 38 are only possible in combination with widened wheel housings (FLAPS)!

1J0 601 025 BC - Wheel and tyre combination ⇒ [page 140](#)

Size:	7 ¹ / ₂ J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

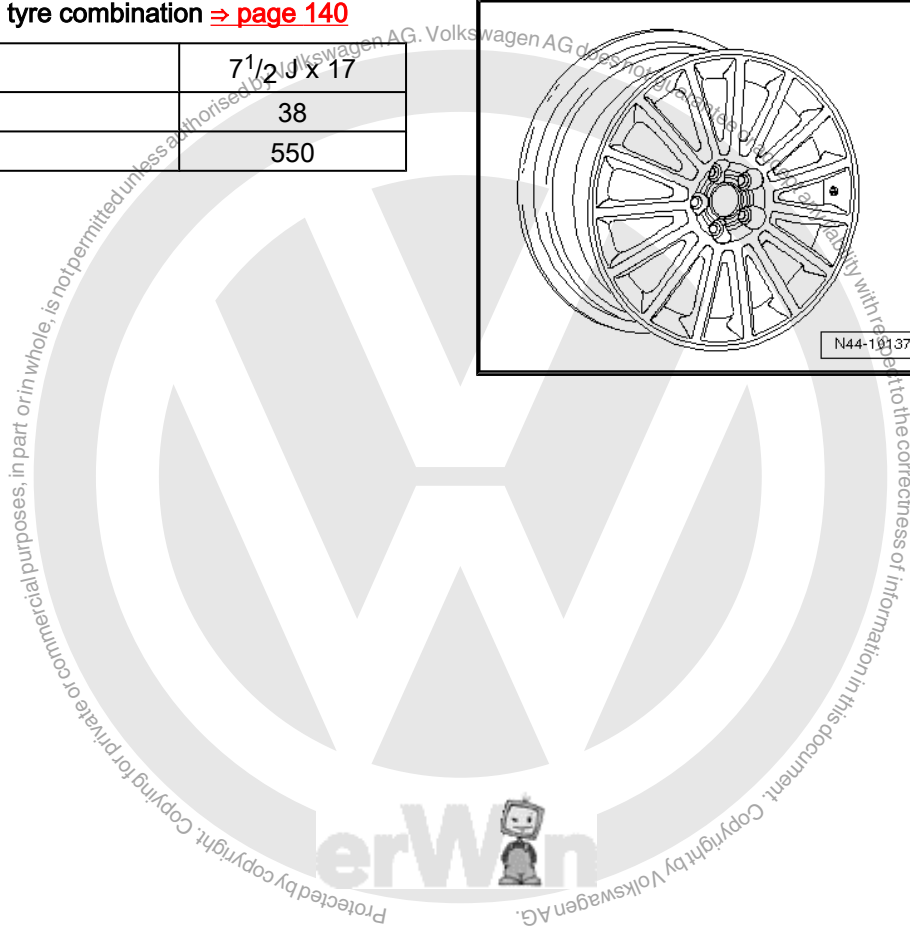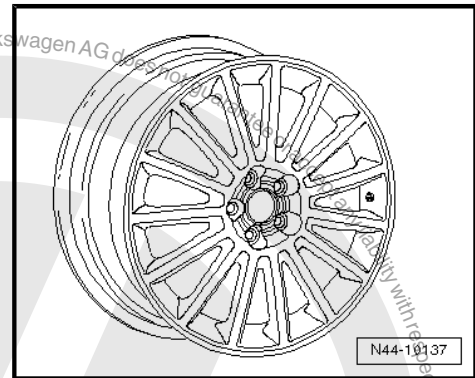



23 Polo GTI Cup Edition from model year 2007

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of only genuine Volkswagen spare parts. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

23.1 Polo GTI Cup Edition, type 9N model year 2007 to model year 2009

Attachment to parts certificate 3879/08

The parts certificate can be found on the Volkswagen ServiceNet under Technology; Guides; Wheels and Tyres Guide.

Type approval number: e1*2001/116*0174*18 to e1*2001/116*0174*25

Overview

Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
1.8l 132 kW petrol engine	Standard tyres	205/40 R 17 84W * ⇒ page 146	7 1/2 J x 17 ⇒ page 149	38	No	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
	Modification	205/45 R 16 83W	6 ¹ / ₂ J x 16 ⇒ page 147	43	No	Tyre makes recommended by Volkswagen: ♦ Summer tyres ⇒ page 463 ♦ Winter tyres ⇒ page 491 * Vehicles with 4 doors: curtain and side airbags may not be installed or must be deactivated.
		205/40 R17 84W * ⇒ page 146	7 J x 17 ⇒ page 148	38	No	
	Winter tyres	205/45 R 16 83Q/T/H	6 ¹ / ₂ J x 16 ⇒ page 146	42	Yes	
		205/45 R 16 83Q/T/H	6 ¹ / ₂ J x 16 ⇒ page 147	43	No	

Tyre inflation pressures are located on a sticker on inside of fuel tank flap or in ⇒ Maintenance ; Booklet ; Check tyres: condition, profile, inflation pressure, depth of tread

23.2 Wheel allocation for Polo GTI Cup Edition, type 9N model year 2007 to model year 2009

Explanation of information on wheels ⇒ [page 57](#)

Torque specifications for wheel bolts ⇒ Running gear, axles, steering; Rep. gr. 44 ; Fitting wheels and tyres; Fitting wheels

Pitch circle diameter: 100 mm

Number of wheel bolt holes: 5

23.2.1 6¹/₂ J x 16 offset 42




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 145](#) .

1J0 601 027 R, 1J0 601 027 AD - Wheel and tyre combination
⇒ [page 146](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

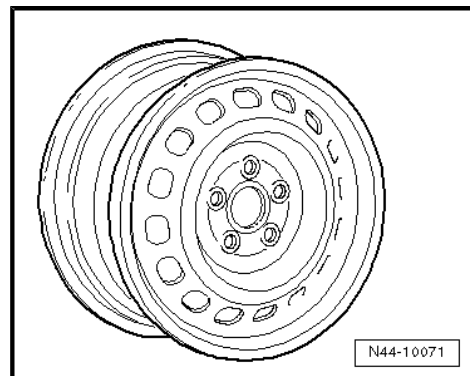



23.2.2 6¹/₂ J x 16 offset 43




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 145](#).


6Q0 601 025 D - Wheel and tyre combination ⇒ [page 146](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	43
Wheel load in kg:	475

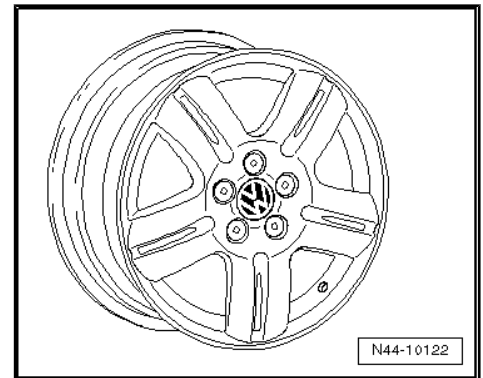


6Q0 601 025 S - Wheel and tyre combination ⇒ [page 146](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	43
Wheel load in kg:	480

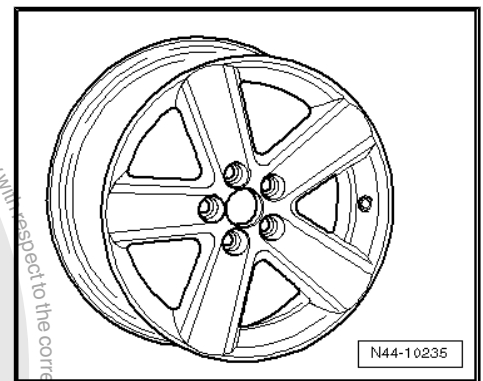


6Q0 601 025 T - Wheel and tyre combination ⇒ [page 146](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	43
Wheel load in kg:	480

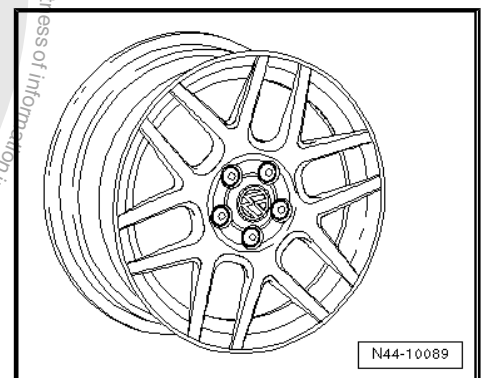

6Q0 601 025 AA - Wheel and tyre combination ⇒ [page 146](#)


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	43
Wheel load in kg:	480

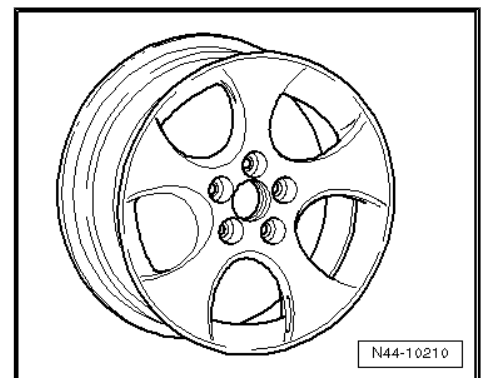



6Q0 601 025 C - Wheel and tyre combination ⇒ page 146

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	43
Wheel load in kg:	480

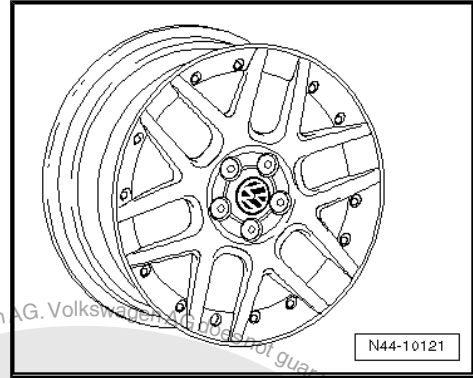

23.2.3 7 J x 17 offset 38



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 145 .




WARNING

- ◆ *Vehicles with 4 doors: curtain and side airbags may not be installed or must be deactivated.*
- ◆ *205/40 R 17 84W tyres on 7 J x 17 wheels with offset 38 are only possible in combination with widened wheel housings (FLAPS)!*


1J0 601 025 S - Wheel and tyre combination ⇒ page 146

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	580

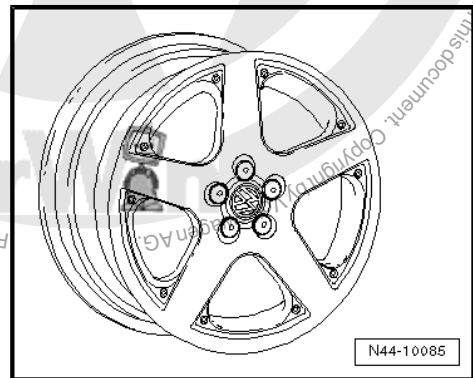

1J0 601 025 AB - Wheel and tyre combination ⇒ page 146

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

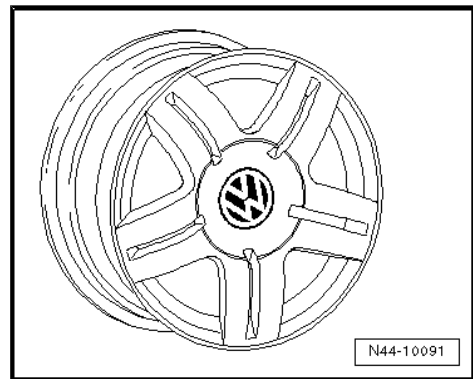



23.2.4 7¹/₂ J x 17 offset 38



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 145](#).





WARNING

- ◆ *Vehicles with 4 doors: curtain and side airbags may not be installed or must be deactivated.*
- ◆ *205/40 R 17 84W tyres on 7¹/₂ J x 17 wheels with offset 38 are only possible in combination with widened wheel housings (FLAPS)!*

1J0 601 025 BC - Wheel and tyre combination ⇒ [page 145](#)

Size:	7 ¹ / ₂ J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

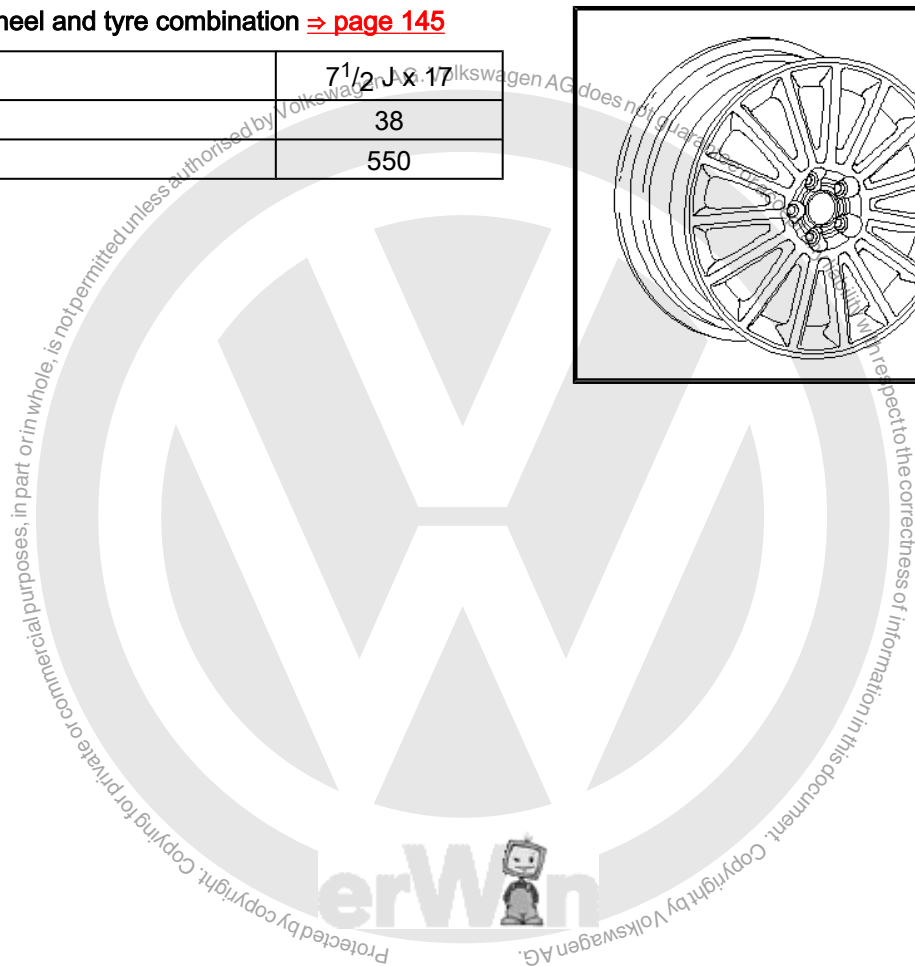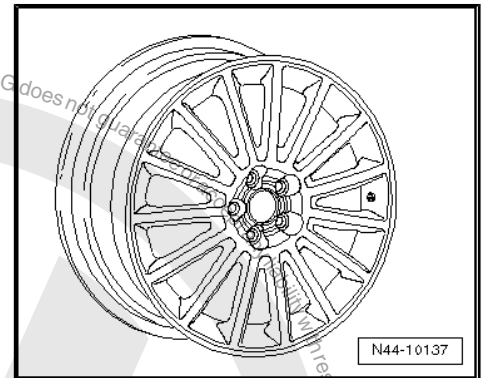



24 Polo saloon/sedan model year 2004 to model year 2005

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of genuine Volkswagen spare parts only. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to disc-type wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

24.1 Polo saloon/sedan, type 9N model year 2004 to model year 2005

Attachment to parts certificate 1900/05

Type Approval No.: e1*2001/116*0174*06 to e1*2001/116*0174*11

Overview

Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
1.4l 55 kW petrol engine	Standard tyres	165/70 R 14 81T	5 J x 14 ⇒ page 152	35	Yes	
	Modification	185/60 R 14 82T/H	6 J x 14 ⇒ page 152	43	Yes	
		185/55 R 15 82T/H	6 J x 15 ⇒ page 154	43	Yes	
		195/50 R 15 82H	6 J x 15 ⇒ page 154	43	No	



Model engine output	Tyres	Tyre size	Wheel	Offset in mm	Snow chains	Remarks
		195/55 R 15 85H/V	6 J x 15 ⇒ page 154	43	No	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17
		205/45 R 16 83V/W	6 1/2 J x 16 ⇒ page 155	43	No	
	Winter tyres	165/70 R 14 81Q	5 J x 14 ⇒ page 152	35	Yes	Tyre makes recommended by Volkswagen:
1.4l 55 kW 1.9l 47 kW diesel engines	Standard tyres	195/55 R15 85V	6 J x 15 ⇒ page 154	43	No	◆ Summer tyres ⇒ page 459 ◆ All-season tyres ⇒ page 482 ◆ Winter tyres ⇒ page 491
	Modification	185/60 R 14 82T/H	6 J x 14 ⇒ page 152	43	Yes	
		185/55 R 15 82T/H	6 J x 15 ⇒ page 154	43	Yes	
		195/50 R 15 82H	6 J x 15 ⇒ page 154	43	No	
		195/55 R 15 85H/V	6 J x 15 ⇒ page 154	43	No	
		205/45 R 16 83V/W	6 1/2 J x 16 ⇒ page 155	43	No	
	Winter tyres	185/60 R 14 82Q	6 J x 14 ⇒ page 152	43	Yes	
		185/55 R 15 82T/H	6 J x 15 ⇒ page 154	43	Yes	
1.4l 74 kW petrol engine	Standard tyres	185/60 R 14 82H	6 J x 14 ⇒ page 152	43	Yes	
	Modification	185/55 R 15 82H	6 J x 15 ⇒ page 154	43	Yes	
		195/50 R 15 82H/V	6 J x 15 ⇒ page 154	43	No	
		195/55 R 15 85H/V	6 J x 15 ⇒ page 154	43	No	
		205/45 R 16 83V/W	6 1/2 J x 16 ⇒ page 155	43	No	



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
	Winter tyres	185/60 R 14 82Q	6 J x 14 ⇒ page 152	43	Yes	
		185/55 R 15 82T/H	6 J x 15 ⇒ page 154	43	Yes	

Tyre pressures can be found on the inside of the fuel tank flap or in ⇒ Maintenance ; Booklet 15.1 .

24.2 Wheel allocation Polo saloon/sedan, type 9N model year 2004 to model year 2005

Explanation of information on wheels ⇒ [page 57](#)

Torque specifications for wheel bolts ⇒ Running gear, axles, steering; Rep. gr. 44 ; Fitting wheels and tyres; Fitting wheels

Pitch circle diameter 100 mm

Number of wheel bolt holes: 5

24.2.1 5 J x 14




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 150](#) .

6Q0 601 027 H - Wheel and tyre combination ⇒ [page 150](#)

Factory equipment only; not available as replacement part

Size:	5 J x 14
Wheel offset in mm:	35
Wheel load in kg:	465

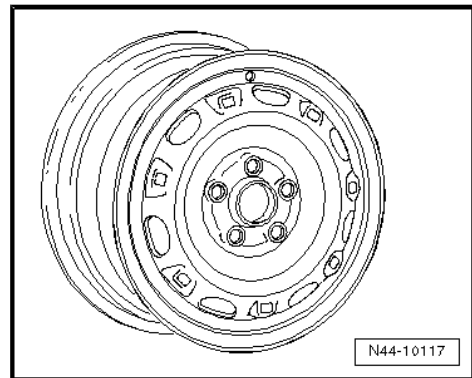

24.2.2 6 J x 14



Caution


Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 150](#) .



Factory equipment only; not available as replacement part


6Q0 601 027 A - Wheel and tyre combination ⇒ [page 150](#)

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	450

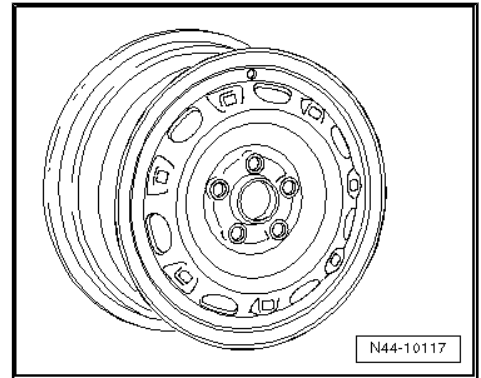

6Q0 601 027 F - Wheel and tyre combination ⇒ [page 150](#)

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	465

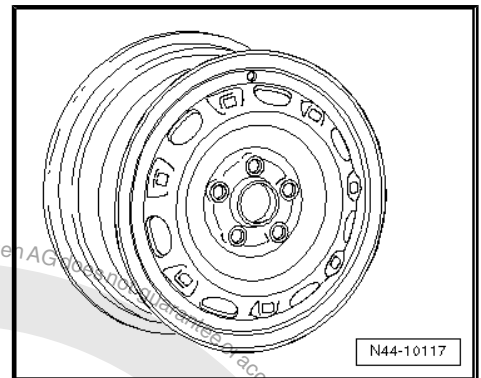


Not factory equipment, but available as replacement parts

6Q0 601 025 Q - Wheel and tyre combination ⇒ [page 150](#)

Not factory equipment, but available as replacement part


Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	465

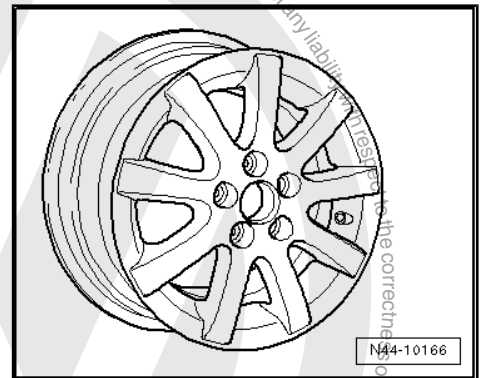

6Q0 601 025 K - Wheel and tyre combination ⇒ [page 150](#)

Not factory equipment, but available as replacement part

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	465

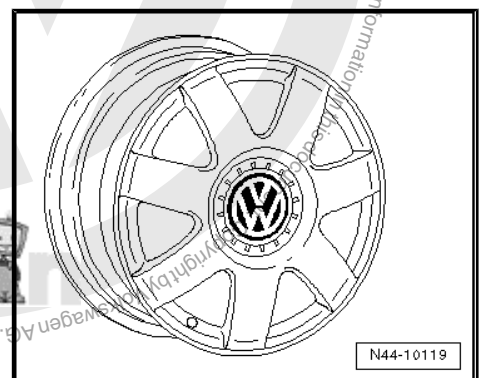



24.2.3 6 J x 15




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 150](#) .

Factory equipment only; not available as replacement part


6QE 601 025 - Wheel and tyre combination ⇒ [page 151](#)

Size:	6 J x 15
Wheel offset in mm:	43
Wheel load in kg:	475

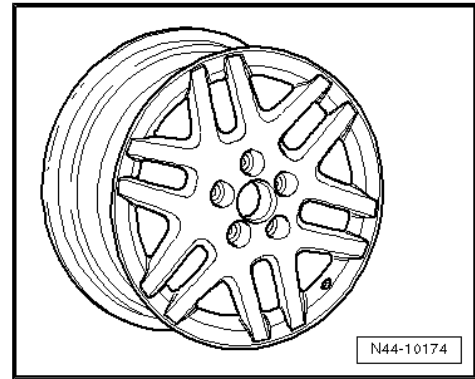

6Q0 601 027 G - Wheel and tyre combination ⇒ [page 150](#)


Size:	6 J x 15
Wheel offset in mm:	43
Wheel load in kg:	500

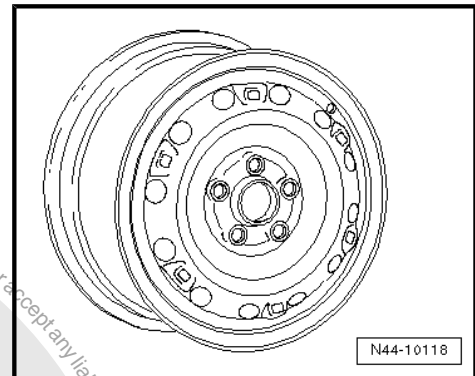

6Q0 601 025 L - Wheel and tyre combination ⇒ [page 150](#)

Not factory equipment, but available as replacement part

Size:	6 J x 15
Wheel offset in mm:	43
Wheel load in kg:	475

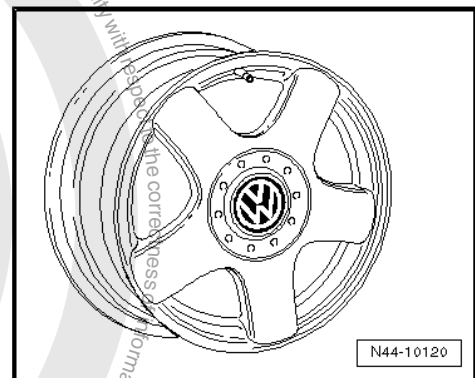




6Q0 601 025 R - Wheel and tyre combination ⇒ page 150

Not factory equipment, but available as replacement part

Size:	6 J x 15
Wheel offset in mm:	43
Wheel load in kg:	480

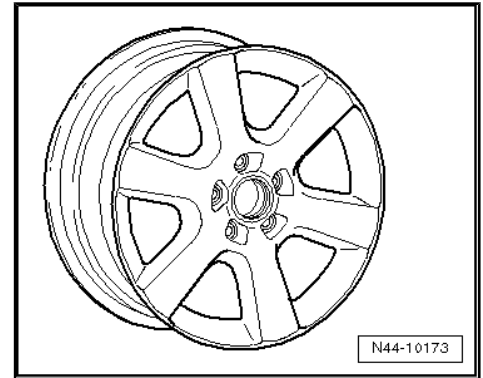

24.2.4 6¹/₂ J x 16




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 150 .

Not factory equipment, but available as replacement parts


6Q0 601 025 C - Wheel and tyre combination ⇒ page 151

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	43
Wheel load in kg:	480

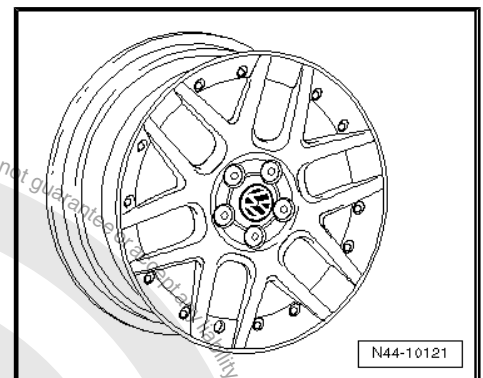

6Q0 601 025 D - Wheel and tyre combination ⇒ page 151


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	43
Wheel load in kg:	475

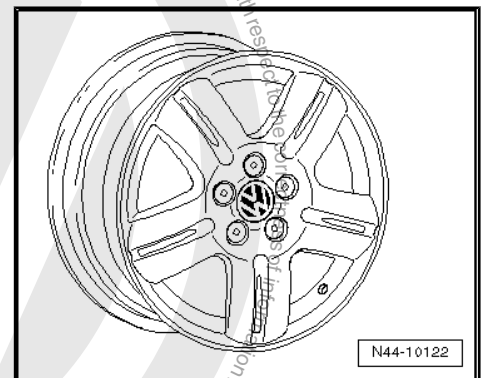



6Q0 601 025 T - Wheel and tyre combination ⇒ [page 151](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	43
Wheel load in kg:	480

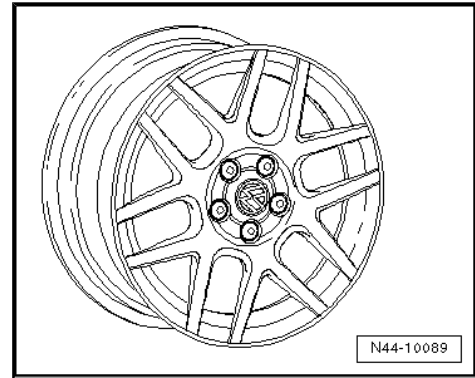




25 Golf model year 1992 to model year 1998

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of genuine Volkswagen spare parts only. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.




WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to disc-type wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

25.1 Golf type 1HX0, Golf Syncro 1HX1, Golf type 1H

Appendix 2 to Parts Certificate 1479/00

Golf, type 1HX0 from model year 1992 to model year 1997

General type approval No.: F 804

Golf, type 1HX1 from model year 1992 to model year 1997

General type approval No.: G 156

Golf, type 1H model year 1998

Type Approval No. e1*96/79*0068*00 to e1*96/79*0068*03

Overview

Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
Golf 44 kW, 47 kW, 55 kW, 66 kW petrol engine;	Standard tyres	175/70 R 13 82T	5 1/2 J x 13 page 161	38	Yes	



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
55 kW TD and GTD; Golf Eco-matic and 55 kW with automatic to 12.94	Modification	175/70 R 13 82S	5 1/2 J x 13 ⇒ page 161	38	Yes	
		175/65 R 14 82S	6 J x 14 ⇒ page 162	43/4 5	Yes	
		185/60 R 14 82T	6 J x 14 ⇒ page 162	43/4 5	Yes	
		195/50 R 15 82H	6 J x 15 ⇒ page 165	45	Yes	
	Winter tyres	175/70 R 13 82Q	5 1/2 J x 13 ⇒ page 161	38	Yes	
Golf 44 kW, 47 kW, 55 kW petrol engine; 55 kW TD and GTD from 05.96 with ABS	Standard tyres	185/60 R 14 82S	6 J x 14 ⇒ page 162	43/4 5	Yes	175/70 R 13 82S/T are not permitted on vehicles from 05.96 with ABS and all vehicles with GT equipment!
	Modification	175/65 R 14 82S	6 J x 14 ⇒ page 162	43/4 5	Yes	
		185/60 R 14 82T	6 J x 14 ⇒ page 162	43/4 5	Yes	
		195/50 R 15 82H	6 J x 15 ⇒ page 165	45	Yes	
	Winter tyres	175/65 R 14 82S	6 J x 14 ⇒ page 162	43/4 5	Yes	General information on: ♦ Winter tyres ⇒ page 14 ♦ Snow chains ⇒ page 17
Golf 66 kW CL, GL to 12.94	Standard tyres	175/70 R 13 82T	5 1/2 J x 13 ⇒ page 161	38	Yes	Tyre makes recommended by Volkswagen: ♦ Summer tyres ⇒ page 463 ♦ All-season tyres ⇒ page 482 ♦ Winter tyres ⇒ page 492
	Modification	185/60 R 14 82T	6 J x 14 ⇒ page 162	43/4 5	Yes	
		195/50 R 15 82H	6 J x 15 ⇒ page 165	45	Yes	
		Winter tyres	175/70 R 13 82Q	5 1/2 J x 13 ⇒ page 161	38	



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
Golf Syn- cro; 66 kW, 66 kW GT to 12.94	Standard tyres	185/60 R 14 82H	6 J x 14 ⇒ page 162	43/4 5	Yes	Syn- cro vehicles: Snow chains are per- mitted on the front wheels only.
	Modification	175/70 R 13 82T	5 ¹ / ₂ J x 13 ⇒ page 161	38	Yes	
		185/60 R 14 82T	6 J x 14 ⇒ page 162	43/4 5	Yes	
		195/50 R 15 82H	6 J x 15 ⇒ page 165	45	Yes	
	Winter tyres	175/70 R 13 82Q	5 ¹ / ₂ J x 13 ⇒ page 161	38	Yes	
Golf Syn- cro; 66 kW CL, GL from 01.95; 66 kW TDI	Standard tyres	185/60 R 14 82T	6 J x 14 ⇒ page 162	43/4 5	Yes	
	Modification	195/60 R 14 85H	6 J x 14 ⇒ page 162	43/4 5	Yes	
		195/50 R 15 82H	6 J x 15 ⇒ page 165	45	Yes	
	Winter tyres	175/65 R 14 82Q	6 J x 14 ⇒ page 162	43/4 5	Yes	
Golf 55 kW, 66 kW, 66 kW GT and Golf Ecomatic from 01.95	Standard tyres	185/60 R 14 82T	6 J x 14 ⇒ page 162	43/4 5	Yes	
	Modification	195/50 R 15 82H	6 J x 15 ⇒ page 165	45	Yes	
	Winter tyres	175/65 R 14 82Q	6 J x 14 ⇒ page 162	43/4 5	Yes	
all 74 kW; 85 kW CL, GL; 81 kW TDI CL, GL	Standard tyres	185/60 R 14 82H	6 J x 14 ⇒ page 162	43/4 5	Yes	
	Modification	195/50 R 15 82H	6 J x 15 ⇒ page 165	45	Yes	
	Winter tyres	175/65 R 14 82Q	6 J x 14 ⇒ page 162	43/4 5	Yes	
85 kW GTI; 81 kW TDI GTI	Standard tyres	195/50 R 15 82V	6 J x 15 ⇒ page 165	38	Yes	
	Modification	195/50 R 15 82H	6 J x 15 ⇒ page 165	38	Yes	
		195/50 R 15 82H	6 ¹ / ₂ J x 15 ⇒ page 167	43	Yes	



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks	
		205/50 R 15 82H	6 ¹ / ₂ J x 15 ⇒ page 167	43	Yes		
		215/40 R 16 82V	7 J x 16 ⇒ page 170	43	No		
	Winter tyres	185/55 R 15 81T	6 J x 15 ⇒ page 165	38	Yes		Vehicles to 12.94
		185/55 R 15 81T	6 J x 15 ⇒ page 165	35	Yes		Vehicles from 01.95
110 kW GTI 16V	Standard tyres	205/50 R 15 86V	6 J x 15 ⇒ page 165	38	Yes		
	Modification	195/50 R 15 82V	6 J x 15 ⇒ page 165	38	Yes		
		195/50 R 15 82V	6 ¹ / ₂ J x 15 ⇒ page 167	43	Yes		
		215/40 R 16 82V	7 J x 16 ⇒ page 170	43	No		
	Winter tyres	185/55 R 15 81T	6 J x 15 ⇒ page 165	38	Yes		Vehicles to 12.94
		185/55 R 15 81T	6 J x 15 ⇒ page 165	35	Yes		Vehicles from 01.95
128 kW VR6	Standard tyres	205/50 R 15 86V	6 ¹ / ₂ J x 15 ⇒ page 167	43	Yes		
	Modification	215/40 R 16 86W reinforced	7 J x 16 ⇒ page 170	43	No		
	Winter tyres	185/55 R 15 81T reinforced	6 J x 15 ⇒ page 165	38	Yes		Vehicles to 12.94
		185/55 R 15 81T reinforced	6 J x 15 ⇒ page 165	35	Yes		Vehicles from 01.95
128 kW VR6	Standard tyres	205/50 R 15 86W	6 ¹ / ₂ J x 15 ⇒ page 167	43	Yes	Syncro vehicles:	
Syncro 140 kW	Modification	205/50 ZR 15 86W reinforced	6 ¹ / ₂ J x 15 ⇒ page 167	43	Yes	Snow chains may be fitted on the front wheels only!	
	Winter tyres	185/55 R 15 81T reinforced	6 J x 15 ⇒ page 165	35	Yes		

Tyre pressures can be found on the inside of the fuel tank flap or in ⇒ Maintenance ; Booklet 35 .



25.2 Wheel allocation for Golf type 1HX0, Golf Syncro 1HX1, Golf type 1H

Golf, type 1HX0 from model year 1992 to model year 1997

Golf Syncro, type 1HX1 from model year 1992 to model year 1997

Golf, type 1H model year 1998

Explanation of information on wheels ⇒ [page 57](#)

Torque specifications for wheel bolts ⇒ Running gear; Rep. gr. 40 ; Repairing front suspension (basic running gear); Removing and installing wheel bearing, strut, drive shaft (basic suspension) or ⇒ Running gear; Rep. gr. 40 ; Repairing front suspension (plus running gear); Removing and installing wheel bearing, strut (plus running gear)

Pitch circle diameter: 100 mm

25.2.1 5¹/₂ J x 13




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 157](#) .

Golf to 55 kW CL, GL with manual gearbox (front-wheel drive)

191 601 025 D - Wheel and tyre combination ⇒ [page 157](#)


Size:	5 ¹ / ₂ J x 13
Wheel offset in mm:	38
Wheel load in kg:	410
Number of wheel bolt holes:	4

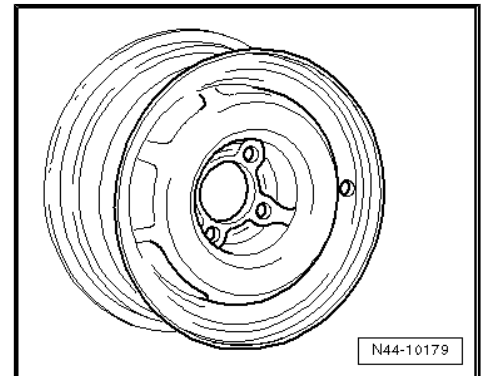

Golf to 66 kW CL, GL with petrol and diesel engines, Golf Syncro 66 kW to 12.94

1H0 601 025 A - Wheel and tyre combination ⇒ [page 157](#)


Size:	5 ¹ / ₂ J x 13
Wheel offset in mm:	38
Wheel load in kg:	450
Number of wheel bolt holes:	4

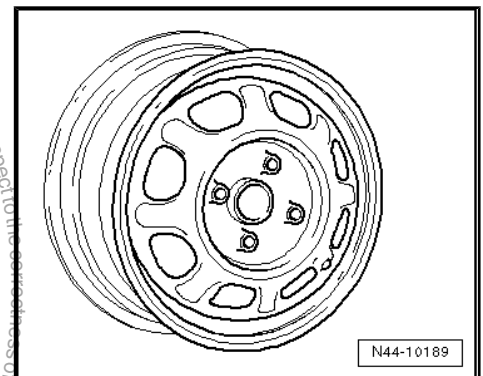



321 601 025 J/M - Wheel and tyre combination ⇒ page 157

Size:	5 ¹ / ₂ J x 13
Wheel offset in mm:	38
Wheel load in kg:	460
Number of wheel bolt holes:	4

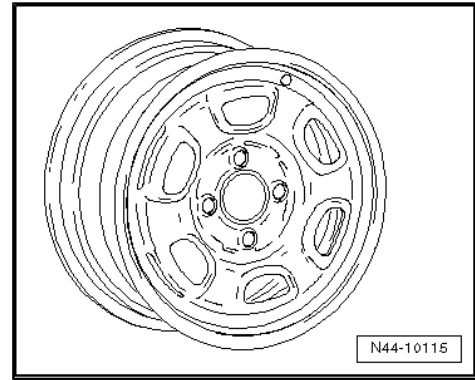

25.2.2 6 J x 14

Golf to 85 kW CL, GL, Golf 66 kW GT, Golf Syncro 66 kW



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 157 .


811 601 025 P - Wheel and tyre combination ⇒ page 159



Note


This rim is allowed only for vehicles with a maximum permitted axle load of 880 kg.

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	440
Number of wheel bolt holes:	4

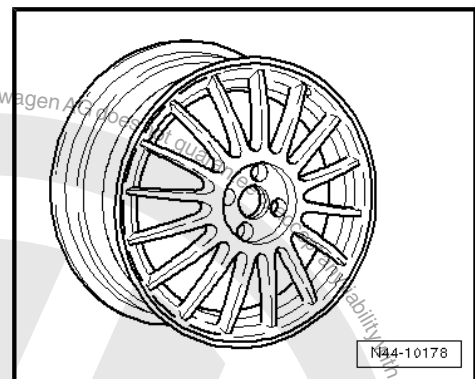

1H0 601 025 D - Wheel and tyre combination ⇒ page 159


Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	450
Number of wheel bolt holes:	4

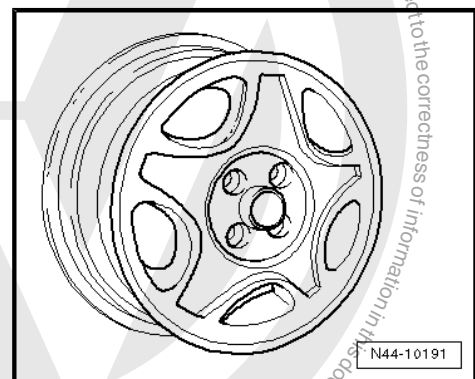




1H0 601 025 AE - Wheel and tyre combination ⇒ page 159

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	480
Number of wheel bolt holes:	4

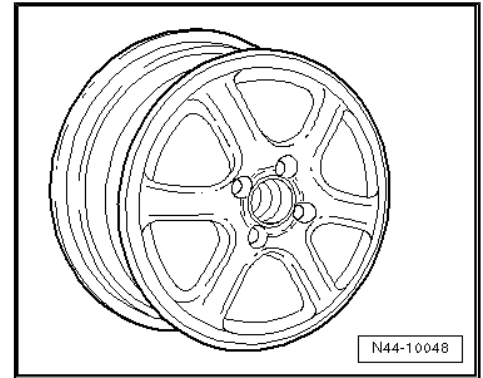


1H0 601 027 - Wheel and tyre combination ⇒ page 159

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	500
Number of wheel bolt holes:	4

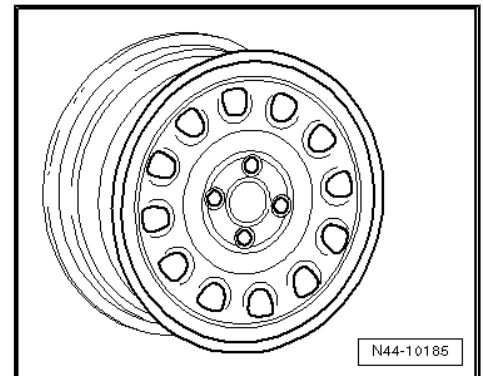

1H0 601 027 A - Wheel and tyre combination ⇒ page 159

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	500
Number of wheel bolt holes:	4

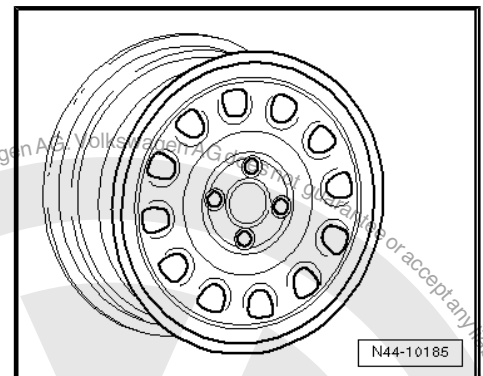


Golf to 85 kW, petrol and diesel engine CL, GL, Golf 66 kW GT, all Golf Syncro 66 kW

Not for „20 Years GTI“ special models

1H0 601 025 P - Wheel and tyre combination ⇒ page 158

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	460
Number of wheel bolt holes:	4

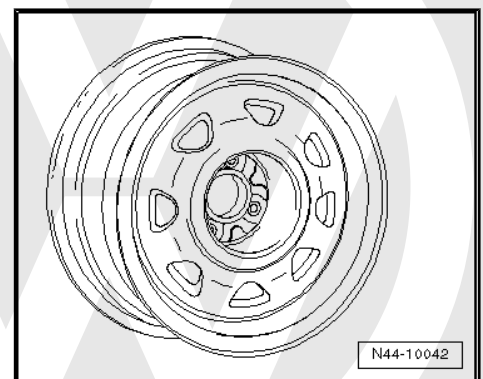


Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by Volkswagen AG. Volkswagen AG does not accept any liability with respect to the correctness of information in this document. Copyright by Volkswagen AG.




1HM 601 025 - Wheel and tyre combination ⇒ page 158

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	460
Number of wheel bolt holes:	4

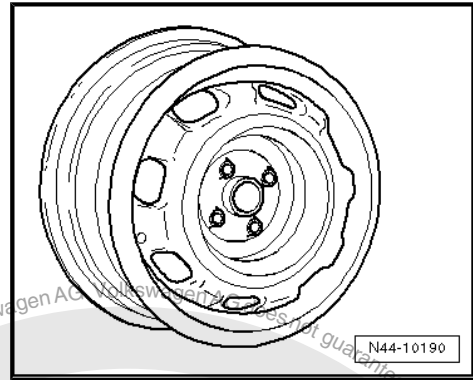


1H0 601 025 B - Wheel and tyre combination ⇒ page 158

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	460
Number of wheel bolt holes:	4

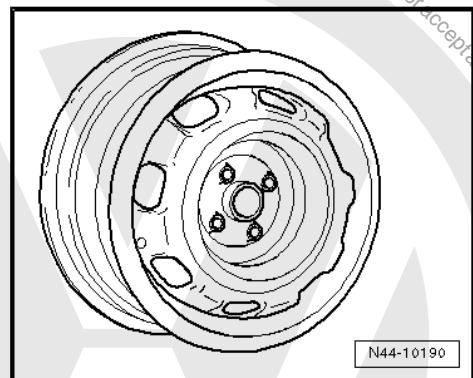


1H0 601 027 A - Wheel and tyre combination ⇒ page 158

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	500
Number of wheel bolt holes:	4

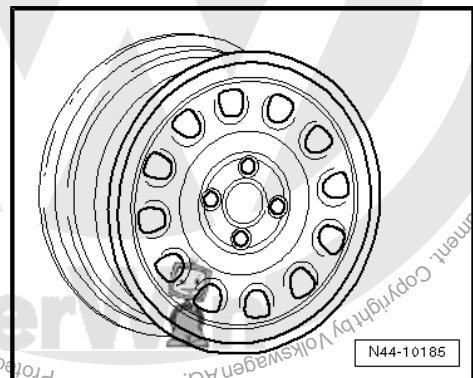

1H0 601 025 R - Wheel and tyre combination ⇒ page 158

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	500
Number of wheel bolt holes:	4

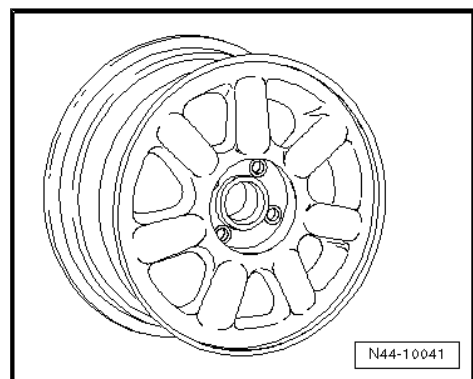



25.2.3 6 J x 15

Golf to 85 kW CL, GL, Golf 66 kW GT, Golf Syncro 66 kW




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 157](#) .


1H0 601 025 E - Wheel and tyre combination ⇒ [page 159](#)

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	450
Number of wheel bolt holes:	4

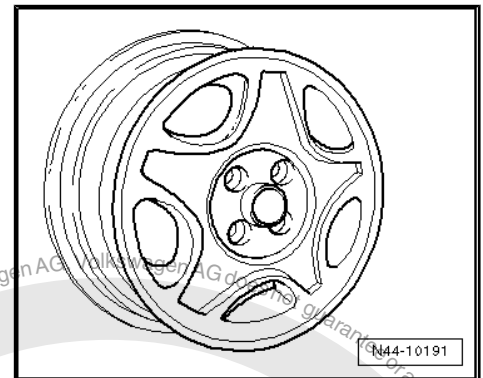


1H0 601 025 L - Wheel and tyre combination ⇒ [page 159](#)

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	450
Number of wheel bolt holes:	4

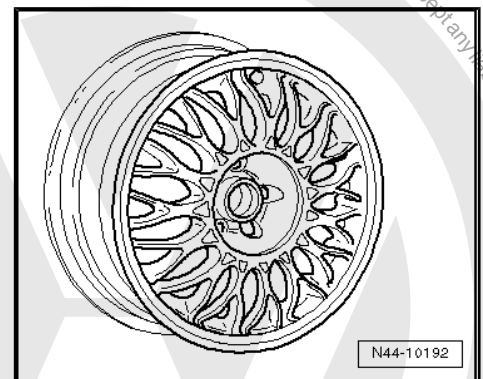

1H0 601 025 Q - Wheel and tyre combination ⇒ [page 159](#)

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	450
Number of wheel bolt holes:	4

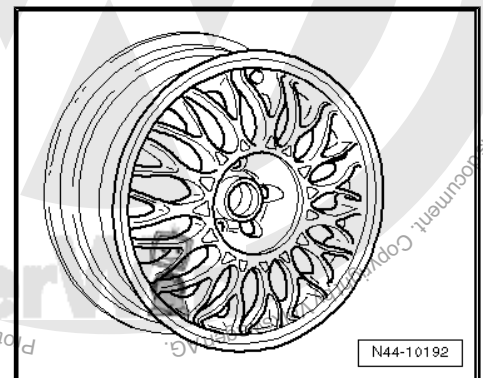




1H0 601 025 AD - Wheel and tyre combination ⇒ page 159

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	460
Number of wheel bolt holes:	4


Golf to 85 kW, petrol and diesel engine CL, GL, Golf 66 kW GT, all Golf Syncro 66 kW

Not for „20 Years GTI“ special models

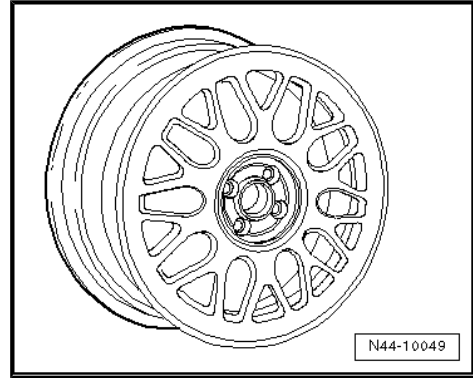

1H0 601 025 AD - Wheel and tyre combination ⇒ page 158


Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	460
Number of wheel bolt holes:	4

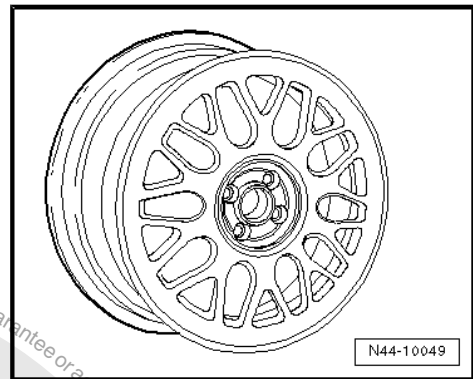

1H0 601 025 AE - Wheel and tyre combination ⇒ page 158

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	480
Number of wheel bolt holes:	4


Golf GTI 85 kW, Golf GTI 16V

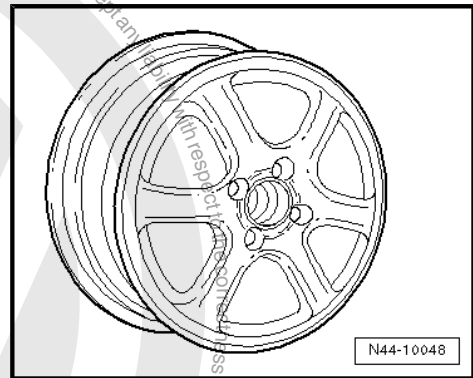

1H0 601 025 J - Wheel and tyre combination ⇒ page 159

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	530
Number of wheel bolt holes:	5

Golf GTI 85 kW, Golf GTI 16V, Golf VR6 to 12.94, Golf VR6 Syncro to 12.94

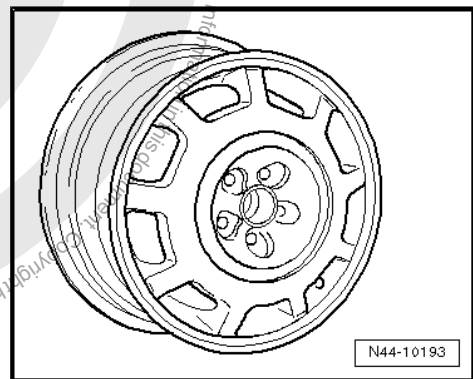




1H0 601 025 K - Wheel and tyre combination ⇒ page 159


Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	490
Number of wheel bolt holes:	5

Golf GTI 85 kW, Golf GTI 16V, Golf VR6, Golf VR6 Syncro



Caution


Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 157 .

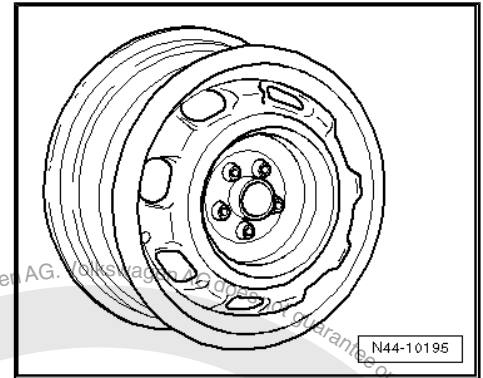

3A0 601 027 - Wheel and tyre combination ⇒ page 160

Possible for snow tyres.

Size:	6 J x 15
Wheel offset in mm:	35
Wheel load in kg:	530
Number of wheel bolt holes:	5

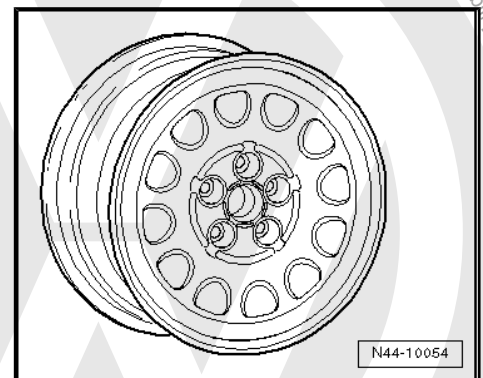

25.2.4 6¹/₂ J x 15


Golf GTI 85 kW, Golf GTI 16V Golf VR6 to 12.94, Golf VR6 Syncro to 12.94

1H0 601 025 F - Wheel and tyre combination ⇒ page 159

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	43
Wheel load in kg:	490
Number of wheel bolt holes:	5


Golf GTI 85 kW, Golf GTI 15V with 280 mm diameter brake disc on the front axle

Golf VR6, Golf VR6 Syncro with 280 mm diameter brake disc on the front axle

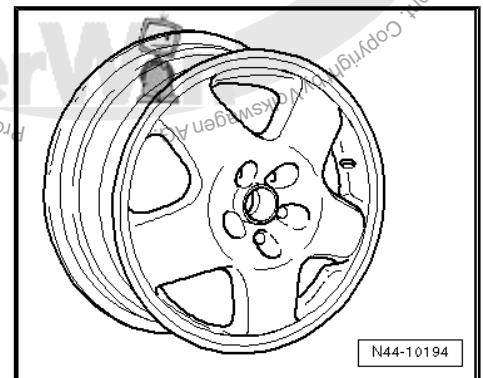

1H0 601 025 N - Wheel and tyre combination ⇒ page 159


Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	43
Wheel load in kg:	490
	5

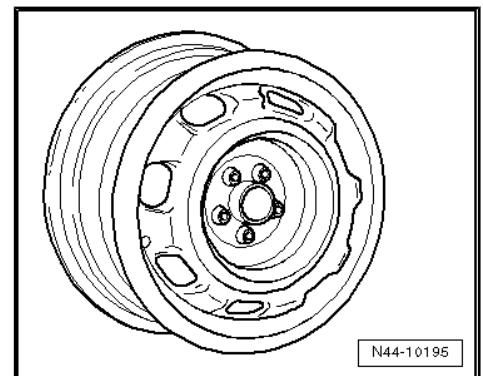




1H0 601 025 M - Wheel and tyre combination ⇒ page 159

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	43
Wheel load in kg:	490
Number of wheel bolt holes:	5

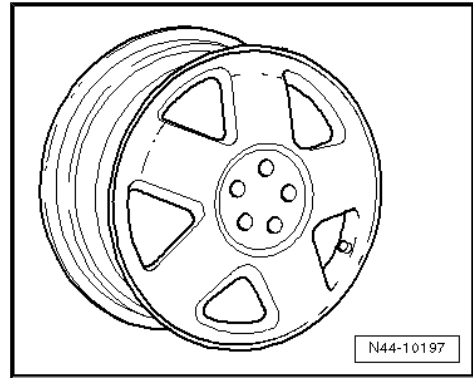


535 601 025 D - Wheel and tyre combination ⇒ page 159

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	43
Wheel load in kg:	510
Number of wheel bolt holes:	5

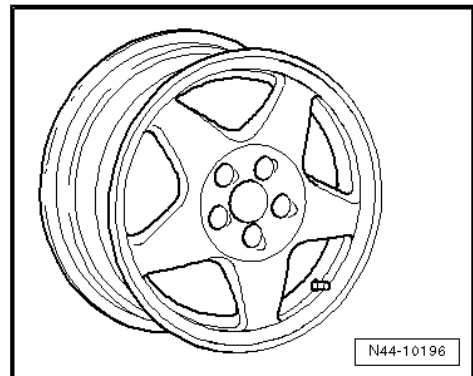

1H0 601 025 G - Wheel and tyre combination ⇒ page 159


Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	43
Wheel load in kg:	490
Number of wheel bolt holes:	5

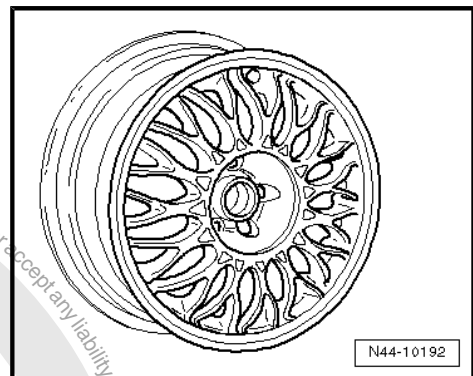

Golf GTI 85 kW, Golf GTI 16V, Golf VR6, Golf VR6 Syncro

1H0 601 025 AA - Wheel and tyre combination ⇒ page 159


Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	43
Wheel load in kg:	500
Number of wheel bolt holes:	5

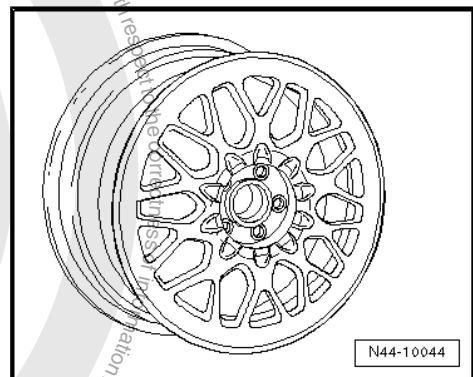




1H0 601 025 S- Wheel and tyre combination ⇒ page 159

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	43
Wheel load in kg:	490
Number of wheel bolt holes:	5

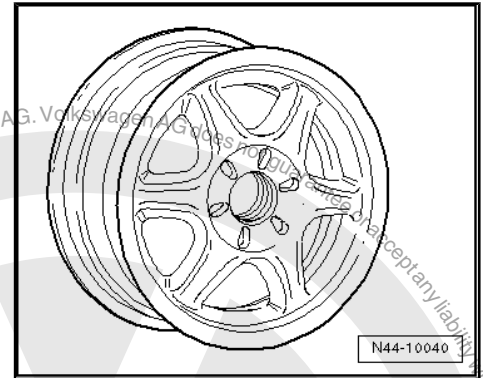


1H0 601 025 AB - Wheel and tyre combination ⇒ page 159

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	43
Wheel load in kg:	510
Number of wheel bolt holes:	5

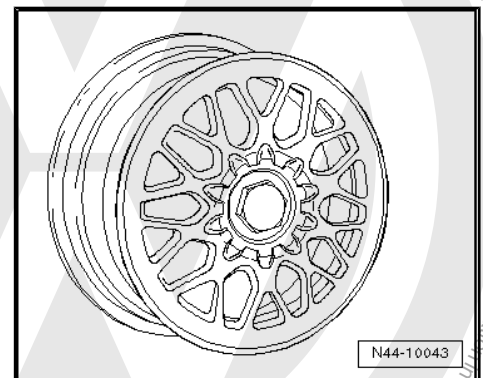


1H0 601 025 T - Wheel and tyre combination ⇒ page 159

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	43
Wheel load in kg:	490
Number of wheel bolt holes:	5

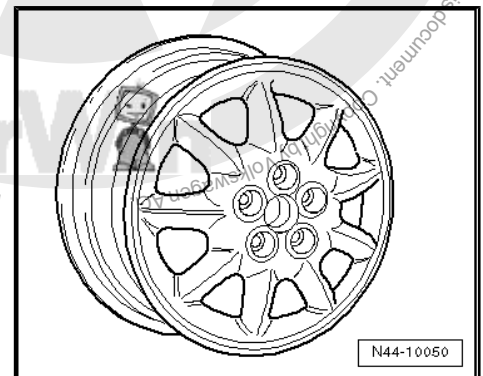

1H0 601 025 AF - Wheel and tyre combination ⇒ page 159


Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	43
Wheel load in kg:	490
Number of wheel bolt holes:	5

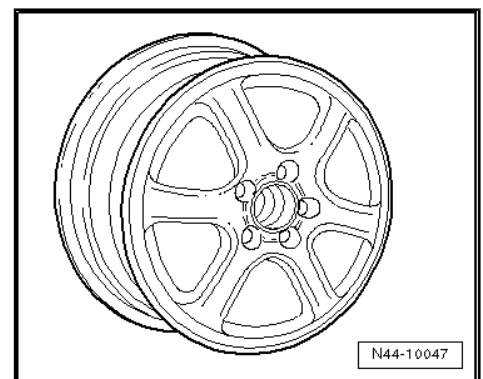



1H0 601 025 AG - Wheel and tyre combination ⇒ [page 159](#)

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	43
Wheel load in kg:	500
Number of wheel bolt holes:	5

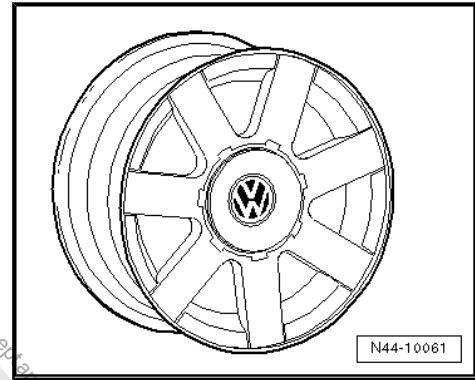

25.2.5 7 J x 16

Golf GTI 85 kW, Golf GTI 16V, Golf VR6

All special models „20 Years GTI“




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 157](#) .

1H0 601 025 AH - Wheel and tyre combination ⇒ [page 160](#)

Size:	7 J x 16
Wheel offset in mm:	43
Wheel load in kg:	500
Number of wheel bolt holes:	5

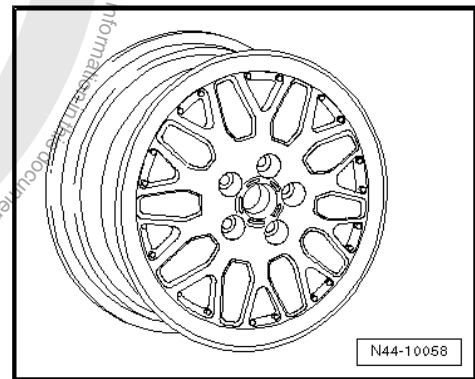



26 Golf model year 1998 to model year 2004, Golf R32, Golf Anniversary GTI

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of genuine Volkswagen spare parts only. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to disc-type wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

26.1 Golf, Golf 4Motion, type 1J model year 1998 to model year 2004

Appendix 2 to Parts Certificate 1958/04

Type Approval No.: e1*96/79*0071*00 to e1*96/79*0071*09

Type Approval No.: e1*98/14*0071*10 to e1*98/14*0071*30

Type Approval No.: e1*2001/116*0071*31 to e1*2001/116*0071*37

Overview

Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
1.4l 55 kW petrol engine;	Standard tyres to 12/01	175/80 R 14 88T	6 J x 14 ⇒ page 174	38	Yes	



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
1.9l 50 kW diesel engines	Standard tyres arom 01/02	195/65 R 15 91T	6 J x 15 ⇒ page 175	38	Yes	<p>General information on:</p> <ul style="list-style-type: none"> ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17 <p>Tyre makes recommended by Volkswagen:</p> <ul style="list-style-type: none"> ◆ Summer tyres ⇒ page 465 ◆ All-season tyres ⇒ page 482 ◆ Winter tyres ⇒ page 493
	Modification	195/65 R15 91T	6 J x 15 ⇒ page 175	38	Yes	
		205/55 R 16 91H	6 ¹ / ₂ J x 16 ⇒ page 179	42	No	
		225/45 R 17 91W	7 J x 17 ⇒ page 183	38	No	
	Winter tyres	175/80 R 14 88Q/T	6 J x 14 ⇒ page 174	38	Yes	
		205/55 R 16 91T/H	5 ¹ / ₂ J x 16 ⇒ page 178	36	Yes	
1.6l 74 kW, 75 kW, 77 kW petrol engines	Standard tyres	175/80 R 14 88H	6 J x 14 ⇒ page 174	38	Yes	<p>The 225/45 R 17 tyre may be mounted on the 7 J x 17 or the 7¹/₂ J x 17 rim only if the listed conditions ⇒ page 186 are fulfilled!</p> <p>The adhesive weights for balancing must be attached to the inner side of the rim of 6¹/₂ J x 16 aluminium wheels!</p> <p>4Motion vehicles: Snow chains are permitted on the front wheels only.</p>
	Modification	195/65 R 15 91H	6 J x 15 ⇒ page 175	38	Yes	
		205/55 R 16 91H	6 ¹ / ₂ J x 16 ⇒ page 179	42	No	
		225/45 R 17 91W	7 J x 17 ⇒ page 183	38	No	
		225/45 R 17 91W	7 ¹ / ₂ J x 17 ⇒ page 186	38	No	
	Winter tyres	175/80 R 14 88Q/T	6 J x 14 ⇒ page 174	38	Yes	
205/55 R 16 91T/H		5 ¹ / ₂ J x 16 ⇒ page 178	36	Yes		



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
1.9l 66 kW TDI	Standard tyres	195/65 R 15 91T	6 J x 15 ⇒ page 175	38	Yes	
	Modification	205/55 R 16 91H	6 ¹ / ₂ J x 16 ⇒ page 179	42	No	
		225/45 R 17 91W	7 J x 17 ⇒ page 183	38	No	
		225/45 R 17 91W	7 ¹ / ₂ J x 17 ⇒ page 186	38	No	
	Winter tyres	195/65 R 15 91Q/T	6 J x 15 ⇒ page 175	38	Yes	
		205/55 R 16 91T/H	5 ¹ / ₂ J x 16 ⇒ page 178	36	Yes	
1.9l 74 kW, 81 kW, 85 kW TDI; 2.0l 85 kW petrol engine; 1.6l 81 kW petrol engine	Standard tyres	195/65 R 15 91H	6 J x 15 ⇒ page 175	38	Yes	
	Modification	205/55 R 16 91H	6 ¹ / ₂ J x 16 ⇒ page 179	42	No	
		225/45 R 17 91W	7 J x 17 ⇒ page 183	38	No	
		225/45 R 17 91W	7 ¹ / ₂ J x 17 ⇒ page 186	38	No	
	Winter tyres	195/65 R 15 91Q/T	6 J x 15 ⇒ page 175	38	Yes	
		205/55 R 16 91T/H	5 ¹ / ₂ J x 16 ⇒ page 178	36	Yes	
1.8l 92 kW; 1.8l 110 kW; 2.3l 110 kW Petrol engines; 1.9l 96 kW TDI; 1.9l 110 kW TDI	Standard tyres	195/65 R 15 91V	6 J x 15 ⇒ page 175	38	Yes	
	Modification	205/55 R 16 91V	6 ¹ / ₂ J x 16 ⇒ page 179	42	No	
		225/45 R 17 91W	7 J x 17 ⇒ page 183	38	No	
		225/45 R 17 91W	7 ¹ / ₂ J x 17 ⇒ page 186	38	No	
	Winter tyres	195/65 R 15 91Q/T	6 J x 15 ⇒ page 175	38	Yes	
		205/55 R 16 91T/H	5 ¹ / ₂ J x 16 ⇒ page 178	36	Yes	



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
1.8l 132 kW; 2.3l 125 kW	Standard tyres	205/55 R 16 91W	6 ¹ / ₂ J x 16 ⇒ page 181	42	No	
	Modification	205/55 R 16 91V	6 ¹ / ₂ J x 16 ⇒ page 181	42	No	
		225/45 R 17 91W	7 J x 17 ⇒ page 183	38	No	
		225/45 R 17 91W	7 ¹ / ₂ J x 17 ⇒ page 186	38	No	
	Winter tyres	205/55 R 16 91T/H	5 ¹ / ₂ J x 16 ⇒ page 178	36	Yes	
2.8l 150 kW	Standard tyres	205/55 R 16 91W	6 ¹ / ₂ J x 16 ⇒ page 181	42	No	
	Modification	225/45 R 17 91W	7 J x 17 ⇒ page 183	38	No	
		225/45 R 17 91W	7 ¹ / ₂ J x 17 ⇒ page 186	38	No	
	Winter tyres	205/55 R 16 91T/H	5 ¹ / ₂ J x 16 ⇒ page 178	36	Yes	

Tyre pressures can be found on the inside of the fuel tank flap or in ⇒ Maintenance ; Booklet 37 .

26.2 Wheel allocation Golf, Golf 4Motion, type 1J model year 1998 to model year 2004

Explanation of information on wheels ⇒ [page 57](#)

Wheel bolt torque settings ⇒ Running gear, axles, steering - front and four-wheel drive; Rep. gr. 44 ; Wheel bolt torque settings

Pitch circle diameter 100 mm

Number of wheel bolt holes: 5

26.2.1 6 J x 14



Caution


Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 171](#) .



For Golf 55 kW, 74 kW, 77 kW petrol engines, 50 kW diesel


1J0 601 027 J - Wheel and tyre combination ⇒ [page 171](#)

Size:	6 J x 14
Wheel offset in mm:	38
Wheel load in kg:	520

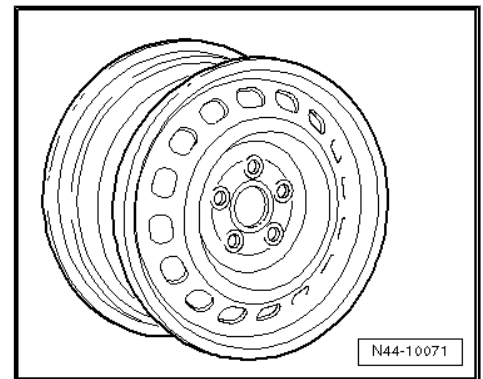

1J0 601 027 N, 1J0 601 027 P - Wheel and tyre combination
⇒ [page 171](#)

Size:	6 J x 14
Wheel offset in mm:	38
Wheel load in kg:	520

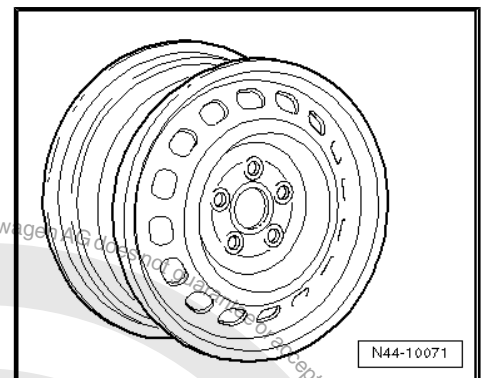

26.2.2 6 J x 15



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 171](#).

For Golf 55 kW, 74 kW, 77 kW petrol engines, 50 kW diesel


1J0 601 025 N, 1J0 601 025 AG - Wheel and tyre combination
⇒ [page 172](#)



Note

These rims are allowed only for vehicles with a maximum permitted axle load of 1000 kg.

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	500

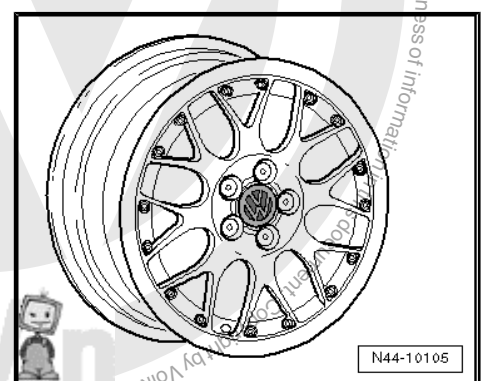


For vehicles up to and including 96 kW and petrol engines to 110 kW




1J0 601 027 - Wheel and tyre combination ⇒ [page 172](#)

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	550

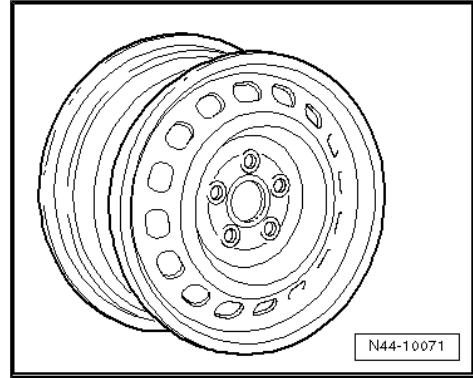

1J0 601 027 H, 1J0 601 027 Q - Wheel and tyre combination ⇒ [page 172](#)

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	550

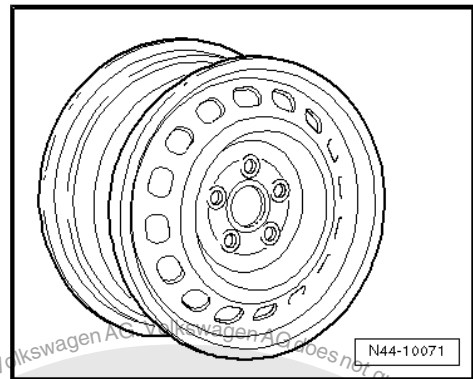


1J0 601 025 B, 1J0 601 025 AA - Wheel and tyre combination ⇒ [page 172](#)

 Note


These rims are allowed only for vehicles with a maximum permitted axle load of 1000 kg.

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	500

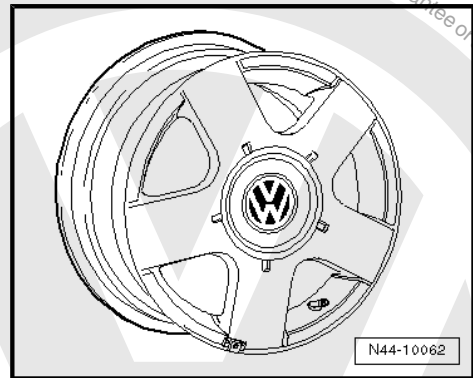

1J0 601 025 Q - Wheel and tyre combination ⇒ [page 172](#)


Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	530

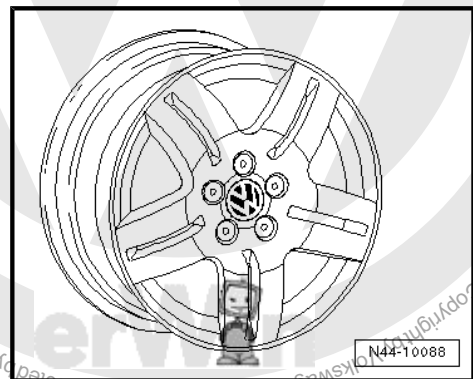




1J0 601 025 AK - Wheel and tyre combination ⇒ page 172

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	580

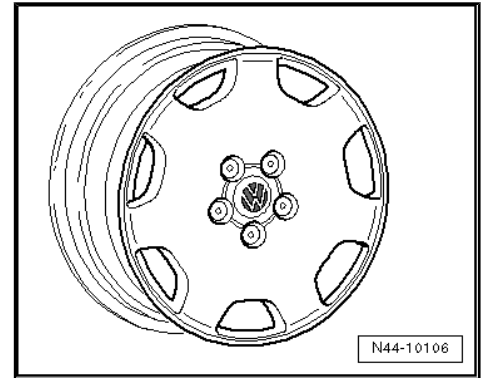


1C0 601 025 F - Wheel and tyre combination ⇒ page 172

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	550

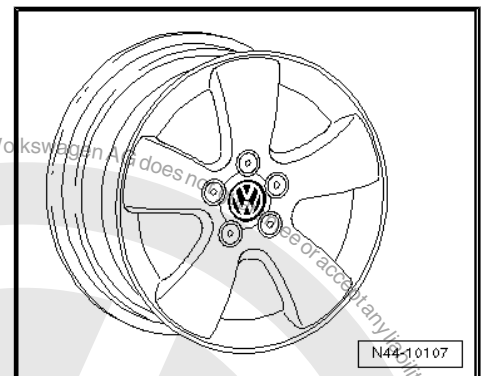


1J0 601 025 P, 1J0 601 025 AL - Wheel and tyre combination ⇒ page 172

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	550

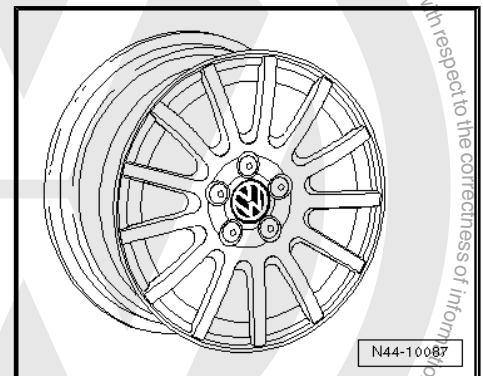

1J0 601 025 BD - Wheel and tyre combination ⇒ page 172

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	580

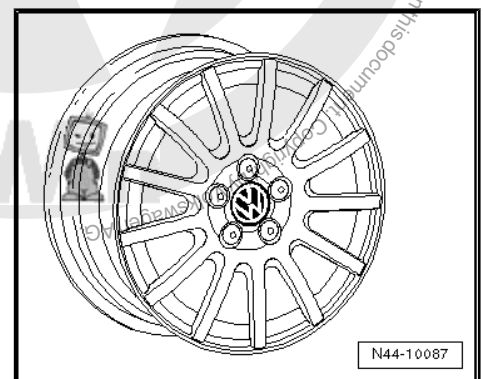


For vehicles with 110 kW TDI and petrol engines 1.8l 132 kW, 2.3l 125 kW, 2.8l 150 kW




1J0 601 025 P, 1J0 601 025 AL - Wheel and tyre combination
⇒ [page 173](#)

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	550

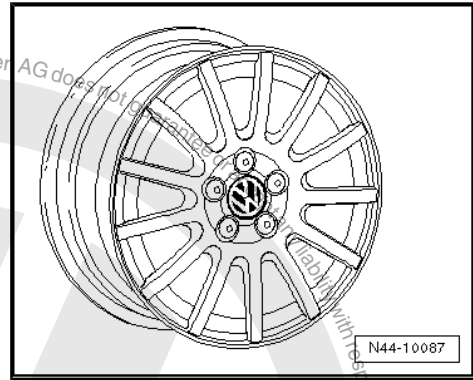

1J0 601 025 BD - Wheel and tyre combination ⇒ [page 173](#)

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	580

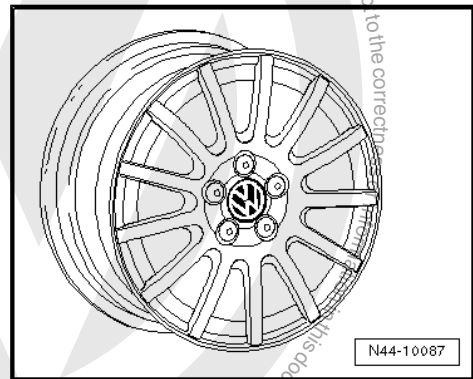

26.2.3 5 1/2 J x 16



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 171](#) .


For vehicles up to and including 96 kW and petrol engines to 110 kW

For vehicles with 110 kW TDI and petrol engines 1.8l 132 kW, 2.3l 125 kW, 2.8l 150 kW

Snow tyres

1J0 601 025 M, 1J0 601 025 AF - Wheel and tyre combination
⇒ [page 172](#)


Size:	5 1/2 J x 16
Wheel offset in mm:	36
Wheel load in kg:	550

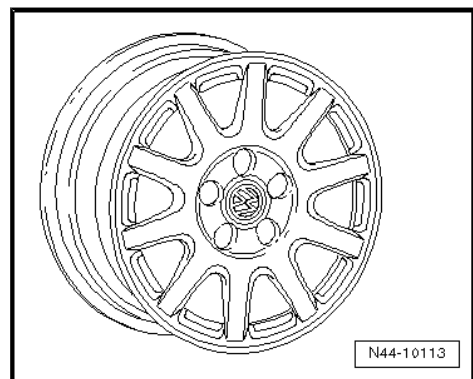



1J0 601 025 AP - Wheel and tyre combination ⇒ [page 172](#)

Size:	5 ¹ / ₂ J x 16
Wheel offset in mm:	36
Wheel load in kg:	550

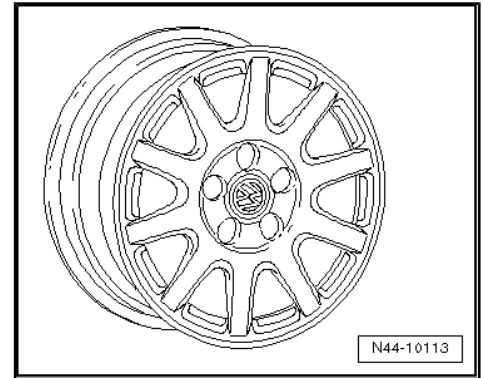

26.2.4 6¹/₂ J x 16



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 171](#) .

For vehicles up to and including 96 kW and petrol engines to 110 kW


1C0 601 025 A, 1C0 601 025 D - Wheel and tyre combination ⇒ [page 172](#)



Note


These rims are allowed only for vehicles with a maximum permitted axle load of 1000 kg.

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	500

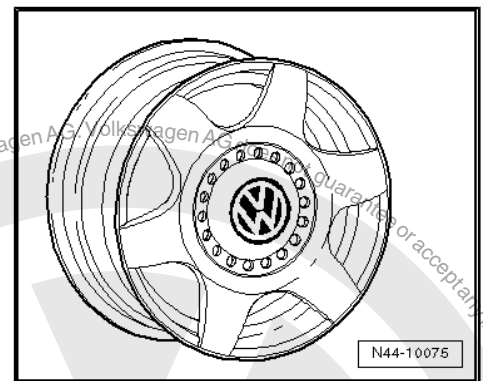

1J0 601 027 L, 1J0 601 027 R - Wheel and tyre combination ⇒ [page 172](#)


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

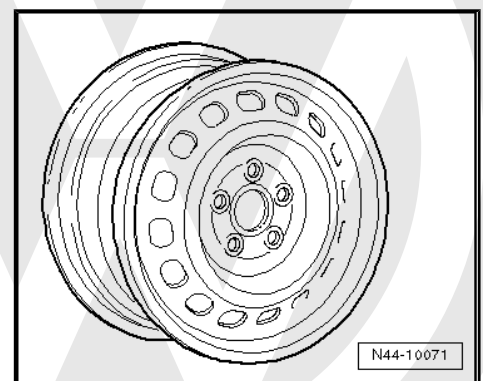




1J0 601 025 F, 1J0 601 025 AC - Wheel and tyre combination
⇒ [page 172](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	530

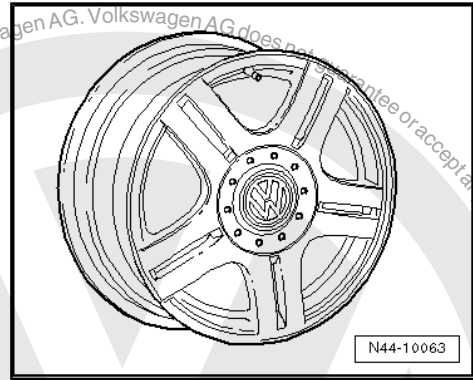


1J0 601 025 E, 1J0 601 025 AD - Wheel and tyre combination
⇒ [page 172](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	530

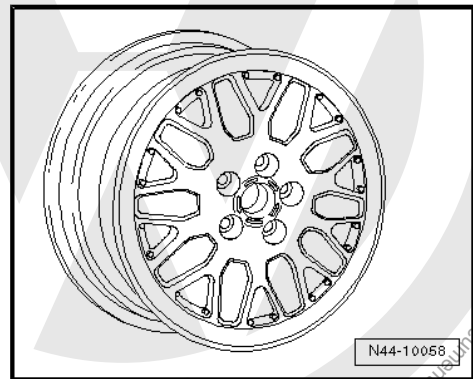


1J0 601 025 H, 1J0 601 025 AH - Wheel and tyre combination
⇒ [page 172](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	530

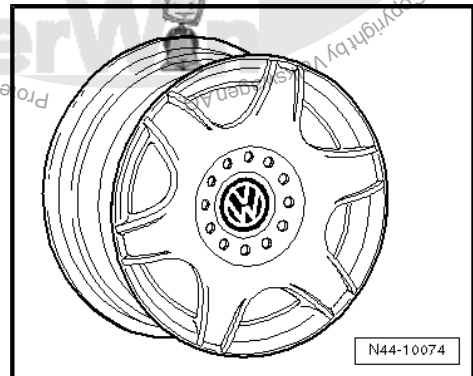

1J0 601 025 L, 1J0 601 025 AE - Wheel and tyre combination
⇒ [page 172](#)


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

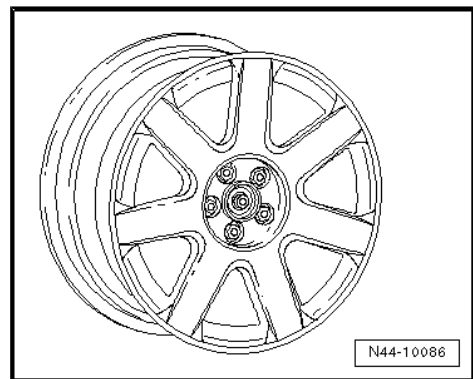




1C0 601 025 G - Wheel and tyre combination ⇒ page 172

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

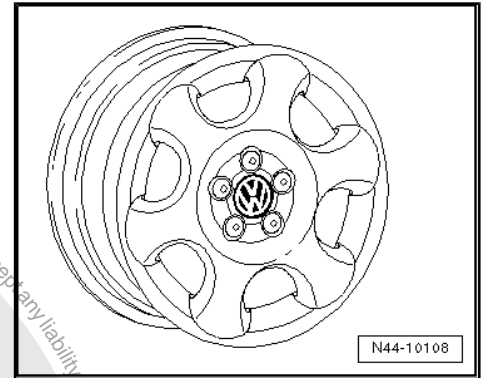


1C0 601 025 H - Wheel and tyre combination ⇒ page 172

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

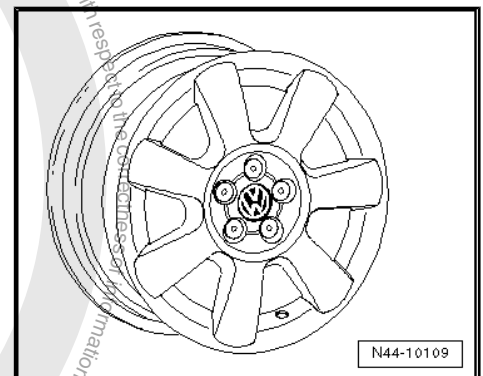


1J0 601 025 R, 1J0 601 025 AN - Wheel and tyre combination ⇒ page 172

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

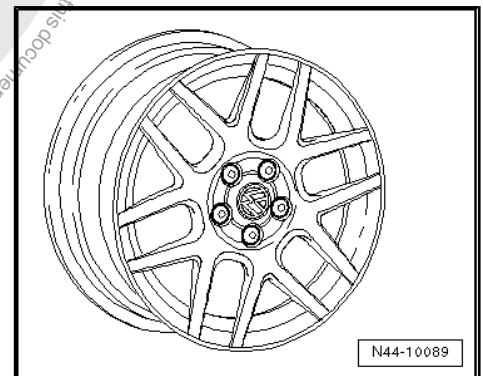

1J0 601 025 T, 1J0 601 025 AJ - Wheel and tyre combination ⇒ page 172

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

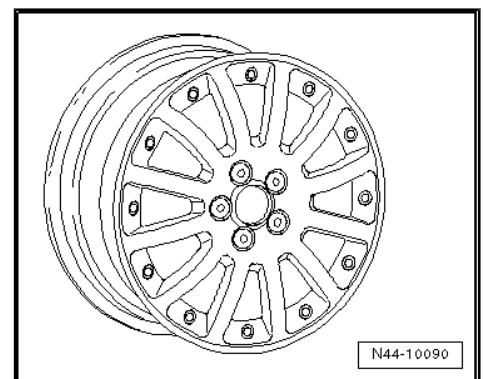


For vehicles with 110 kW TDI and petrol engines 1.8l 132 kW, 2.3l 125 kW, 2.8l 150 kW




1J0 601 027 L, 1J0 601 027 R - Wheel and tyre combination
⇒ [page 173](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

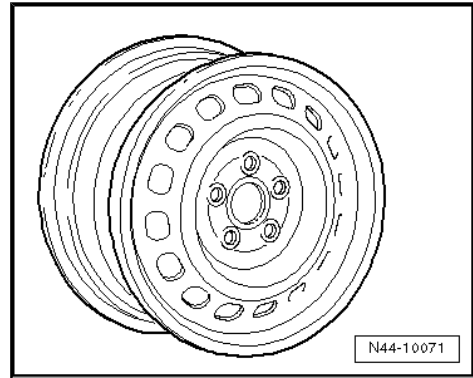


1J0 601 025 F, 1J0 601 025 AC - Wheel and tyre combination
⇒ [page 173](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	530

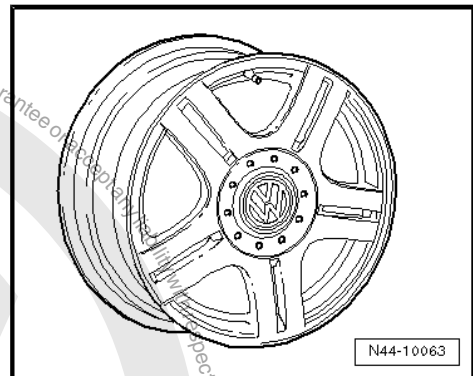


1J0 601 025 L, 1J0 601 025 AE - Wheel and tyre combination
⇒ [page 173](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

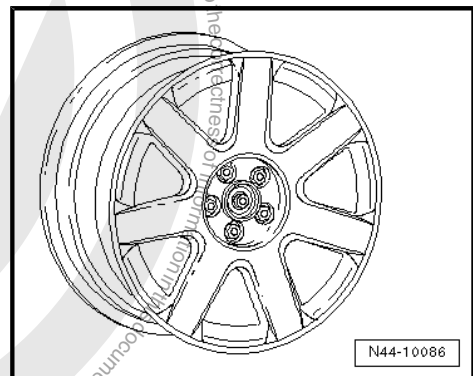

1J0 601 025 AN, 1J0 601 025 R - Wheel and tyre combination
⇒ [page 173](#)


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

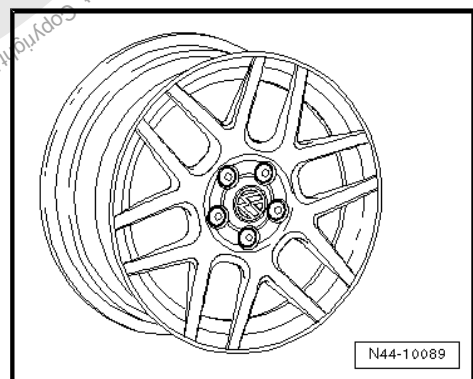




1J0 601 025 T, 1J0 601 025 AJ - Wheel and tyre combination
⇒ [page 173](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

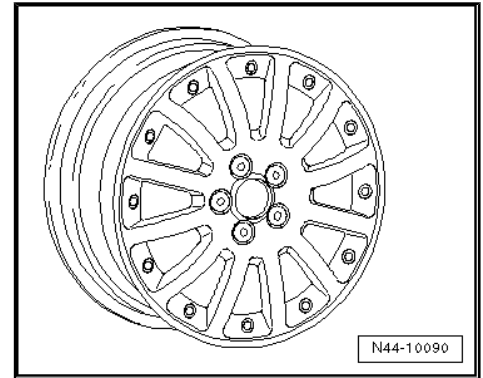


1C0 601 025 G - Wheel and tyre combination ⇒ [page 173](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

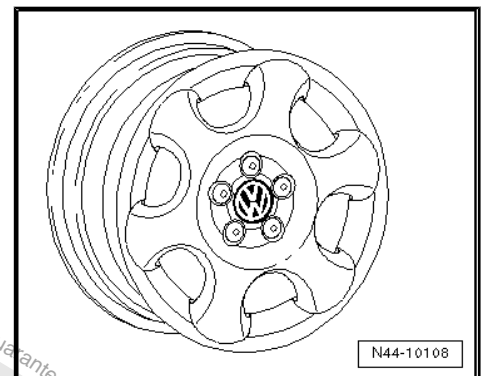


1C0 601 025 H - Wheel and tyre combination ⇒ [page 173](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

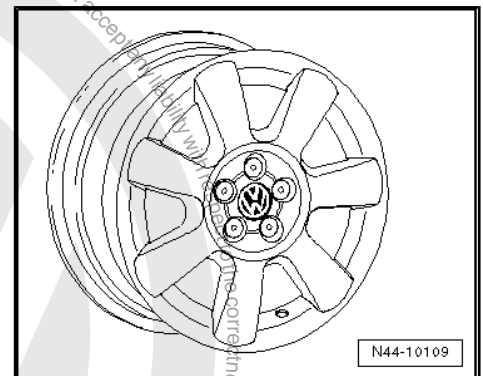

26.2.5 7 J x 17


The following wheels are permitted only if the stated conditions
⇒ [page 186](#) are fulfilled.

	<p>Caution</p> <p><i>Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 171 .</i></p>
---	---




1J0 601 025 J, 1J0 601 025 S - Wheel and tyre combination
⇒ [page 172](#)

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	580

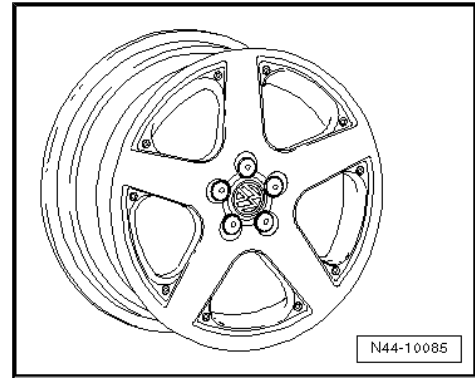


1J0 601 025 AB - Wheel and tyre combination ⇒ [page 172](#)

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

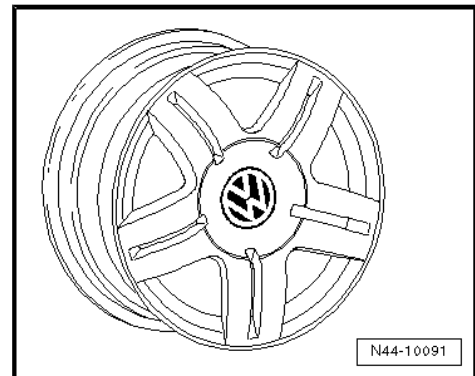


1C0 601 025 B, 1C0 601 025 E - Wheel and tyre combination
⇒ [page 172](#)

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

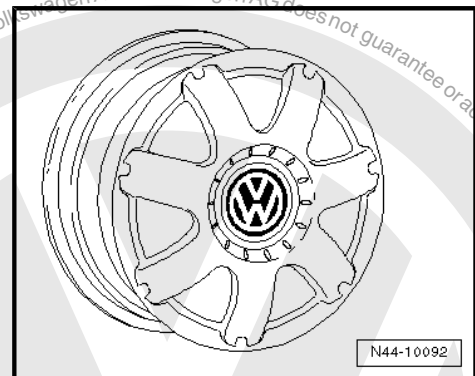

1C0 601 025 J - Wheel and tyre combination ⇒ [page 172](#)

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

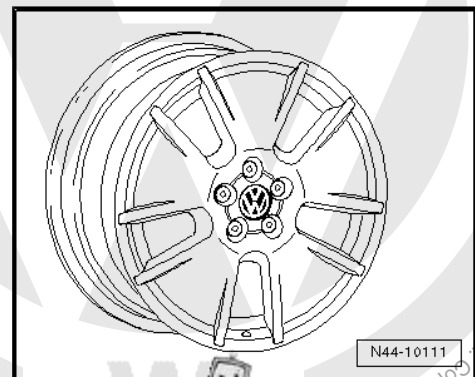




1C0 601 025 K, 1C0 601 025 Q - Wheel and tyre combination
⇒ [page 172](#)


Alloy disc-type wheels with exchangeable trim elements
⇒ [page 58](#)

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

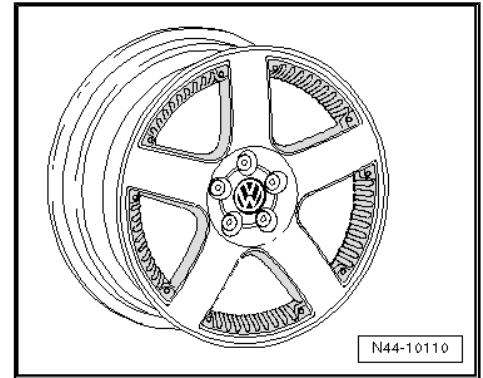


1J0 601 025 BE - Wheel and tyre combination ⇒ [page 172](#)

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

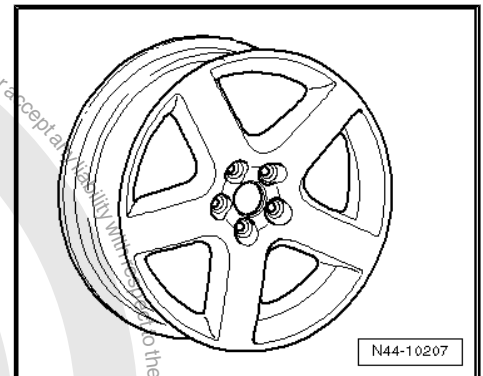


1J0 601 025 AS - Wheel and tyre combination ⇒ [page 172](#)

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

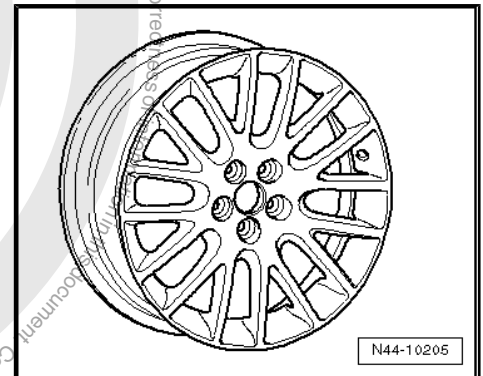

1C0 601 025 M - Wheel and tyre combination ⇒ [page 172](#)

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

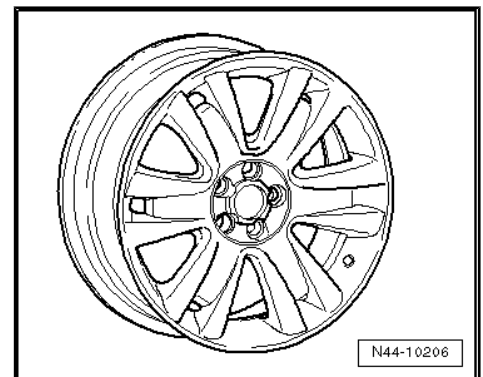



26.2.6 7¹/₂ J x 17

The following wheels are permitted only if the stated conditions
⇒ [page 186](#) are fulfilled.




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 171](#) .


1J0 601 025 BF - Wheel and tyre combination ⇒ [page 172](#)

Size:	7 ¹ / ₂ J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

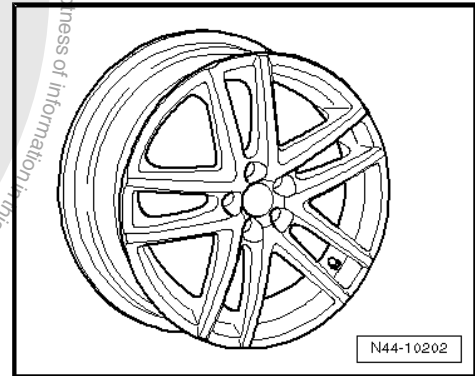

1J0 601 025 BH - Wheel and tyre combination ⇒ [page 172](#)

Size:	7 ¹ / ₂ J x 17
Wheel offset in mm:	38
Wheel load in kg:	560

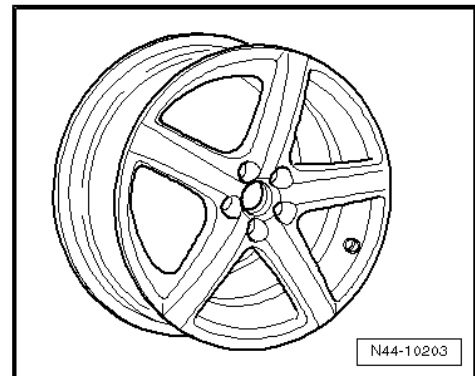

26.3 Conditions for fitting 17" wheels and tyres to Golf model year 1998 to model year 2004

17" wheels with 225/45 R 17 are possible only:

1. For vehicles from model year 2001.
2. If 17" sports running gear and a steering box with reduced steering arm travel are installed in the vehicle

Allocation of steering box PR No. to engine:	
PR No. of steering box	Engine
QZ 3 ⁵⁾	1.8l; 2.0l; 2.3l petrol engines; 1.9l diesel engines
QZ 4 ⁵⁾	Up to and including 1.6 l petrol engines
QZ 5 ⁵⁾	VR6 (US version); VR6 4Motion

5) Replacement part numbers ⇒ Electronic parts catalogue „ETKA“

3. If tyres with a maximum width of 218 mm are used.




4. If snow chains are not used.

Maximum width of 17" tyres

If a vehicle is retrofitted with 17" tyres or if existing 17" tyres are renewed, use only tyres with a maximum width -a- which does not exceed 218 mm during use ⁶⁾.

6) The measured width of the tyre including lettering on 7 J x 17 or 7¹/₂ J x 17 and at the specified tyre pressure.

If wider tyres are used, under certain circumstances, the tyres may contact the front axle and the bodywork while the car is being driven.

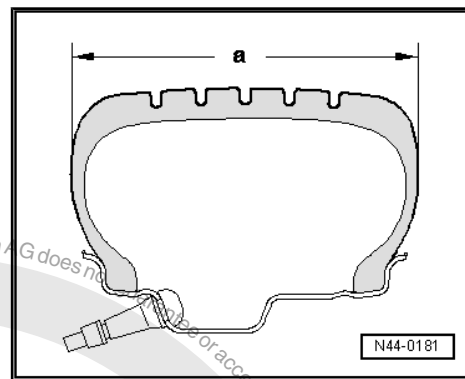

26.4 Golf R32, type 1J model year 2003 to model year 2005

Appendix 2 to Parts Certificate 1958/04

Type Approval No.: e1*98/14*0071*26 to e1*98/14*0071*30

Type Approval No.: e1*2001/116*0071*31 to e1*2001/116*0071*37

Overview

Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
3.2l 177 kW	Standard tyres	225/40 R 18 88Y	7 ¹ / ₂ J x 18 ⇒ page 189	38	No	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17
	Modification	225/45 R 17 91W	7 ¹ / ₂ J x 17 ⇒ page 188	38	No	Tyre makes recommended by Volkswagen:
	Winter tyres	205/50 R 17 93T/H	5 ¹ / ₂ J x 17 ⇒ page 188	36	Yes	◆ Summer tyres ⇒ page 473 ◆ Winter tyres ⇒ page 498 Tyre pressures for winter tyres ⇒ page 187 Snow chains may be fitted on the front wheels only!

Tyre pressures can be found on the inside of the fuel tank flap or in ⇒ Maintenance ; Booklet 37 .

Tyre pressures for winter tyres:

Tyre pressure M + S:	
Part load front:	2.3
Part load rear:	2.1
Full load front:	2.5
Full load rear:	2.9



26.5 Wheel allocation Golf R32, type 1J model year 2003 to model year 2005

Explanation of information on wheels ⇒ [page 57](#)

Wheel bolt torque settings ⇒ Running gear, axles, steering - front and four-wheel drive; Rep. gr. 44 ; Wheel bolt torque settings

Pitch circle diameter 100 mm
Number of wheel bolt holes: 5

26.5.1 5¹/₂ J x 17




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 187](#).

1J0 601 025 BB - Wheel and tyre combination ⇒ [page 187](#)

M + S wheel with snow chain

Size:	5 ¹ / ₂ J x 17
Wheel offset in mm:	36
Wheel load in kg:	550

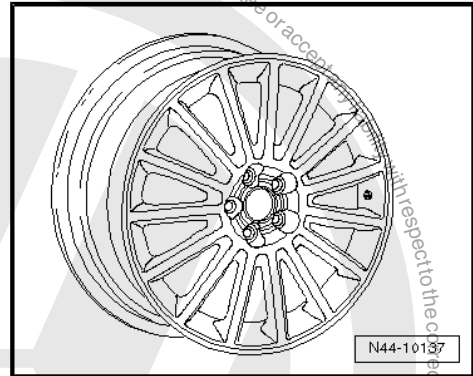

26.5.2 7¹/₂ J x 17



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 187](#).


1J0 601 025 BC - Wheel and tyre combination ⇒ [page 187](#)



Note

No snow chains permitted!

Size:	7 ¹ / ₂ J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

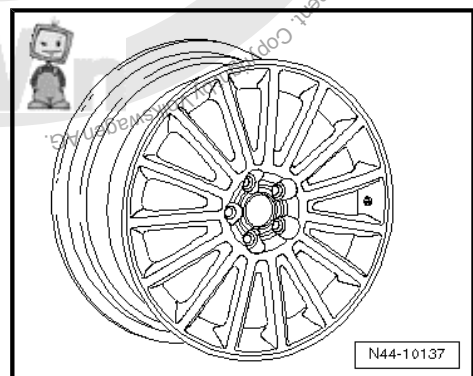



26.5.3 7 1/2 J x 18

Caution


Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 187](#).

1J0 601 025 BA - Wheel and tyre combination ⇒ [page 187](#)

Note

No snow chains permitted!

Size:	7 1/2 J x 18
Wheel offset in mm:	38
Wheel load in kg:	550

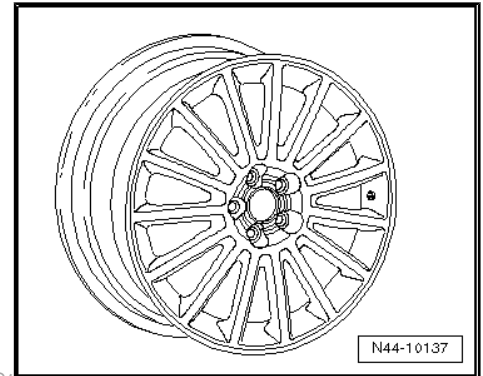

26.6 Golf Anniversary GTI, type 1J model year 2002

Appendix 2 to Parts Certificate 1486/03

Type Approval No.: e1*98/14*0071*21 to e1*98/14*0071*24

Overview

Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
1,8l 132 kW	Standard tyres	225/40 R 18 88Y	7 1/2 J x 18 ⇒ page 194	38	No	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17
	Modification	205/55 R 16 91W	6 1/2 J x 16 ⇒ page 191	42	No	Tyre makes recommended by Volkswagen: ◆ Summer tyres ⇒ page 473 ◆ Winter tyres ⇒ page 498
		225/45 R 17 91W	7 J x 17 ⇒ page 192	38	No	
	Winter tyres	205/55 R 16 91T/H	6 1/2 J x 16 ⇒ page 190	36	Yes	Fitting 17" and 18" wheels and tyres is permitted only if the stated conditions ⇒ page 194 are fulfilled. Snow chains may be fitted on the front wheels only!

Tyre pressures can be found on the inside of the fuel tank flap or in ⇒ Maintenance ; Booklet 37 .



26.7 Wheel allocation for Golf Anniversary GTI, type 1J model year 2002

Explanation of information on wheels ⇒ [page 57](#)

Wheel bolt torque settings ⇒ Running gear, axles, steering - front and four-wheel drive; Rep. gr. 44 ; Wheel bolt torque settings

Pitch circle diameter 100 mm
Number of wheel bolt holes: 5

26.7.1 5¹/₂ J x 16




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 189](#).

Snow tyres


1J0 601 025 M, 1J0 601 025 AF - Wheel and tyre combination
⇒ [page 189](#)

Size:	5 ¹ / ₂ J x 16
Wheel offset in mm:	36
Wheel load in kg:	550

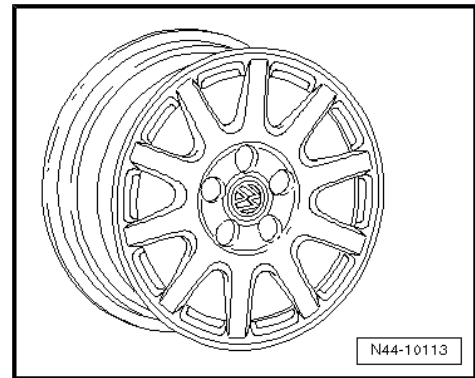

1J0 601 025 AP - Wheel and tyre combination ⇒ [page 189](#)

Size:	5 ¹ / ₂ J x 16
Wheel offset in mm:	36
Wheel load in kg:	550

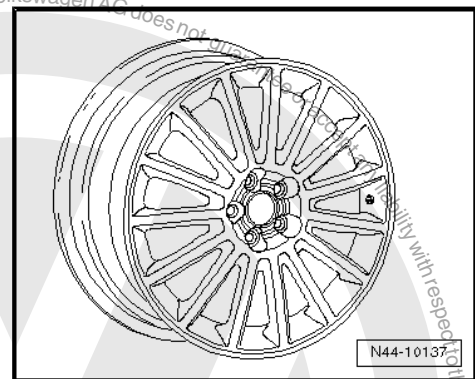




26.7.2 6 1/2 J x 16


1J0 601 027 L, 1J0 601 027 R - Wheel and tyre combination
 ⇒ [page 189](#)

Size:	6 1/2 J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

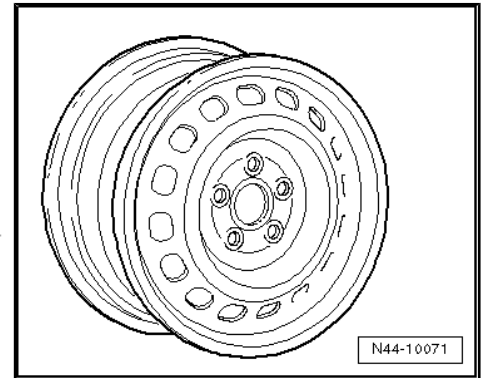


1J0 601 025 F, 1J0 601 025 AC - Wheel and tyre combination
 ⇒ [page 189](#)

Size:	6 1/2 J x 16
Wheel offset in mm:	42
Wheel load in kg:	530

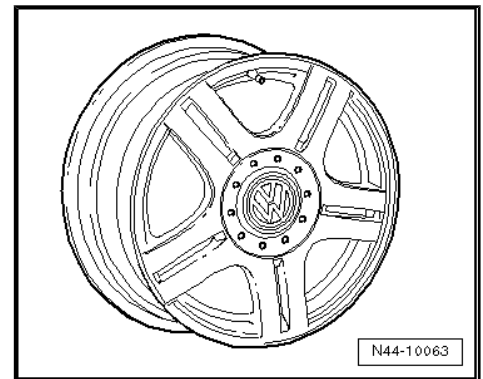


1J0 601 025 L, 1J0 601 025 AE - Wheel and tyre combination
 ⇒ [page 189](#)

Size:	6 1/2 J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

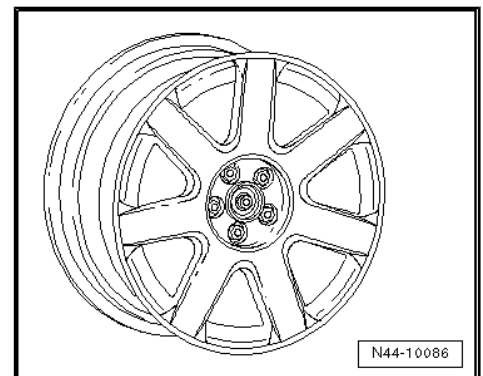

1J0 601 025 R - Wheel and tyre combination ⇒ [page 189](#)


Size:	6 1/2 J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

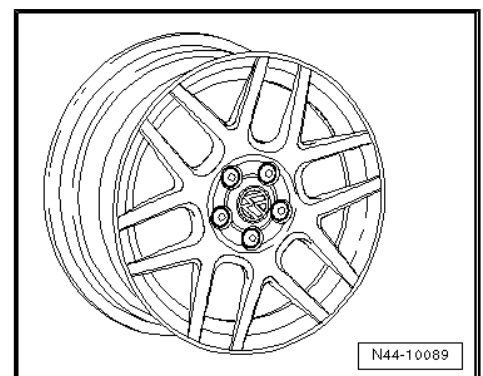




1J0 601 025 T, 1J0 601 025 AJ - Wheel and tyre combination
⇒ [page 189](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

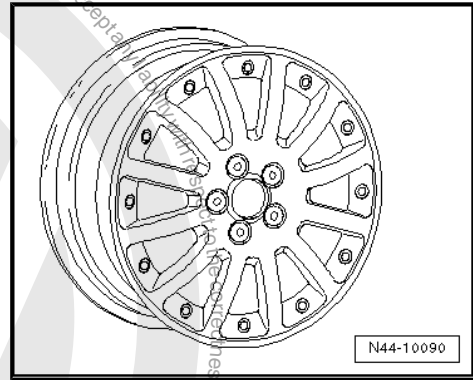


1C0 601 025 G - Wheel and tyre combination ⇒ [page 189](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

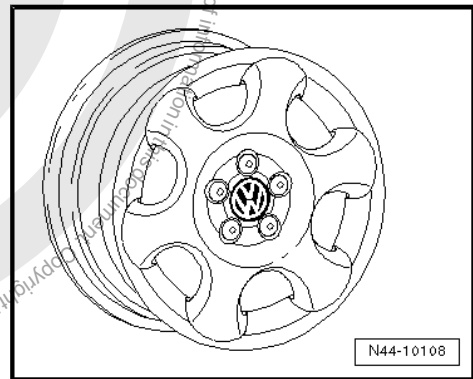

1C0 601 025 H - Wheel and tyre combination ⇒ [page 189](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

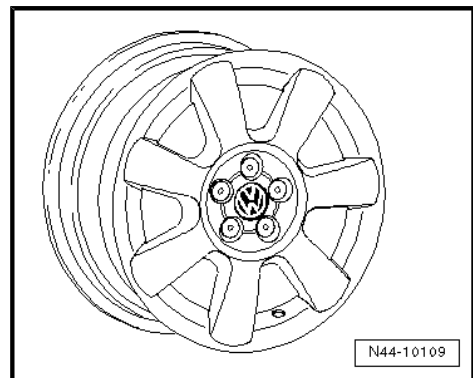

26.7.3 7 J x 17

The following wheels are permitted only if the stated conditions
⇒ [page 194](#) are fulfilled.




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 189](#).




1J0 601 025 J, 1J0 601 025 S - Wheel and tyre combination
 ⇒ [page 189](#)

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	580

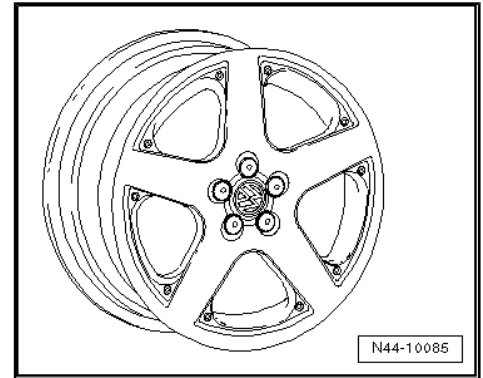


1J0 601 025 AB - Wheel and tyre combination ⇒ [page 189](#)

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

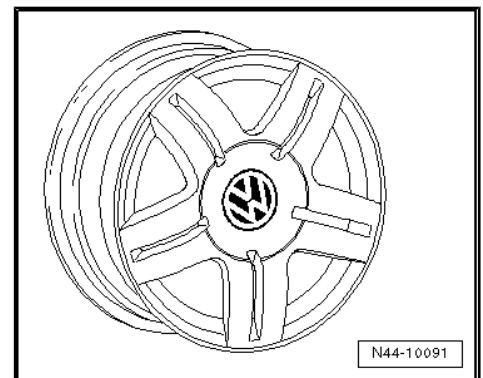


1C0 601 025 B, 1C0 601 025 E - Wheel and tyre combination
 ⇒ [page 189](#)

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

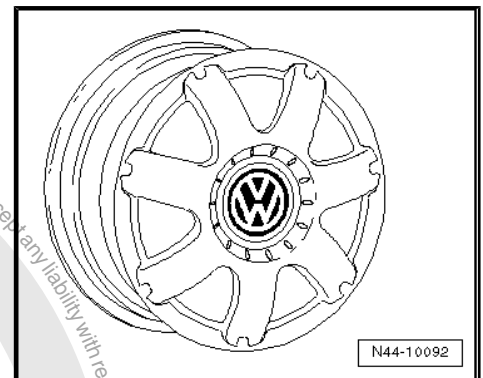

1C0 601 025 J - Wheel and tyre combination ⇒ [page 189](#)

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

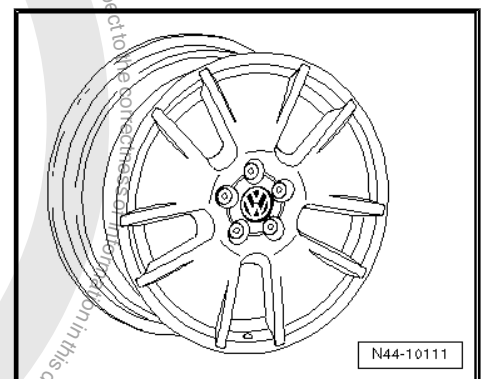

Protected by copyright. Copying for private or commercial purposes or in whole, is not permitted unless authorised by Volkswagen AG. Volkswagen AG does not guarantee or accept any liability with respect to the technical information contained in this document. Copyright by Volkswagen AG.






1C0 601 025 K, 1C0 601 025 Q - Wheel and tyre combination
⇒ [page 189](#)

Alloy disc-type wheels with exchangeable trim elements
⇒ [page 58](#)

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

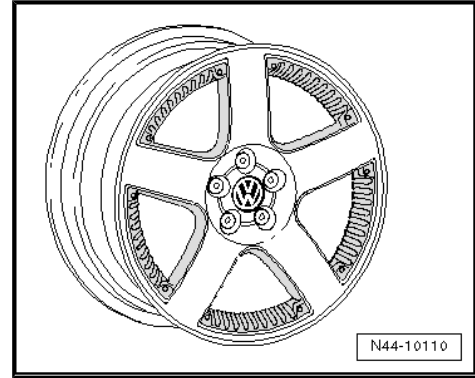


26.7.4 7 1/2 J x 18

The following wheels are permitted only if the stated conditions
⇒ [page 194](#) are fulfilled.

	Caution
<i>Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 189.</i>	

1J0 601 025 AM - Wheel and tyre combination ⇒ [page 189](#)

Size:	7 1/2 J x 18
Wheel offset in mm:	38
Wheel load in kg:	475

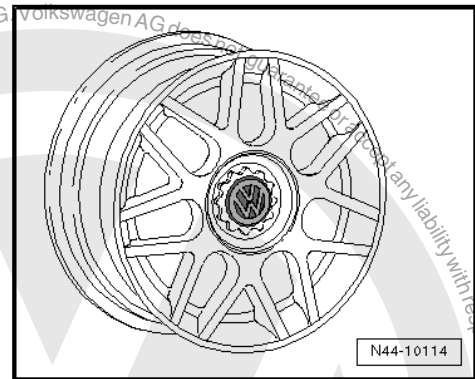

26.8 Conditions for fitting 17" and 18" wheels and tyres of Golf Anniversary GTI

Conditions for fitting 17" wheels and tyres

17" wheels with 225/45 R 17 are possible only:

1. For vehicles from model year 2001.
2. If a steering box with reduced steering arm travel for vehicles with 17" sports running gear is installed.

PR No. of steering box:	QZ 3 ⁷⁾
-------------------------	--------------------

7) Replacement part numbers ⇒ Electronic parts catalogue „ETKA“

3. If tyres with a maximum width of 218 mm are used.
4. If snow chains are not used.



Conditions for fitting 18" wheels and tyres

These vehicles are equipped as standard with a steering gear having reduced steering arm travel and sports running gear. These components cannot be retrofitted on vehicles which were not originally equipped with them.

Maximum width for 17" and 18" tyres


If a vehicle is retrofitted with 17" or 18" tyres or if existing 17" or 18" tyres are renewed, use only tyres which do not exceed the maximum width -a- during use ⁸⁾.

Dimension -a- for 17" tyres: 218 mm

Dimension -a- for 18" tyres: 225 mm

8) 1) The measured width of the tyre including lettering fitted on an appropriate wheel at the specified pressure.

If wider tyres are used, under certain circumstances, the tyres may contact the front axle and the bodywork while the car is being driven.

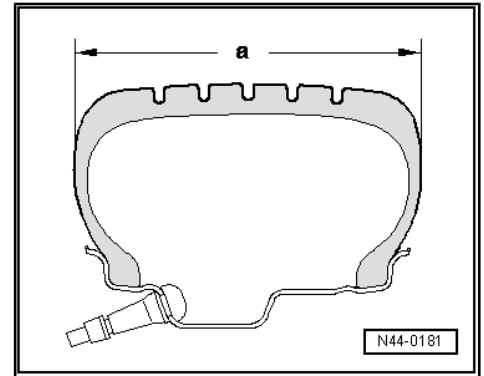



27 Golf model year 2004 to model year 2009

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of only genuine Volkswagen spare parts. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

27.1 Golf, Golf 4Motion, type 1K model year 2004 to model year 2006

Attachment to parts certificate 2066/08

The parts certificate can be found on the Volkswagen ServiceNet under Technology; Guides; Wheels and Tyres Guide.

Type approval number: e1*2001/116*0242*00 to e1*2001/116*0242*15

Overview

Model engine output	Tyres	Tyre size	Wheel rim	Offset in mm	Snow chains	Remarks
1.4l 55 kW; 1.4l 66 kW; petrol engines;	Standard tyres	195/65 R 15 91T	6 J x 15 ⇒ page 203	47	Yes	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
1.9l 66 kW TDI; 2.0l 55 kW SDI diesel engines	Modification	195/65 R 15 91H/V	6 J x 15 ⇒ page 203	47	Yes	Tyre makes recommended by Volkswagen: ♦ Summer tyres ⇒ page 466 ♦ All-season tyres ⇒ page 483 ♦ Winter tyres ⇒ page 494 * The 225/40 R 18 92Y tyre on the 7 1/2 J x 18 offset 51 rim is permitted only on vehicles with sports running gear and rear axle camber of -1°45'!
		195/65 R 15 91T/H/V	6 1/2 J x 15 ⇒ page 204	50	Yes	
		205/60 R 15 91H/V	6 J x 15 ⇒ page 203	47	Yes	
		205/55 R 16 91H/V/W	6 1/2 J x 16 ⇒ page 205	50	No	
		225/45 R 17 91H/V/W	7 J x 17 ⇒ page 210	54	No	
		225/45 R 17 91H/V/W	7 1/2 J x 17 ⇒ page 212	51	No	
		225/40 R 18 92Y* ⇒ page 197	7 1/2 J x 18 ⇒ page 213	51	No	
	Winter tyres	195/65 R 15 91Q/T/H	6 J x 15 ⇒ page 203	47	Yes	
		205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 205	50	Yes	
		Standard tyres	195/65 R 15 91H	6 J x 15 ⇒ page 203	47	
1.6l 75 kW; 1.6l 85 kW; petrol engines; 1.9l 77 kW TDI diesel engine	Modification	195/65 R 15 91V	6 J x 15 ⇒ page 203	47	Yes	
		195/65 R 15 91H/V	6 1/2 J x 15 ⇒ page 204	50	Yes	
		205/60 R 15 91H/V	6 J x 15 ⇒ page 203	47	Yes	
		205/55 R 16 91H/V/W	6 1/2 J x 16 ⇒ page 205	50	No	
		225/45 R 17 91H/V/W	7 J x 17 ⇒ page 210	54	No	



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
		225/45 R 17 91H/V/W	7 ¹ / ₂ J x 17 ⇒ page 212	51	No	
		225/40 R 18 92Y* ⇒ page 197	7 ¹ / ₂ J x 18 ⇒ page 213	51	No	
	Winter tyres	195/65 R 15 91Q/T/H	6 J x 15 ⇒ page 203	47	Yes	
		205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 205	50	Yes	
2.0l 110 kW; petrol engine 2.0l 100 kW TDI; 2.0l 103 kW TDI; diesel engines	Standard tyres	205/55 R 16 91V	6 ¹ / ₂ J x 16 ⇒ page 205	50	No	
	Modification	195/65 R 15 91V	6 J x 15 ⇒ page 203	47	Yes	
		195/65 R 15 91V	6 ¹ / ₂ J x 15 ⇒ page 204	50	Yes	
		205/60 R 15 91V	6 J x 15 ⇒ page 203	47	Yes	
		205/55 R 16 91W	6 ¹ / ₂ J x 16 ⇒ page 205	50	No	
		225/45 R 17 91V/W	7 J x 17 ⇒ page 210	54	No	
		225/45 R 17 91V/W	7 ¹ / ₂ J x 17 ⇒ page 212	51	No	
		225/40 R 18 92Y* ⇒ page 197	7 ¹ / ₂ J x 18 ⇒ page 213	51	No	
	Winter tyres	195/65 R 15 91Q/T/H	6 J x 15 ⇒ page 203	47	Yes	
		205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 205	50	Yes	
	1.4l 125 kW; petrol engine	Standard tyres	205/55 R 16 91V	6 ¹ / ₂ J x 16 ⇒ page 205	50	
Modification		225/45 R 17 91V/W	7 J x 17 ⇒ page 210	54	No	
	225/40 R 18 92Y* ⇒ page 197	7 ¹ / ₂ J x 18 ⇒ page 213	51	No		
	Winter tyres	205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 205	50	Yes	
2.0l 125 kW TDI; diesel engine						



Tyre inflation pressures are located on a sticker on inside of fuel tank flap or in ⇒ Maintenance ; Booklet ; Check tyres: condition, profile, inflation pressure, depth of tread .

27.2 Golf, Golf 4Motion, type 1K model year 2007 to model year 2009

Attachment to parts certificate 2066/08

The parts certificate can be found on the Volkswagen ServiceNet under Technology; Guides; Wheels and Tyres Guide.

Type approval number: e1*2001/116*0242*16 to e1*2001/116*0242*24

Overview

Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks	
1.4l 55 kW; 1.4l 59 kW; 1.4l 66 kW; 1.6l 75 kW; petrol engines 1.9l 66 kW TDI; 2.0 l 55 kW SDI; 1.9l 77 kW TDI; diesel engines	Standard tyres	195/65 R 15 91T	6 J x 15 ⇒ page 203	47	Yes	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17	
	Modification	195/65 R 15 91H/V	6 J x 15 ⇒ page 203	47	Yes	Tyre makes recommended by Volkswagen: ◆ Summer tyres ⇒ page 466 ◆ All-season tyres ⇒ page 483 ◆ Winter tyres ⇒ page 494	
		195/65 R 15 91T/H/V	6 1/2 J x 15 ⇒ page 204	50	Yes		
		205/60 R 15 91T/H/V	6 J x 15 ⇒ page 203	47	Yes		
		205/55 R 16 91T/H/V/W	6 1/2 J x 16 ⇒ page 205	50	No		
		225/45 R 17 91T/H/V/W	7 J x 17 ⇒ page 210	54	No		
		225/45 R 17 91T/H/V/W * ⇒ page 199	7 1/2 J x 17 ⇒ page 212	51	No		* 225/45 R 17 91T/H/V/W tyres on 7 1/2 J x 17 wheels with offset 51 are permitted only on vehicles with sports running gear!
		225/40 R 18 92Y** ⇒ page 199	7 1/2 J x 18 ⇒ page 213	51	No		** 225/40 R 18 92Y tyres on 7 1/2 J x 18 wheels with offset 51 is permitted only on vehicles with sports running gear and rear axle camber of -1°45'!



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
	Winter tyres	195/65 R 15 91Q/T/H	6 J x 15 ⇒ page 203	47	Yes	
		205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 205	50	Yes	
1.4l, 90 kW petrol engine with manual gearbox 1.6l 85 kW; 1.4l 103 kW petrol engines;	Standard tyres	195/65 R 15 91H	6 J x 15 ⇒ page 203	47	Yes	
	Modification	195/65 R 15 91V	6 J x 15 ⇒ page 203	47	Yes	
		195/65 R 15 91H/V	6 ¹ / ₂ J x 15 ⇒ page 204	50	Yes	
		205/60 R 15 91H/V	6 J x 15 ⇒ page 203	47	Yes	
		205/55 R 16 91H/V/W	6 ¹ / ₂ J x 16 ⇒ page 205	50	No	
		225/45 R 17 91H/V/W	7 J x 17 ⇒ page 210	54	No	
		225/45 R 17 91H/V/W * ⇒ page 199	7 ¹ / ₂ J x 17 ⇒ page 212	51	No	
		225/40 R 18 92Y** ⇒ page 199	7 ¹ / ₂ J x 18 ⇒ page 213	51	No	
	Winter tyres	195/65 R 15 91Q/T/H	6 J x 15 ⇒ page 203	47	Yes	
		205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 205	50	Yes	
1.4l 90 kW petrol engine with double clutch gearbox	Standard tyres	195/65 R 15 91H	6 J x 15 ⇒ page 203	47	Yes	
	Modification	195/65 R 15 91V/W	6 J x 15 ⇒ page 203	47	Yes	
		195/65 R 15 91H/V/W	6 ¹ / ₂ J x 15 ⇒ page 204	50	Yes	
		205/55 R 16 91H/V/W	6 ¹ / ₂ J x 16 ⇒ page 205	50	No	
		225/45 R 17 91H/V/W * ⇒ page 199	7 ¹ / ₂ J x 17 ⇒ page 212	51	No	
	Winter tyres	195/65 R 15 91Q/T/H	6 J x 15 ⇒ page 203	47	Yes	



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
		205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 205	50	Yes	
2.0l 110 kW petrol engine with front-wheel drive and automatic gearbox 2.0l 110 kW petrol engine 4MOTION 2.0l 100 kW TDI; 2.0l 103 kW TDI; diesel engines	Standard tyres	205/55 R 16 91H	6 1/2 J x 16 ⇒ page 205	50	No	
	Modification	195/65 R 15 91H/V	6 J x 15 ⇒ page 203	47	Yes	
		195/65 R 15 91H/V	6 1/2 J x 15 ⇒ page 204	50	Yes	
		205/60 R 15 91H/V	6 J x 15 ⇒ page 203	47	Yes	
		205/55 R 16 91H/V/W	6 1/2 J x 16 ⇒ page 205	50	No	
		225/45 R 17 91H/V/W	7 J x 17 ⇒ page 210	54	No	
		225/45 R 17 91H/V/W * ⇒ page 199	7 1/2 J x 17 ⇒ page 212	51	No	
	225/40 R 18 92Y** ⇒ page 199	7 1/2 J x 18 ⇒ page 213	51	No		
	Winter tyres	195/65 R 15 91Q/T/H	6 J x 15 ⇒ page 203	47	Yes	
		205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 205	50	Yes	
2.0l 110 kW; petrol engine with front-wheel drive and manual gearbox	Standard tyres	205/55 R 16 91V	6 1/2 J x 16 ⇒ page 205	50	No	
	Modification	195/65 R 15 91V	6 J x 15 ⇒ page 203	47	Yes	
		195/65 R 15 91V	6 1/2 J x 15 ⇒ page 204	50	Yes	
		205/60 R 15 91V	6 J x 15 ⇒ page 203	47	Yes	
		205/55 R 16 91V/W	6 1/2 J x 16 ⇒ page 205	50	No	



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
		225/45 R 17 91V/W	7 J x 17 ⇒ page 210	54	No	
		225/45 R 17 91V/W * ⇒ page 199	7 1/2 J x 17 ⇒ page 212	51	No	
		225/40 R 18 92Y** ⇒ page 199	7 1/2 J x 18 ⇒ page 213	51	No	
	Winter tyres	195/65 R 15 91Q/T/H	6 J x 15 ⇒ page 203	47	Yes	
		205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 205	50	Yes	
1.4l 125 kW; petrol engine	Standard tyres	205/55 R 16 91V	6 1/2 J x 16 ⇒ page 205	50	No	
	Modification	225/45 R 17 91V/W	7 J x 17 ⇒ page 210	54	No	
		225/45 R 17 91V/W * ⇒ page 199	7 1/2 J x 17 ⇒ page 212	51	No	
		225/40 R 18 92Y** ⇒ page 199	7 1/2 J x 18 ⇒ page 213	51	No	
	Winter tyres	205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 205	50	Yes	
2.0l 125 kW TDI; diesel engine	Standard tyres	205/55 R 16 91V	6 1/2 J x 16 ⇒ page 205	50	No	
	Modification	225/45 R 17 91V/W	7 J x 17 ⇒ page 210	54	No	
		225/40 R 18 92Y** ⇒ page 199	7 1/2 J x 18 ⇒ page 213	51	No	
	Winter tyres	205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 205	50	Yes	
		205/50 R 17 93Q/T/H	6 J x 17 ⇒ page 209	48.5	Yes*** ⇒ page 202	

*** Only snow chains with fine links of no more than 8 mm may be used
⇒ [page 203](#) .

Tyre inflation pressures are located on a sticker on inside of fuel tank flap or in ⇒ Maintenance ; Booklet ; Check tyres: condition, profile, inflation pressure, depth of tread .



Approved snow chains for 6 J x 17 offset 48.5 wheel rim

The following snow chains are only permissible in combination with the adjacent wheel and tyre combination!

Chain manufacturer Item no.	Accessory part number	Tyre size	Wheel rim	Part no.
Ottinger 100 956	-	205/50 R 17 93Q/T/H	6 J x 17 offset 48.5	1K0 601 025 N

27.3 Wheel allocation for Golf, Golf 4Motion, type 1K from model year 2004 to model year 2009

Explanation of information on wheels ⇒ [page 57](#)

Torque specifications for wheel bolts ⇒ Running gear, axles, steering; Rep. gr. 44 ; Torque specifications for fitting wheels

Pitch circle diameter: 112 mm

Number of wheel bolt holes: 5

27.3.1 6 J x 15




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 196](#)


1K0 601 027 C, 1K0 601 027 H - Wheel and tyre combination ⇒ [page 196](#)

Size:	6 J x 15
Wheel offset in mm:	47
Wheel load in kg:	615

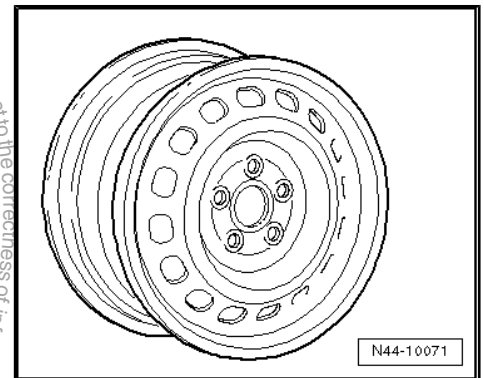

1K0 601 027 T - Wheel and tyre combination ⇒ [page 196](#)


Size:	6 J x 15
Wheel offset in mm:	47
Wheel load in kg:	615

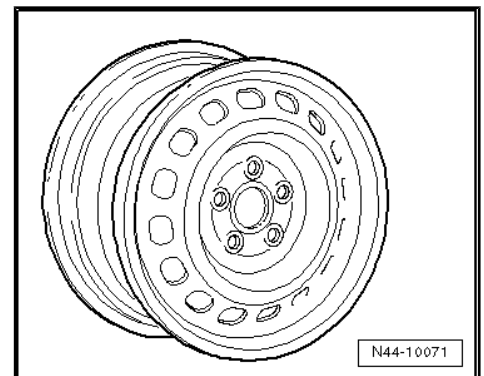



2K0 601 027 - Wheel and tyre combination ⇒ page 196

Size:	6 J x 15
Wheel offset in mm:	47
Wheel load in kg:	650

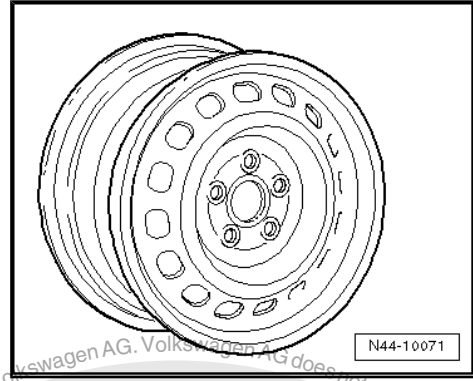

27.3.2 6 1/2 J x 15




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 196 .


1K0 601 025 A - Wheel and tyre combination ⇒ page 197

Size:	6 1/2 J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

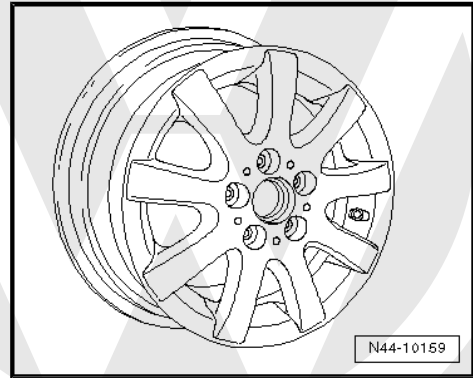


1K0 601 025 AK - Wheel and tyre combination ⇒ page 197

Size:	6 1/2 J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

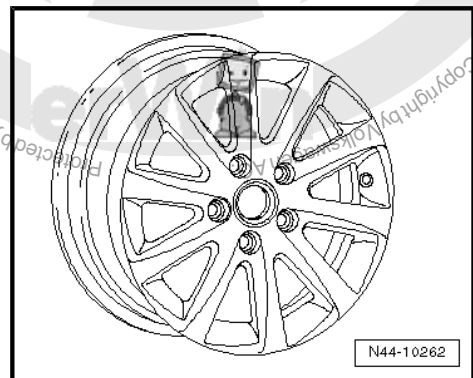

1K0 601 025 AQ - Wheel and tyre combination ⇒ page 197


Size:	6 1/2 J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

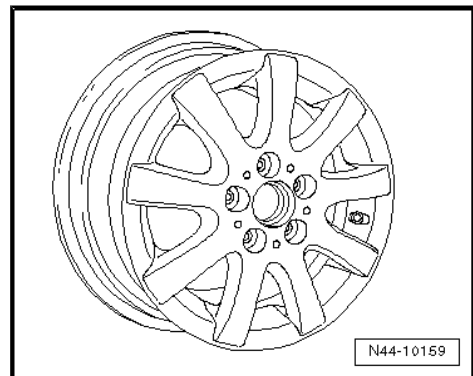



1K0 601 025 CA - Wheel and tyre combination ⇒ page 197

Size:	6 1/2 J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

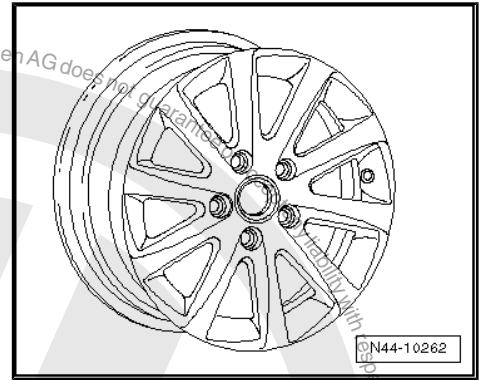

27.3.3 6 J x 16



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 196 .


Winter wheels

8P0 601 027 - Wheel and tyre combination ⇒ page 197

Size:	6 J x 16
Wheel offset in mm:	50
Wheel load in kg:	600


Use the following wheel bolt caps for wheel bolts

- ◆ 1K0.601.173 (4 per wheel)
- ◆ 1K0.601.173.A (1 per wheel)

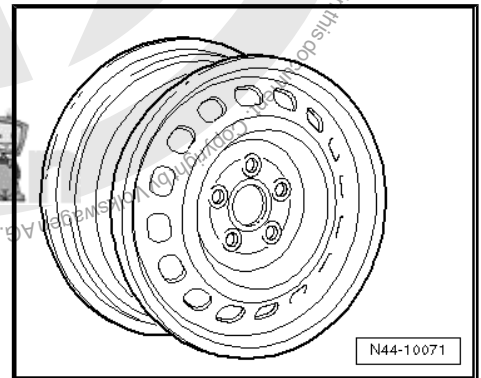

1K0 601 025 Q - Wheel and tyre combination ⇒ page 197

Size:	6 J x 16 EH2 ⇒ page 57
Wheel offset in mm:	50
Wheel load in kg:	615

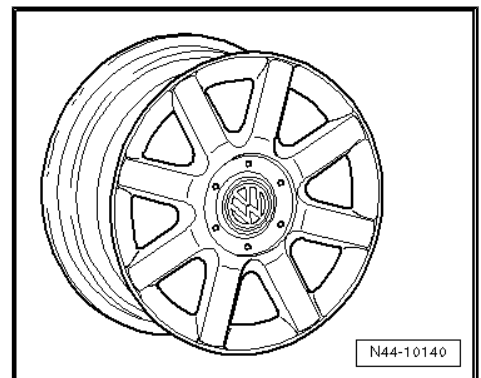

27.3.4 6 1/2 J x 16




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 196 .




1K0 601 027 A - Wheel and tyre combination ⇒ [page 197](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

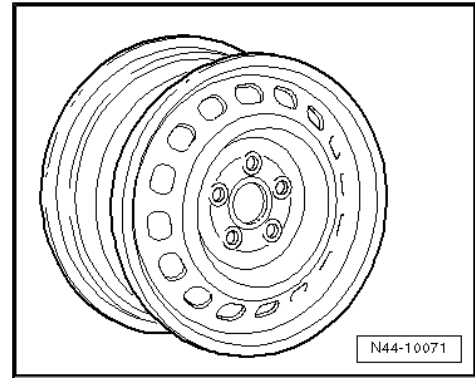


1K0 601 027 J - Wheel and tyre combination ⇒ [page 197](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

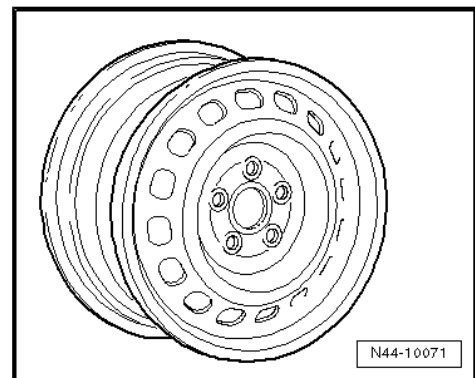


1K0 601 025 AJ - Wheel and tyre combination ⇒ [page 197](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

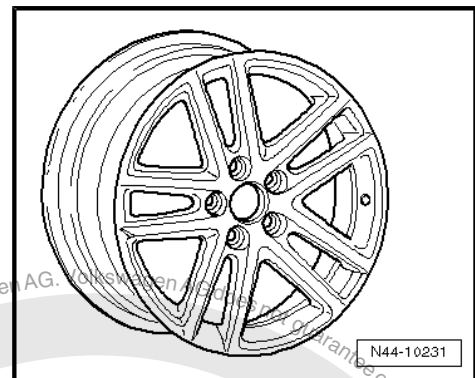

1K0 601 025 BC - Wheel and tyre combination ⇒ [page 197](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

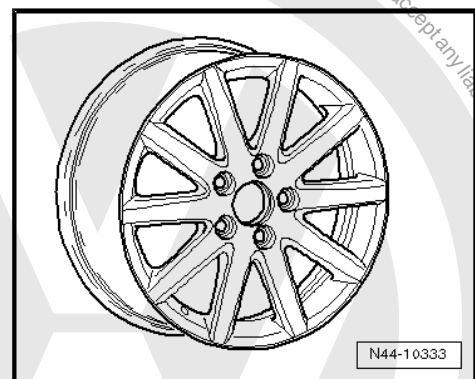


Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by Volkswagen AG. Volkswagen AG. does not accept any liability with respect to the correctness of information in this document. Copyright by Volkswagen AG.




1K0 601 025 BM - Wheel and tyre combination ⇒ page 197

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

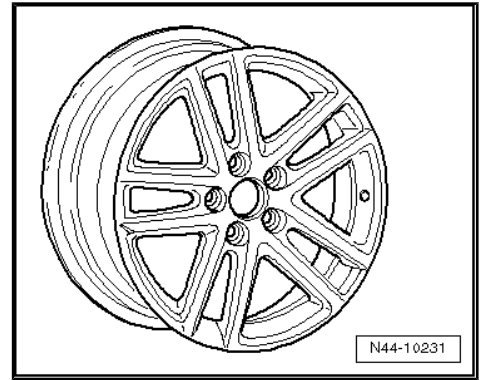


1K0 601 025 BR - Wheel and tyre combination ⇒ page 197

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

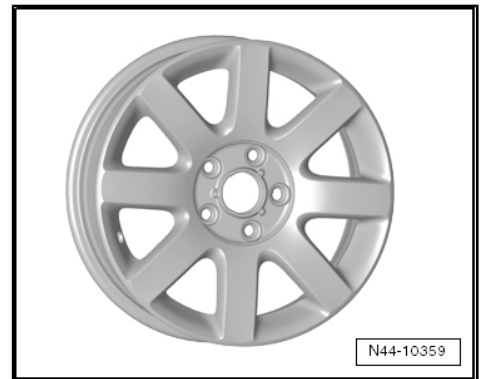


1K0 601 025 BS - Wheel and tyre combination ⇒ page 197

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

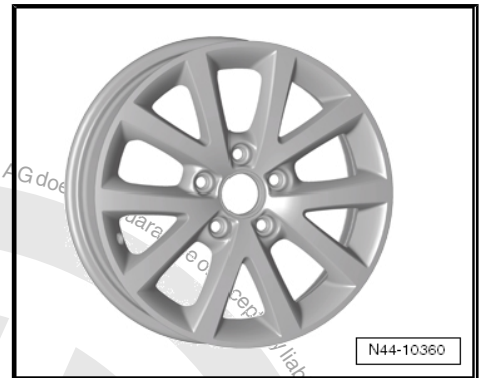

1K0 601 025 CB - Wheel and tyre combination ⇒ page 197

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

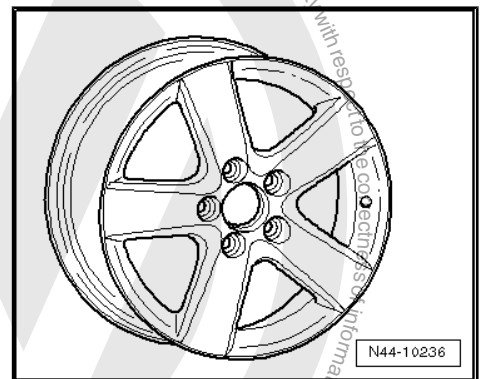


Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by Volkswagen AG. Volkswagen AG does not accept any liability with respect to the correctness of the information in this document. Copyright by Volkswagen AG.




1K0 601 025 CG - Wheel and tyre combination ⇒ page 197

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

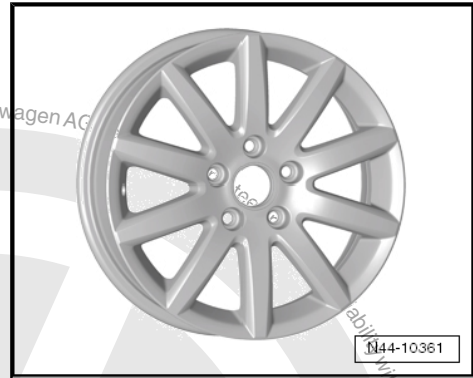


1T0 601 025 C - Wheel and tyre combination ⇒ page 197

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

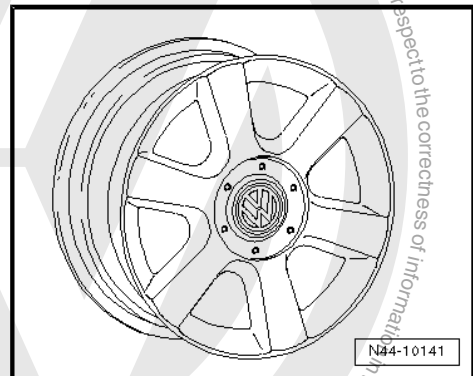


1K0 601 025 F - Wheel and tyre combination ⇒ page 197

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

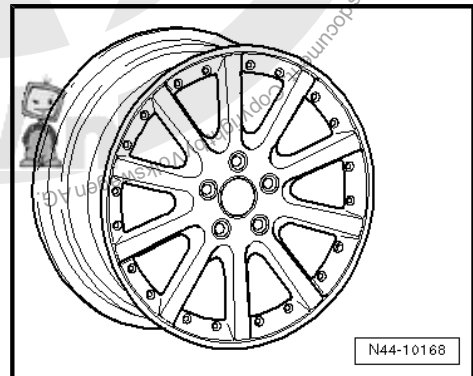

1K0 601 025 P - Wheel and tyre combination ⇒ page 197


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

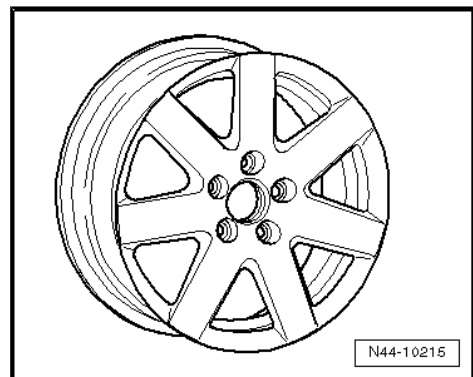




1K0 601 025 R - Wheel and tyre combination ⇒ page 197

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

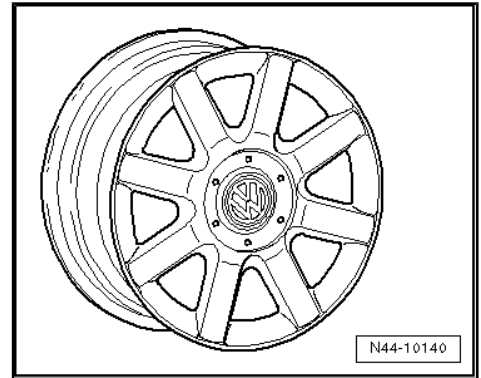


1T0 601 025 G; 1T0 601 025 K - Wheel and tyre combination ⇒ page 197

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

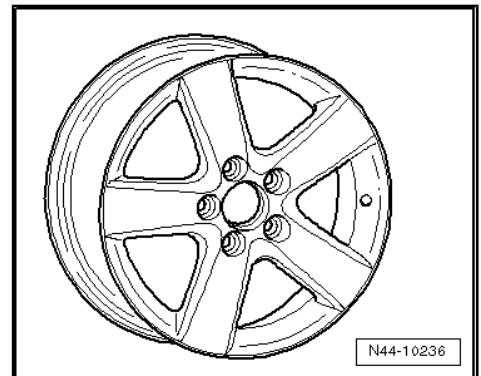


1T0 601 025 M - Wheel and tyre combination ⇒ page 197

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

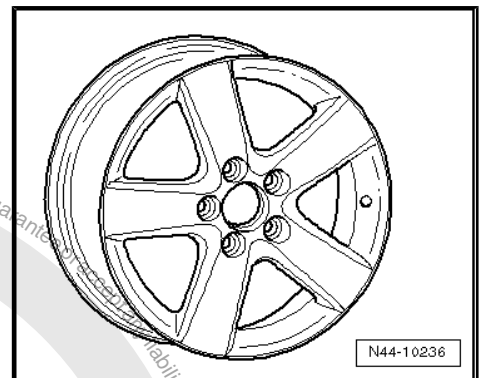

1T0 601 025 R - Wheel and tyre combination ⇒ page 197

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

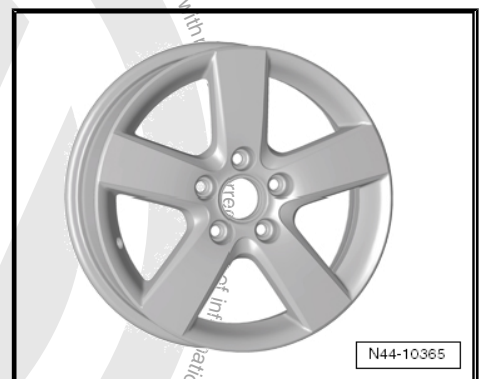

27.3.5 6 J x 17


	<p>Caution</p> <p><i>Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 196.</i></p>
--	--



Winter wheel

1K0 601 025 N - Wheel and tyre combination ⇒ [page 202](#)

Size:	6 J x 17
Wheel offset in mm:	48.5
Wheel load in kg:	615

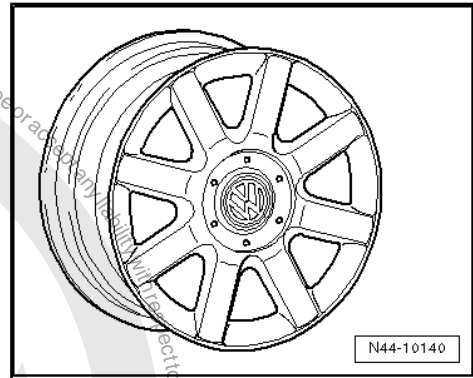

27.3.6 7 J x 17




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 196](#).


1K0 601 025 B - Wheel and tyre combination ⇒ [page 197](#)

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

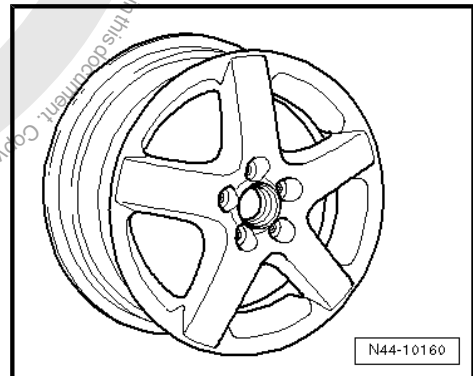

1K0 601 025 C - Wheel and tyre combination ⇒ [page 197](#)


Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

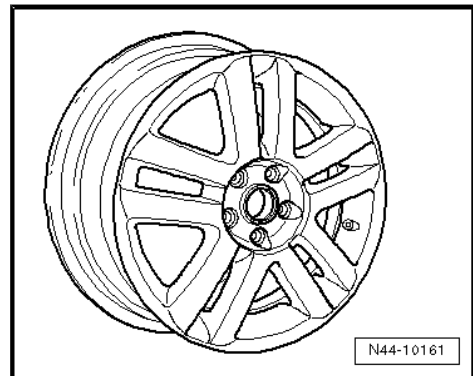




1K0 601 025 J - Wheel and tyre combination ⇒ page 197

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

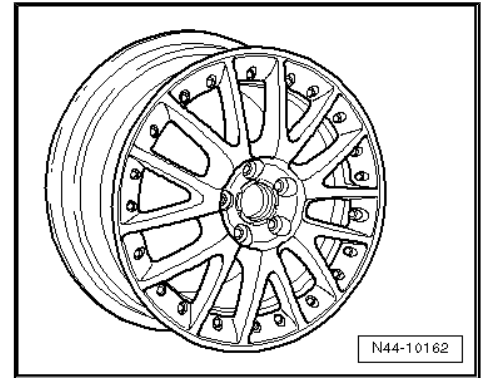


1K0 601 025 K - Wheel and tyre combination ⇒ page 197

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

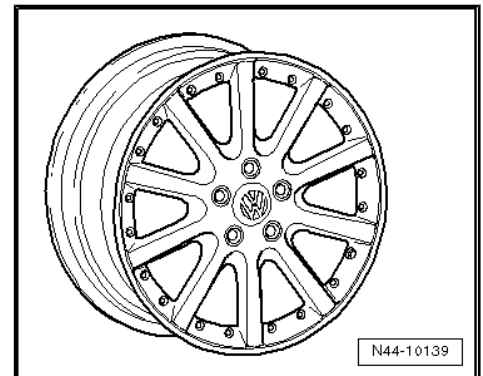


1K0 601 025 M - Wheel and tyre combination ⇒ page 197

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

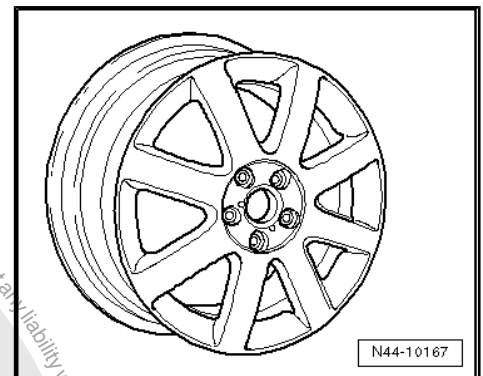

1K0 601 025 T - Wheel and tyre combination ⇒ page 197

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

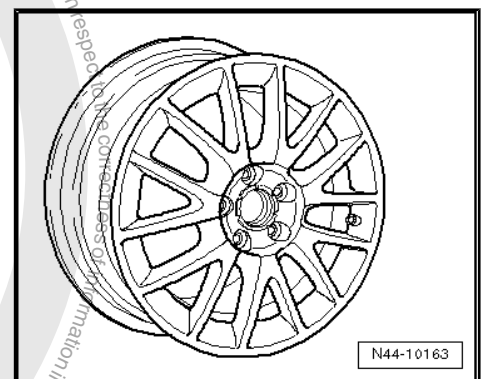


Protected by copyright. Copying for private or commercial purposes, reproduction, distribution, public communication, is not permitted unless authorised by Volkswagen AG. Volkswagen AG does not guarantee or accept any liability with respect to the content of this document. Copyright by Volkswagen AG.




1K0 601 025 AF - Wheel and tyre combination ⇒ page 197

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	630

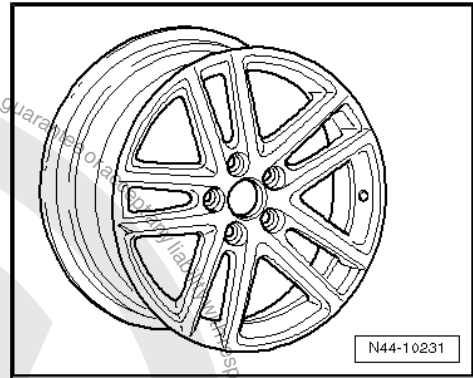


1K0 601 025 AE - Wheel and tyre combination ⇒ page 197

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	630

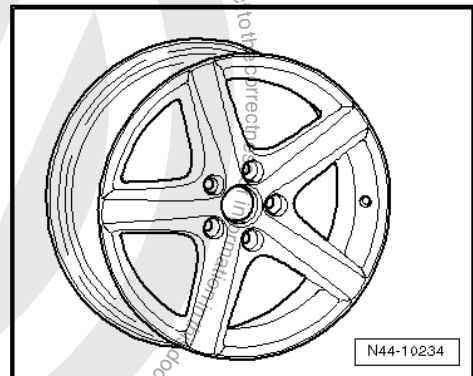

1K0 601 025 AN - Wheel and tyre combination ⇒ page 197

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

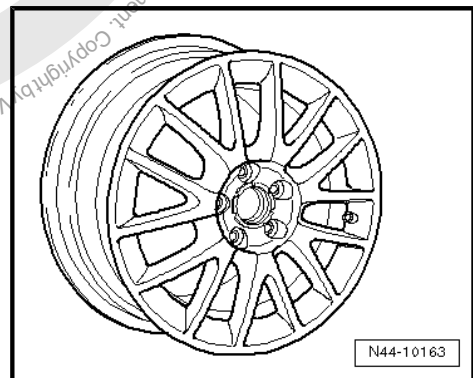

27.3.7 7 1/2 J x 17




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 196 .

1K0 601 025 AC - Wheel and tyre combination ⇒ page 197


Size:	7 1/2 J x 17
Wheel offset in mm:	51
Wheel load in kg:	615

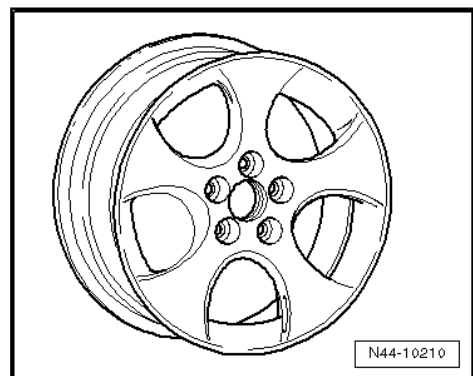




1K0 601 025 BB - Wheel and tyre combination ⇒ page 197

Size:	7 ¹ / ₂ J x 17
Wheel offset in mm:	51
Wheel load in kg:	615

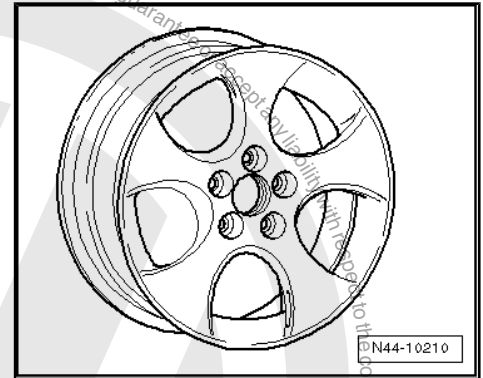

1K0 601 025 BK - Wheel and tyre combination ⇒ page 197

Size:	7 ¹ / ₂ J x 17
Wheel offset in mm:	51
Wheel load in kg:	615

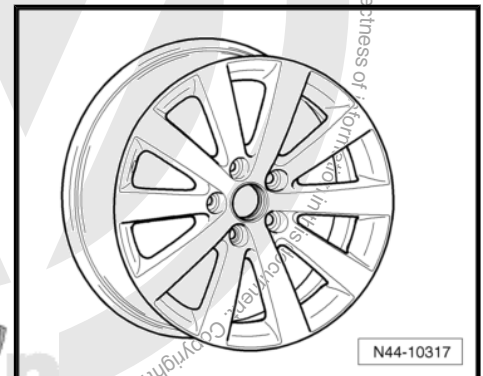

27.3.8 7¹/₂ J x 18




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 196 .

1K0 601 025 AD - Wheel and tyre combination ⇒ page 197

Only for vehicles with sports running gear and rear axle camber of -1°45'


Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	630

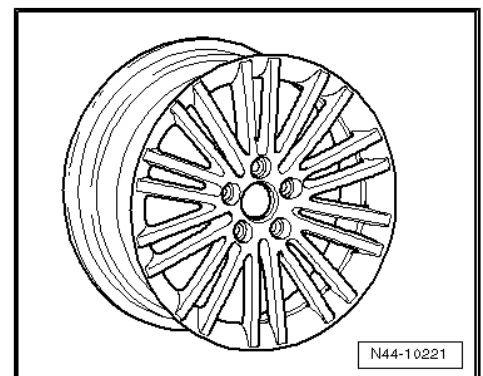

1K0 601 025 AH - Wheel and tyre combination ⇒ page 197

Only for vehicles with sports running gear and rear axle camber of -1°45'

Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

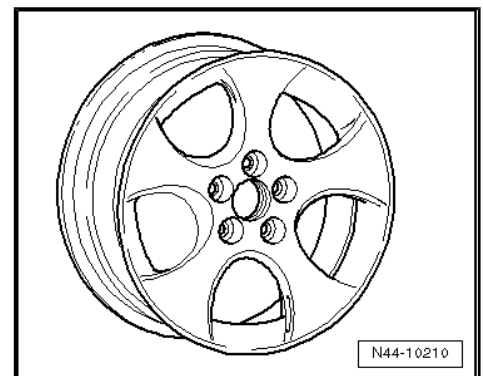




1K0 601 025 AG - Wheel and tyre combination ⇒ [page 197](#)

Only for vehicles with sports running gear and rear axle camber of -1°45'


Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	630

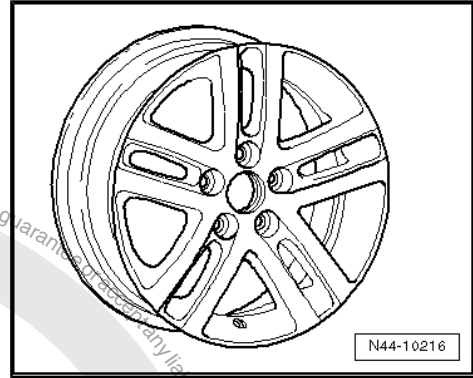

1K0 601 025 AM - Wheel and tyre combination ⇒ [page 197](#)

Only for vehicles with sports running gear and rear axle camber of -1°45'


Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

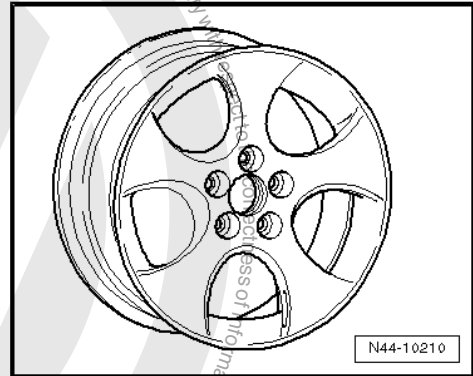

1K0 601 025 AT, 1K0 601 025 CC - Wheel and tyre combination ⇒ [page 197](#)

Only for vehicles with sports running gear and rear axle camber of -1°45'


Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

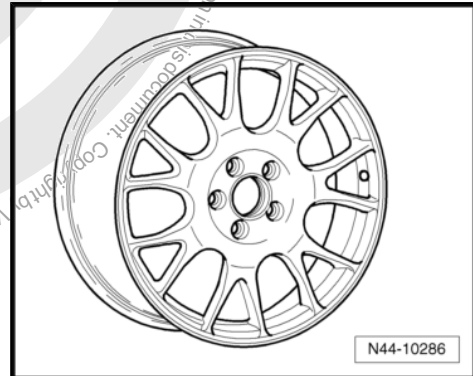

1K0 601 025 BA - Wheel and tyre combination ⇒ [page 197](#)

Only for vehicles with sports running gear and rear axle camber of -1°45'

Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

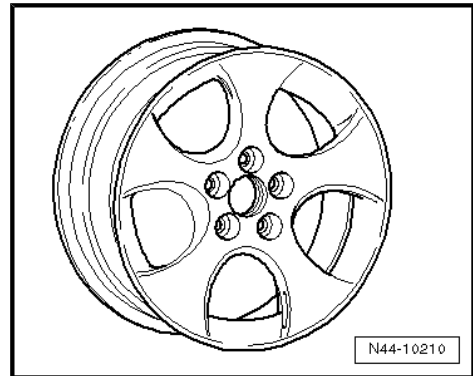




1K0 601 025 BE - Wheel and tyre combination ⇒ [page 197](#)

Only for vehicles with sports running gear and rear axle camber of -1°45'


Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

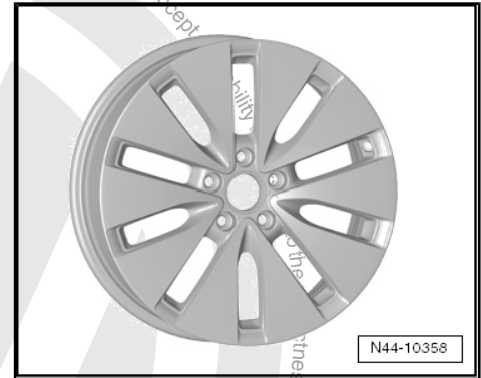

1K0 601 025 BL - Wheel and tyre combination ⇒ [page 197](#)

Only for vehicles with sports running gear and rear axle camber of -1°45'

Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

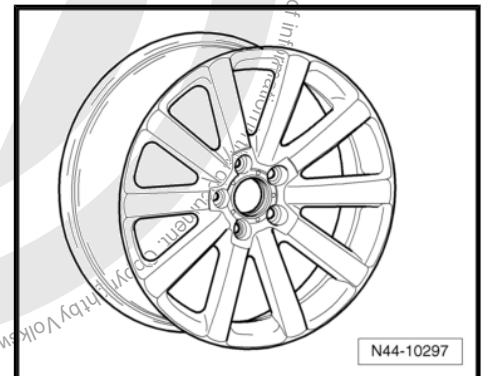



28 Golf BlueMotion model year 2008 to model year 2009

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of only genuine Volkswagen spare parts. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

28.1 Golf BlueMotion, type 1K model year 2008 to model year 2009

Attachment to parts certificate 2066/08

The parts certificate can be found on the Volkswagen ServiceNet under Technology; Guides; Wheels and Tyres Guide.

Type approval number: e1*2001/116*0242*22 to e1*2001/116*0242*24

Overview

Model engine output	Tyres	Tyre size	Wheel rim	Offset in mm	Snow chains	Remarks
1.9l 77 kW TDI diesel engine	Standard tyres	195/65 R 15 91T	6 J x 15 ⇒ page 217	47	Yes	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
	Modification	195/65 R 15 91H/V	6 J x 15 ⇒ page 217	47	Yes	Tyre makes recommended by Volkswagen: ♦ Summer tyres ⇒ page 467 ♦ Winter tyres ⇒ page 494
		195/65 R 15 91T/H/V	6 1/2 J x 15 ⇒ page 218	50	Yes	
		205/60 R 15 91T/H/V	6 J x 15 ⇒ page 217	47	Yes	
		205/55 R 16 91T/H/V/ W	6 1/2 J x 16 ⇒ page 219	50	No	
	Winter tyres	195/65 R 15 91Q/T/H	6 J x 15 ⇒ page 203	47	Yes	

Tyre inflation pressures are located on a sticker on inside of fuel tank flap or in ⇒ Maintenance ; Booklet ; Check tyres: condition, profile, inflation pressure, depth of tread .


28.2 Wheel allocation for Golf BlueMotion, type 1K model year 2008 to model year 2009

Explanation of information on wheels ⇒ [page 57](#)

Torque specifications for wheel bolts ⇒ Running gear, axles, steering; Rep. gr. 44 ; Torque specifications for fitting wheels

Pitch circle diameter: 112 mm
Number of wheel bolt holes: 5


28.2.1 6 J x 15

 **Caution**

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 216](#) .

1K0 601 027 C, 1K0 601 027 H - Wheel and tyre combination
⇒ [page 216](#)


Size:	6 J x 15
Wheel offset in mm:	47
Wheel load in kg:	615

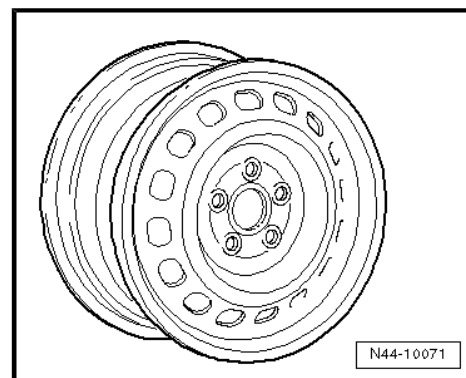




1K0 601 027 T - Wheel and tyre combination ⇒ page 216

Size:	6 J x 15
Wheel offset in mm:	47
Wheel load in kg:	615

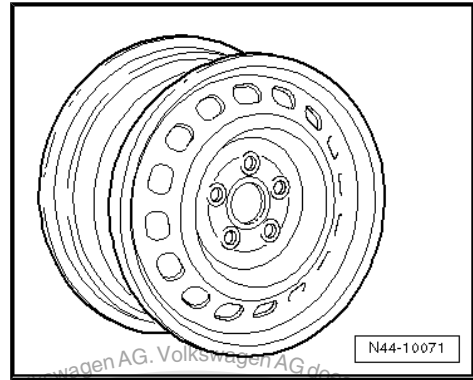

2K0 601 027 - Wheel and tyre combination ⇒ page 216

Size:	6 J x 15
Wheel offset in mm:	47
Wheel load in kg:	650

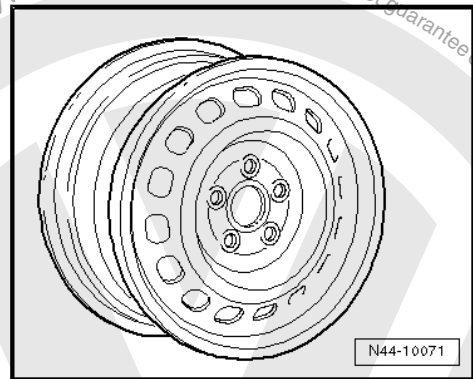

28.2.2 6 1/2 J x 15




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 216 .


1K0 601 025 A - Wheel and tyre combination ⇒ page 217

Size:	6 1/2 J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

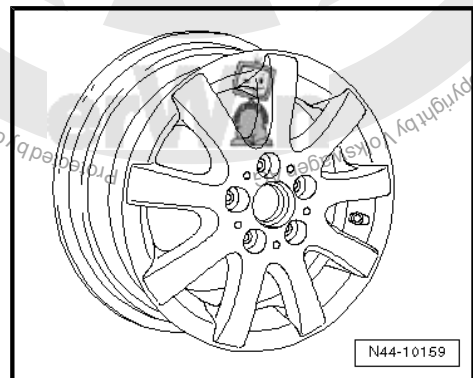

1K0 601 025 AK - Wheel and tyre combination ⇒ page 217


Size:	6 1/2 J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

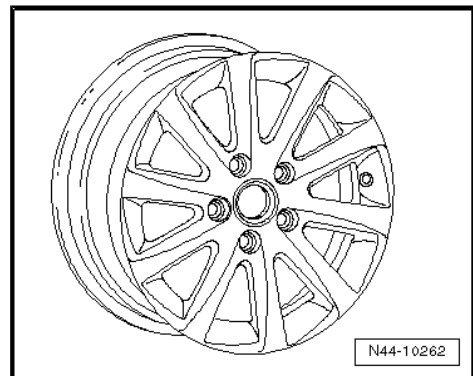




1K0 601 025 AQ - Wheel and tyre combination ⇒ page 217

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

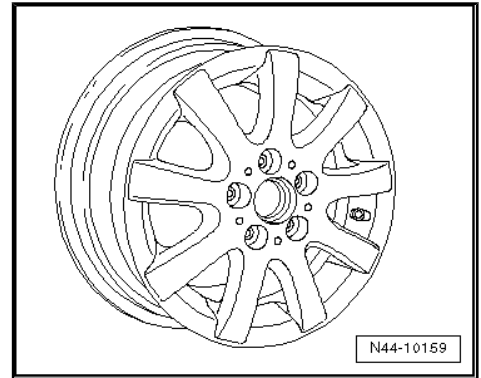

1K0 601 025 CA - Wheel and tyre combination ⇒ page 217

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

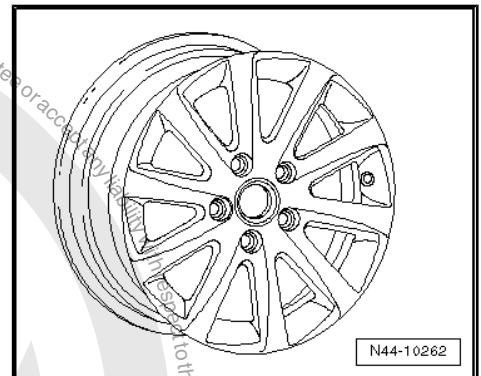


28.2.3 6¹/₂ J x 16

⚠ Caution
Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 216 .


1K0 601 027 A - Wheel and tyre combination ⇒ page 217

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

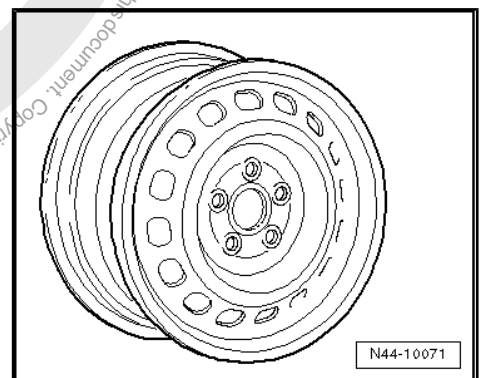

1K0 601 027 J - Wheel and tyre combination ⇒ page 217


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

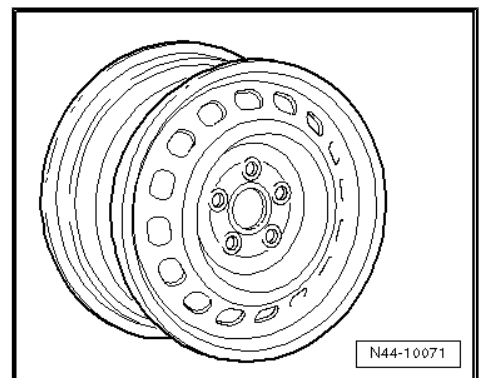




1K0 601 025 AJ - Wheel and tyre combination ⇒ [page 217](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

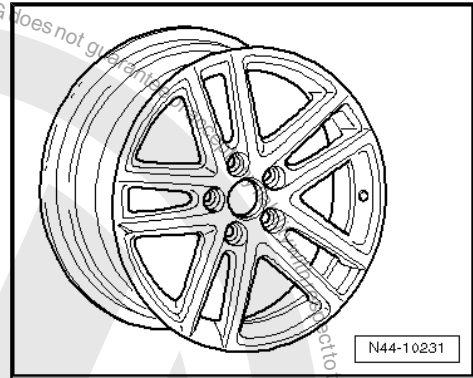


1K0 601 025 BC - Wheel and tyre combination ⇒ [page 217](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

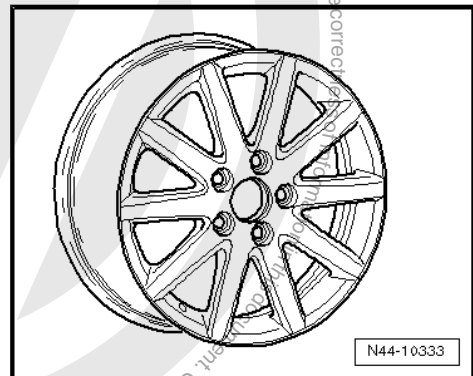

1K0 601 025 BM - Wheel and tyre combination ⇒ [page 217](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

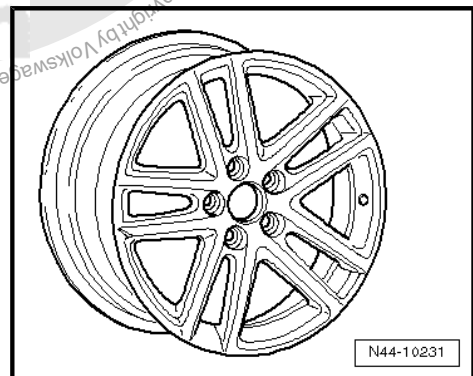

1K0 601 025 BR - Wheel and tyre combination ⇒ [page 217](#)


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615






1K0 601 025 BS - Wheel and tyre combination ⇒ page 217

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

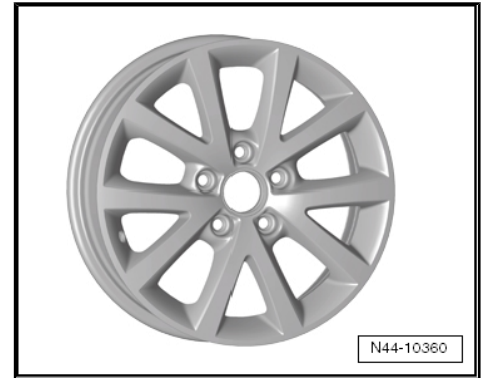


1K0 601 025 CB - Wheel and tyre combination ⇒ page 217

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

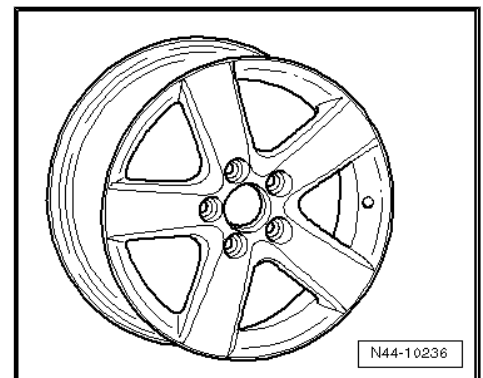


1K0 601 025 CG - Wheel and tyre combination ⇒ page 217

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

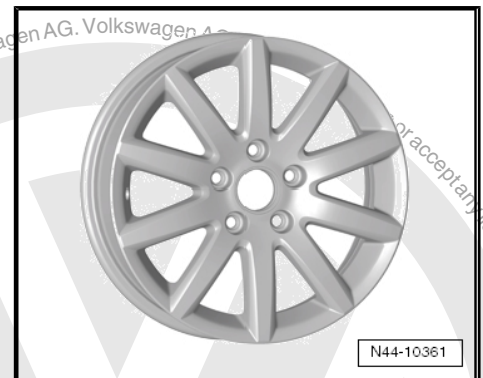

1T0 601 025 C - Wheel and tyre combination ⇒ page 217


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

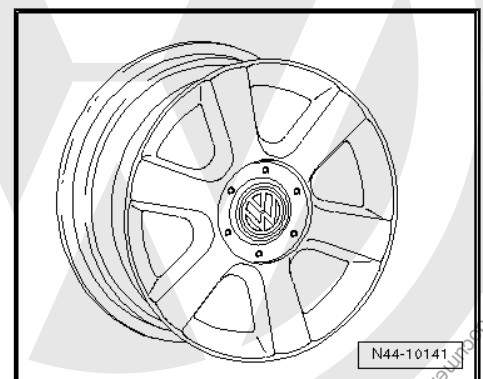




1K0 601 025 F - Wheel and tyre combination ⇒ page 217

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

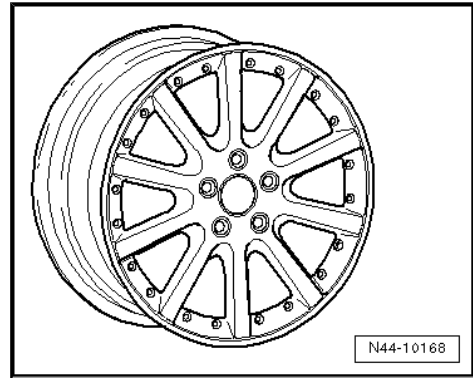


1K0 601 025 P - Wheel and tyre combination ⇒ page 217

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

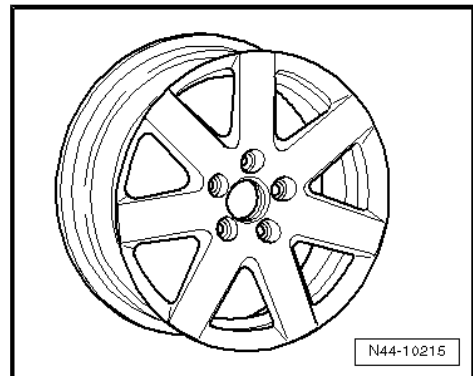


1K0 601 025 R - Wheel and tyre combination ⇒ page 217

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

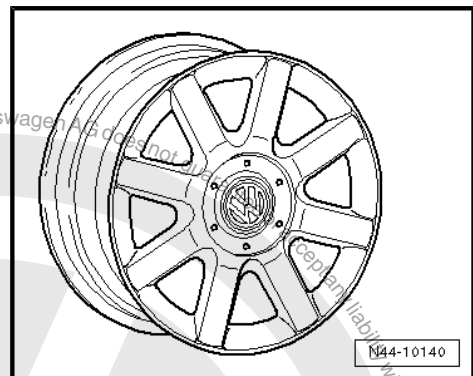

1T0 601 025 G; 1T0 601 025 K - Wheel and tyre combination ⇒ page 217


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

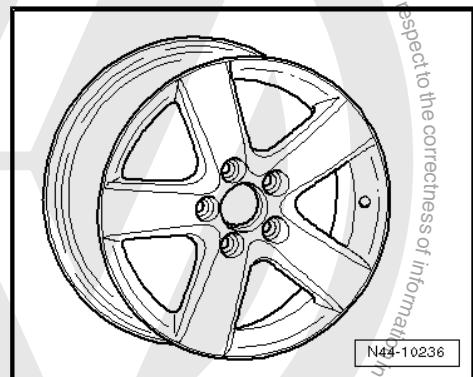




1T0 601 025 M - Wheel and tyre combination ⇒ [page 217](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

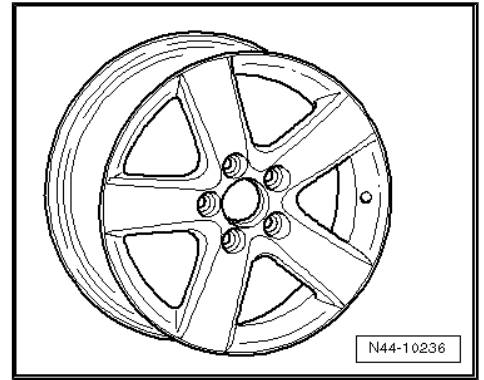

1T0 601 025 R - Wheel and tyre combination ⇒ [page 217](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

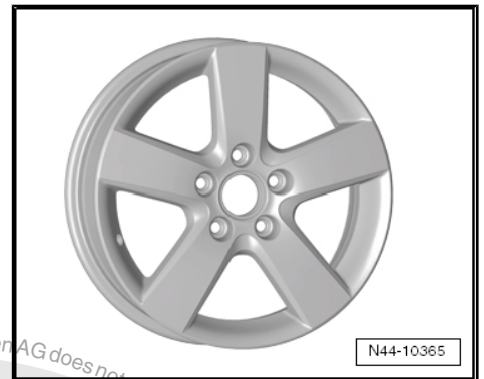




29 Golf GTI model year 2005 to model year 2009

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of only genuine Volkswagen spare parts. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.




WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

29.1 Golf GTI, type 1K model year 2005 to model year 2008

Attachment to parts certificate 2066/08

The parts certificate can be found on the Volkswagen ServiceNet under Technology; Guides; Wheels and Tyres Guide.

Type Approval No.: e1*2001/116*0242*07 to e1*2001/116*0242*22

Overview

Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
2.0l 147 kW; 2.0l 169 kW; petrol engine	Standard tyres	225/45 R 17 91W	7 1/2 J x 17 ⇒ page 234	51	No	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
	Modification	205/55 R 16 91W	6 ¹ / ₂ J x 16 ⇒ page 227	50	No	Tyre makes recommended by Volkswagen: ♦ Summer tyres ⇒ page 468 ♦ Winter tyres ⇒ page 495
		225/45 R 17 91W	7 J x 17 ⇒ page 232	54	No	
		225/40 R 18 92Y	7 ¹ / ₂ J x 18 ⇒ page 235	51	No	
	Winter tyres	205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 227	50	Yes	* Only snow chains with fine links of no more than 8 mm may be used ⇒ page 225 .
		205/50 R 17 93Q/T/H	6 J x 17 ⇒ page 231	48.5	Yes* ⇒ page 225	

Tyre inflation pressures are located on a sticker on inside of fuel tank flap or in ⇒ Maintenance ; Booklet ; Check tyres: condition profile, inflation pressure, depth of tread .

Approved snow chains for 6 J x 17 offset 48.5 wheel rim

The following snow chains are only permissible in combination with the adjacent wheel and tyre combination!

Chain manufacturer Item no.	Accessory part number	Tyre size	Wheel rim	Part no.
Ottinger 100 956	-	205/50 R 17 93Q/T/H	6 J x 17 offset 48.5	1K0 601 025 N

29.2 Golf GTI, type 1K model year 2009

Attachment to parts certificate 2066/08

The parts certificate can be found on the Volkswagen ServiceNet under Technology; Guides; Wheels and Tyres Guide.

Type approval number: e1*2001/116*0242*23 to e1*2001/116*0242*24

Overview

Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
2.0l 147 kW; petrol engine	Standard tyres	225/45 R 17 91V	7 ¹ / ₂ J x 17 ⇒ page 234	51	No	General information on: ♦ Winter tyres ⇒ page 14 ♦ Snow chains ⇒ page 17



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
	Modification	205/55 R 16 91V	6 ¹ / ₂ J x 16 ⇒ page 227	50	No	Tyre makes recommended by Volkswagen: ♦ Summer tyres ⇒ page 468 ♦ Winter tyres ⇒ page 495 * Only snow chains with fine links of no more than 8 mm may be used ⇒ page 226 .
		225/45 R 17 91V	7 J x 17 ⇒ page 232	54	No	
		225/40 R 18 92Y	7 ¹ / ₂ J x 18 ⇒ page 235	51	No	
	Winter tyres	205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 227	50	Yes	
		205/50 R 17 93Q/T/H	6 J x 17 ⇒ page 231	48.5	Yes* ⇒ page 226	
2.0l 169 kW; petrol engine	Standard tyres	225/45 R 17 91W	7 ¹ / ₂ J x 17 ⇒ page 234	51	No	
	Modification	205/55 R 16 91W	6 ¹ / ₂ J x 16 ⇒ page 227	50	No	
		225/45 R 17 91W	7 J x 17 ⇒ page 232	54	No	
		225/40 R 18 92Y	7 ¹ / ₂ J x 18 ⇒ page 235	51	No	
	Winter tyres	205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 227	50	Yes	
		205/50 R 17 93Q/T/H	6 J x 17 ⇒ page 231	48.5	Yes* ⇒ page 226	

Tyre inflation pressures are located on a sticker on inside of fuel tank flap or in ⇒ Maintenance ; Booklet ; Check tyres: condition, profile, inflation pressure, depth of tread .

Approved snow chains for 6 J x 17 offset 48.5 wheel rim

The following snow chains are only permissible in combination with the adjacent wheel and tyre combination!

Chain manufacturer Item no.	Accessory part number	Tyre size	Wheel rim	Part no.
Ottinger 100 956	-	205/50 R 17 93Q/T/H	6 J x 17 offset 48.5	1K0 601 025 N




29.3 Wheel allocation for Golf GTI, type 1K model year 2005 to model year 2009

Explanation of information on wheels ⇒ [page 57](#)

Torque settings for wheel bolts ⇒ Running gear, axles, steering;
 Rep. gr. 44 ; Torque settings for fitting wheels

Pitch circle diameter: 112 mm
 Number of wheel bolt holes: 5

29.3.1 6 J x 16



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 224](#) .

Winter wheels

8P0 601 027 - Wheel and tyre combination ⇒ [page 225](#)



Size:	6 J x 16
Wheel offset in mm:	50
Wheel load in kg:	600

Use the following wheel bolt caps for wheel bolts:


- ◆ 1K0.601.173 (4 per wheel)
- ◆ 1K0.601.173.A (1 per wheel)

1K0 601 025 Q - Wheel and tyre combination ⇒ [page 225](#)

Size:	6 J x 16 EH2 ⇒ page 57
Wheel offset in mm:	50
Wheel load in kg:	615

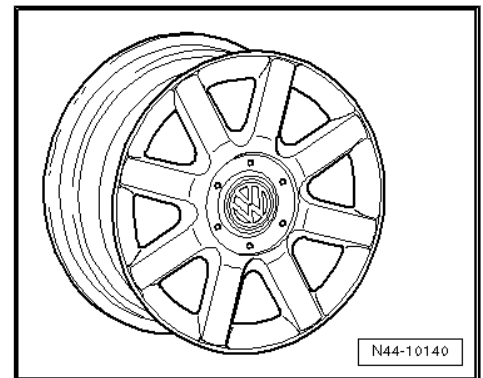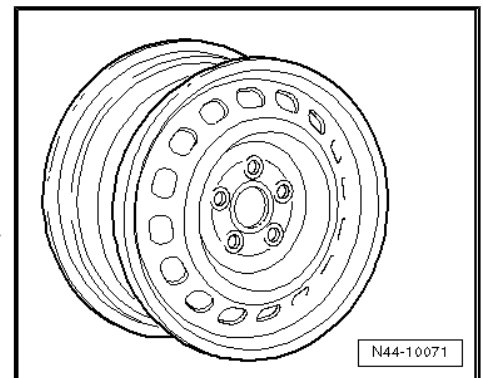

29.3.2 6 1/2 J x 16




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 224](#) .




1K0 601 027 A - Wheel and tyre combination ⇒ page 225

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

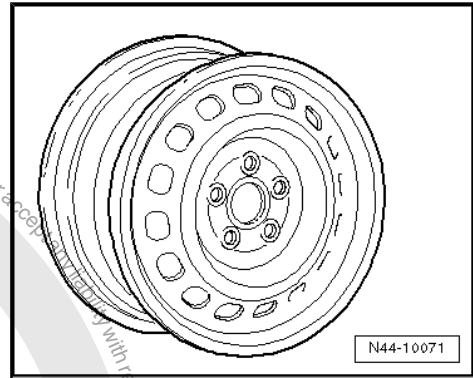


1K0 601 027 J - Wheel and tyre combination ⇒ page 225

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

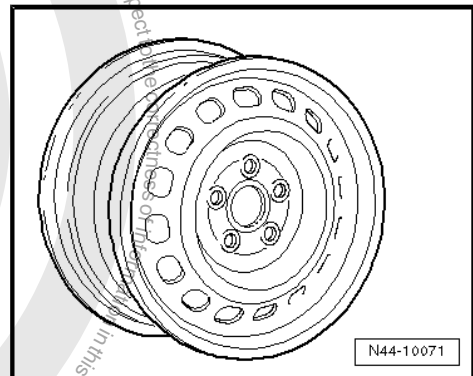


1K0 601 025 AJ - Wheel and tyre combination ⇒ page 225

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

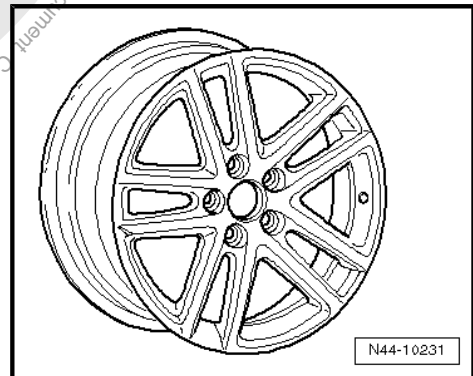

1K0 601 025 BC - Wheel and tyre combination ⇒ page 225


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

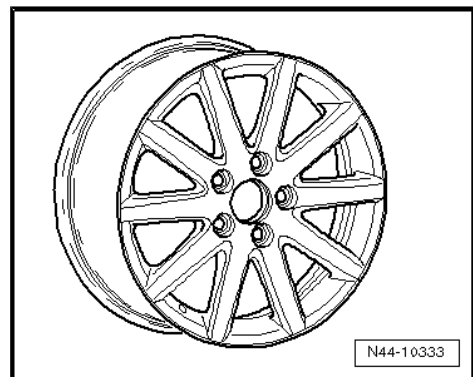



1K0 601 025 BM - Wheel and tyre combination ⇒ [page 225](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

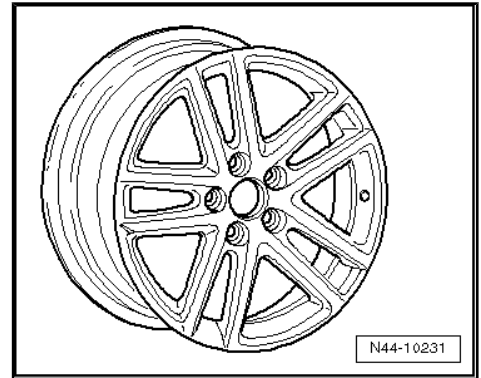


1K0 601 025 BR - Wheel and tyre combination ⇒ [page 225](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615




1K0 601 025 BS - Wheel and tyre combination ⇒ [page 225](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

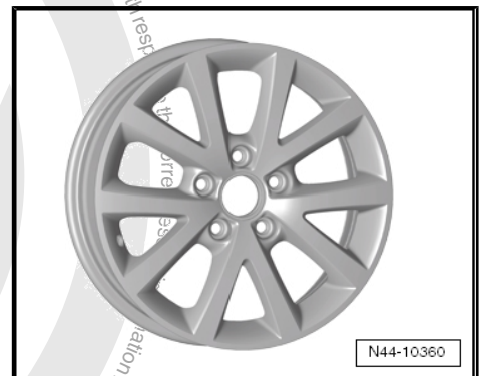

1K0 601 025 CB - Wheel and tyre combination ⇒ [page 225](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

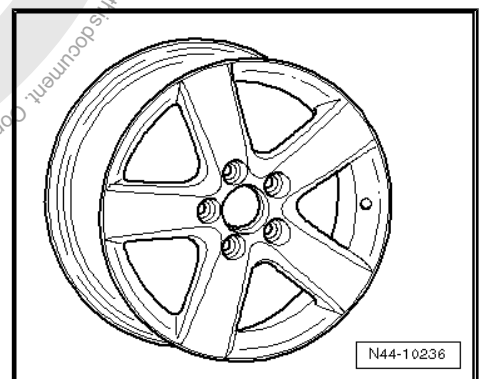




1K0 601 025 CG - Wheel and tyre combination ⇒ page 225

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615




1K0 601 025 P - Wheel and tyre combination ⇒ page 225

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

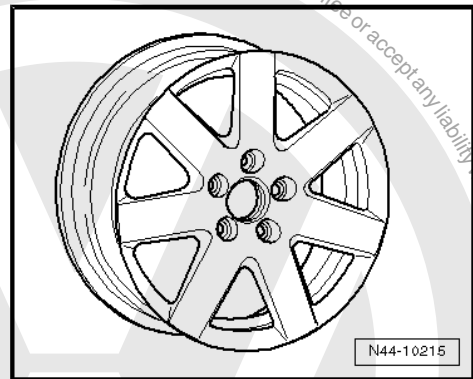


1K0 601 025 R - Wheel and tyre combination ⇒ page 225

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

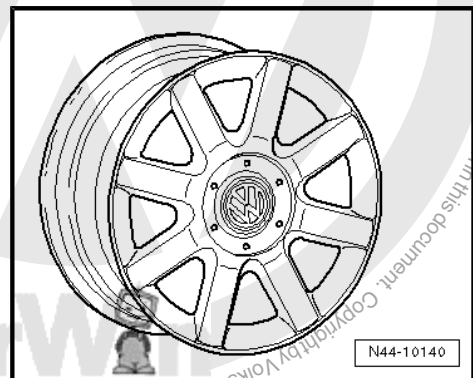

1T0 601 025 C - Wheel and tyre combination ⇒ page 225


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

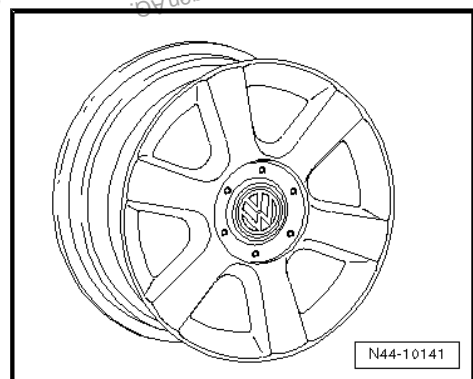




1T0 601 025 G; 1T0 601 025 K - Wheel and tyre combination
⇒ [page 225](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

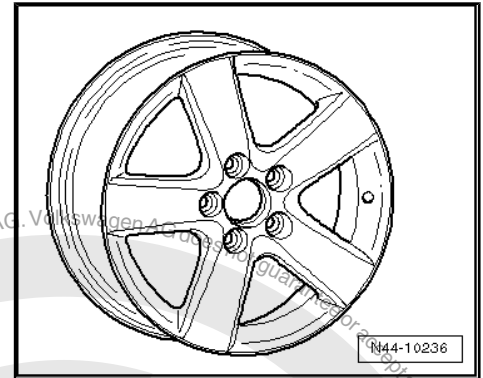

1T0 601 025 M - Wheel and tyre combination ⇒ [page 225](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

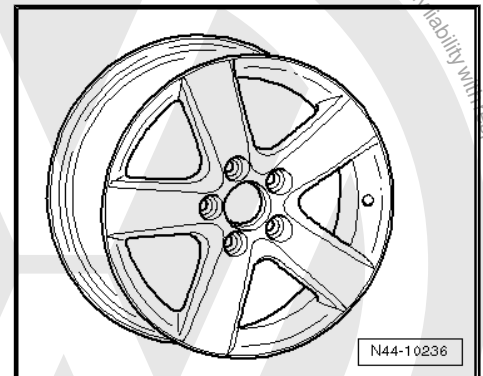

1T0 601 025 R - Wheel and tyre combination ⇒ [page 225](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615



29.3.3 6 J x 17



Caution


Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 224](#) .



Winter wheel

1K0 601 025 N - Wheel and tyre combination ⇒ page 225

Size:	6 J x 17
Wheel offset in mm:	48.5
Wheel load in kg:	615

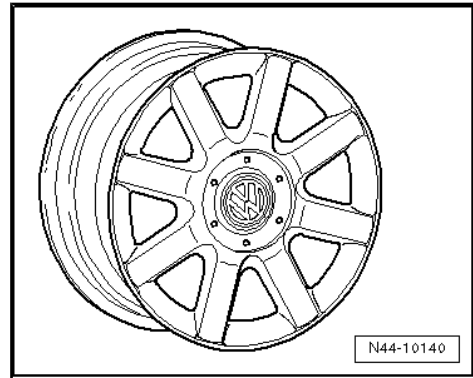

29.3.4 7 J x 17




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 224 .


1K0 601 025 B - Wheel and tyre combination ⇒ page 225

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

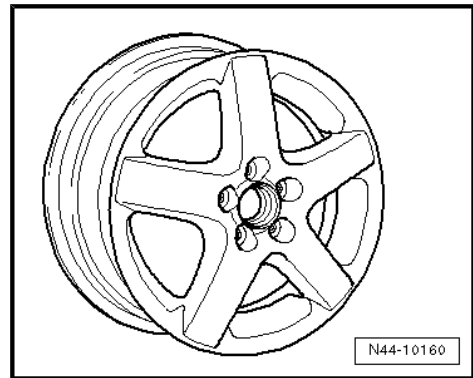

1K0 601 025 C - Wheel and tyre combination ⇒ page 225

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

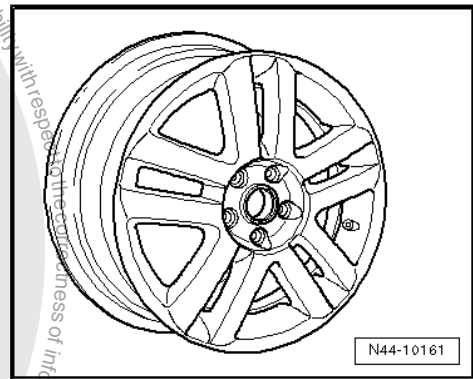


Protected by copyright. Copying for private or commercial purposes, in part or in full, is not permitted unless authorised by Volkswagen AG. Volkswagen AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by Volkswagen AG.






1K0 601 025 J - Wheel and tyre combination ⇒ page 225

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

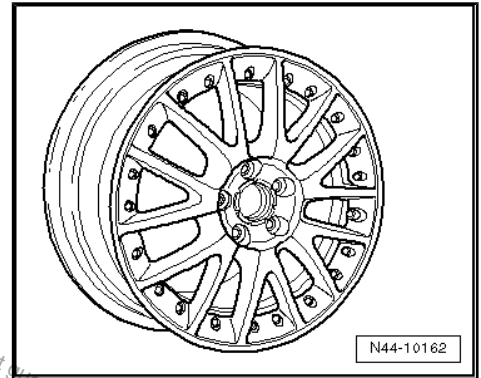


1K0 601 025 K - Wheel and tyre combination ⇒ page 225

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

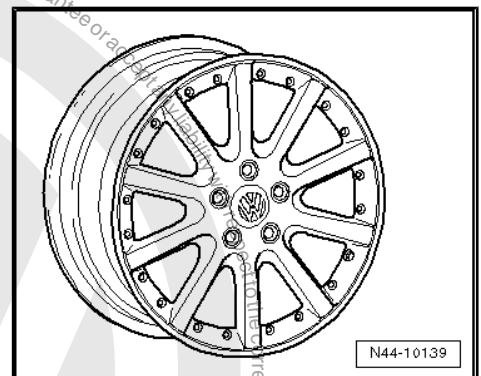


1K0 601 025 M - Wheel and tyre combination ⇒ page 225

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

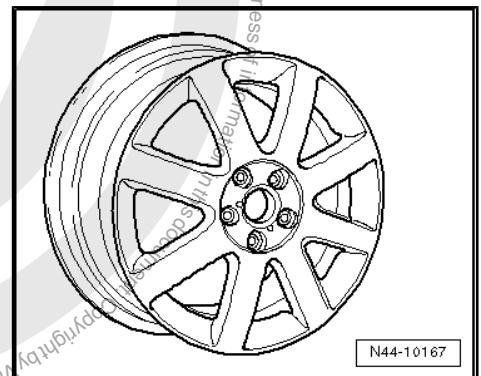

1K0 601 025 T - Wheel and tyre combination ⇒ page 225


Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

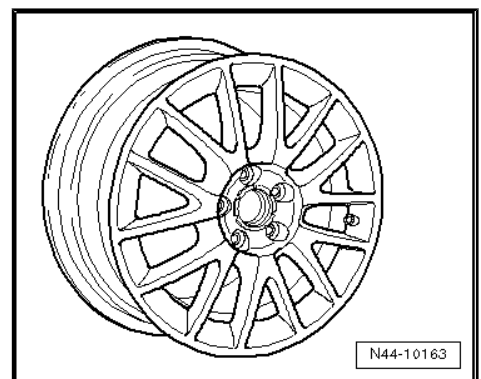




1K0 601 025 AF - Wheel and tyre combination ⇒ page 225

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	630

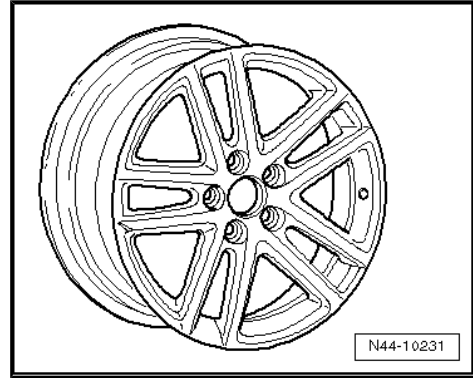


1K0 601 025 AE - Wheel and tyre combination ⇒ page 225

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	630

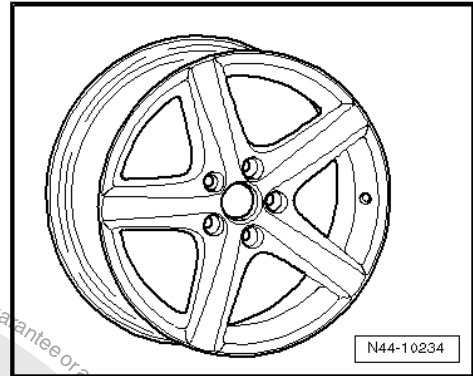

1K0 601 025 AN - Wheel and tyre combination ⇒ page 225

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

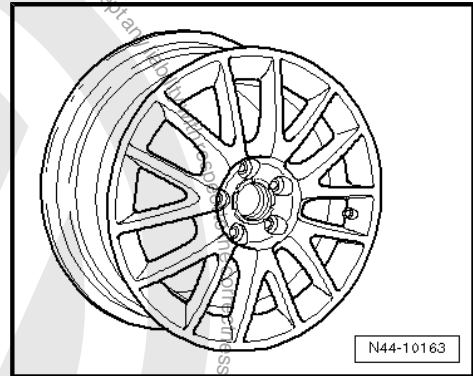

29.3.5 7 1/2 J x 17




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 224 .

1K0 601 025 AC - Wheel and tyre combination ⇒ page 224


Size:	7 1/2 J x 17
Wheel offset in mm:	51
Wheel load in kg:	615

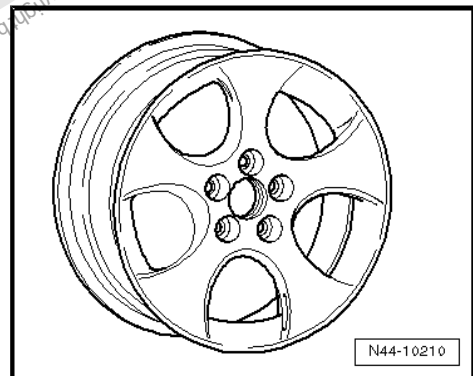




1K0 601 025 BB - Wheel and tyre combination ⇒ page 224

Size:	7 ¹ / ₂ J x 17
Wheel offset in mm:	51
Wheel load in kg:	615

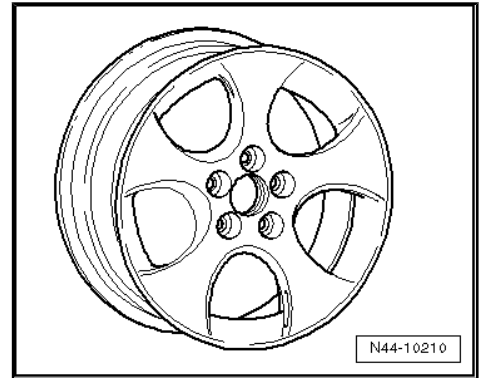


1K0 601 025 BK - Wheel and tyre combination ⇒ page 224

Size:	7 ¹ / ₂ J x 17
Wheel offset in mm:	51
Wheel load in kg:	615

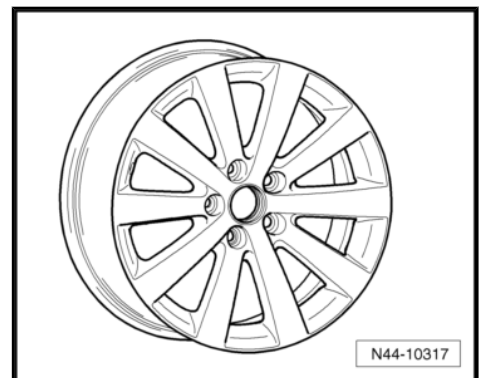


29.3.6 7¹/₂ J x 18

 **Caution**
Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 224 .


1K0 601 025 AD - Wheel and tyre combination ⇒ page 225

Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	630

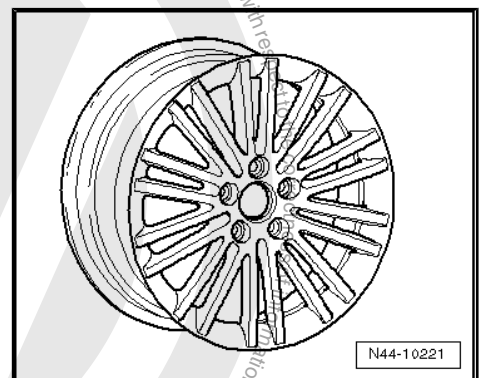

1K0 601 025 AG - Wheel and tyre combination ⇒ page 225


Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	630

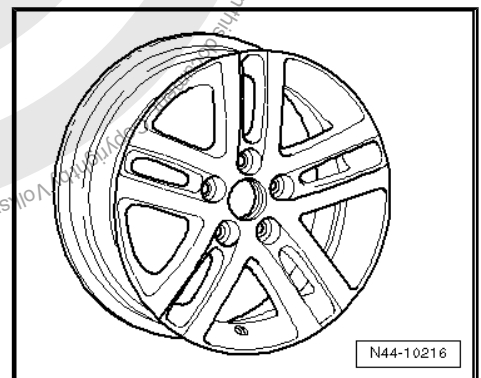




1K0 601 025 AH - Wheel and tyre combination ⇒ [page 225](#)

Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

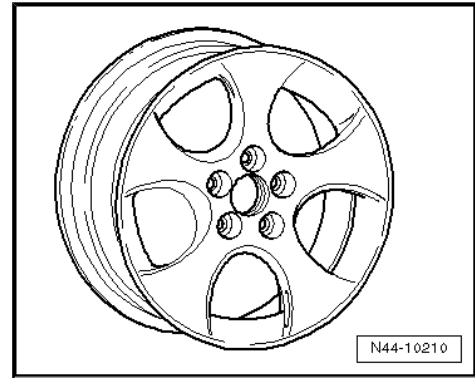


1K0 601 025 AM - Wheel and tyre combination ⇒ [page 225](#)

Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

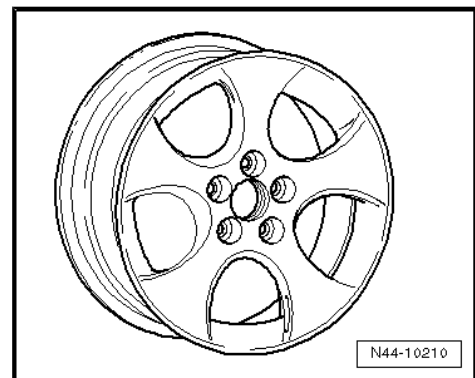


1K0 601 025 AT, 1K0 601 025 CC - Wheel and tyre combination ⇒ [page 225](#)

Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

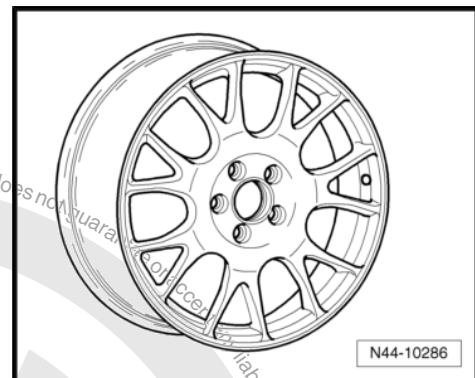

1K0 601 025 BA - Wheel and tyre combination ⇒ [page 225](#)


Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

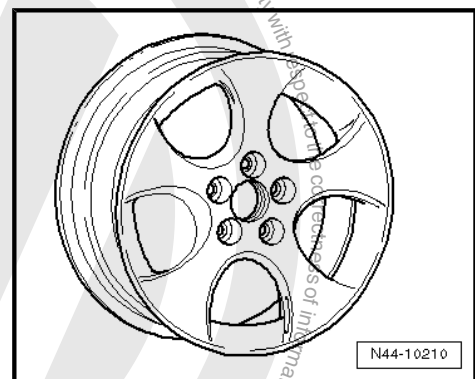




1K0 601 025 BE - Wheel and tyre combination ⇒ [page 225](#)

Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

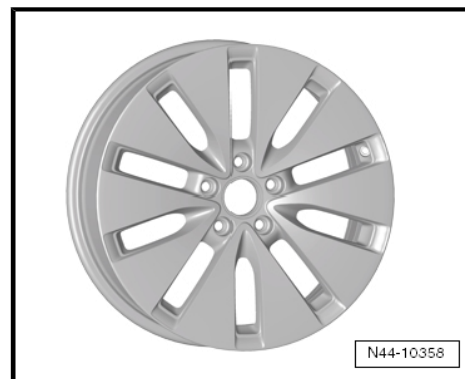

1K0 601 025 BL - Wheel and tyre combination ⇒ [page 225](#)

Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

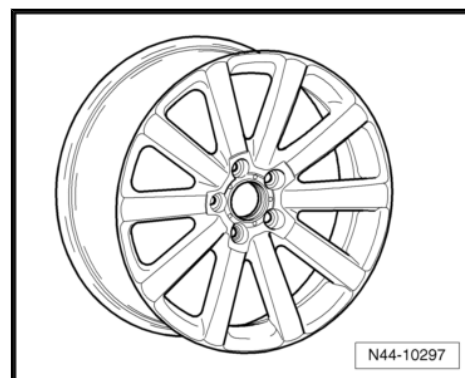



30 **Pirelli Golf model year 2008 to model year 2009**

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of only genuine Volkswagen spare parts. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

30.1 **Pirelli Golf, type 1K model year 2008 to model year 2009**

Attachment to parts certificate 2066/08

The parts certificate can be found on the Volkswagen ServiceNet under Technology; Guides; Wheels and Tyres Guide.

Type approval number: e1*2001/116*0242*20 to e1*2001/116*0242*24

Overview

Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
2.0l 169 kW; petrol engine	Standard tyres	225/40 R 18 92Y	7 1/2 J x 18 ⇒ page 248	51	No	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
	Modification	205/55 R 16 91W	6 ¹ / ₂ J x 16 ⇒ page 240	50	No	Tyre makes recommended by Volkswagen: ♦ Summer tyres ⇒ page 468 ♦ Winter tyres ⇒ page 495
		225/45 R 17 91W	7 J x 17 ⇒ page 244	54	No	
		225/45 R 17 91W	7 ¹ / ₂ J x 17 ⇒ page 247	51	No	
	Winter tyres	205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 239	50	Yes	* Only snow chains with fine links of no more than 8 mm may be used ⇒ page 239 .
		205/50 R 17 93Q/T/H	6 J x 17 ⇒ page 244	48.5	Yes* ⇒ page 239	

Tyre inflation pressures are located on a sticker on inside of fuel tank flap or in ⇒ Maintenance ; Booklet ; Check tyres: condition, profile, inflation pressure, depth of tread .

Approved snow chains for 6 J x 17 offset 48.5 wheel rim

The following snow chains are only permissible in combination with the adjacent wheel and tyre combination!

Chain manufacturer Item no.	Accessory part number	Tyre size	Wheel rim	Part no.
Ottinger 100 956	-	205/50 R 17 93Q/T/H	6 J x 17 offset 48.5	1K0 601 025 N

30.2 Wheel allocation for Pirelli Golf, type 1K model year 2008 to model year 2009

Explanation of information on wheels ⇒ [page 57](#)

Torque settings for wheel bolts ⇒ Running gear, axles, steering; Rep. gr. 44 ; Torque settings for fitting wheels

Pitch circle diameter: 112 mm

Number of wheel bolt holes: 5

30.2.1 6 J x 16



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 238](#) .




Winter wheels

8P0 601 027 - Wheel and tyre combination ⇒ [page 239](#)

Size:	6 J x 16
Wheel offset in mm:	50
Wheel load in kg:	600


Use the following wheel bolt caps for wheel bolts:

- ◆ 1K0.601.173 (4 per wheel)
- ◆ 1K0.601.173.A (1 per wheel)

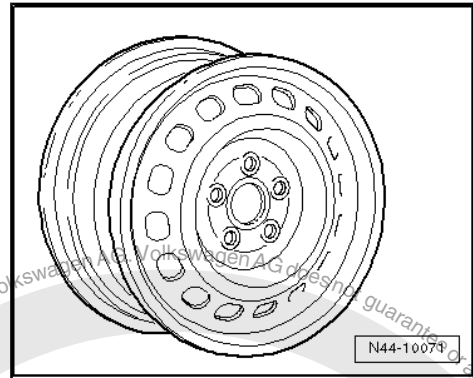

1K0 601 025 Q - Wheel and tyre combination ⇒ [page 239](#)

Size:	6 J x 16 EH2 ⇒ page 57
Wheel offset in mm:	50
Wheel load in kg:	615

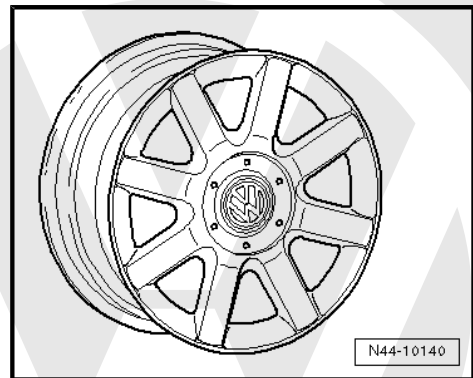

30.2.2 6¹/₂ J x 16




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 238](#) .

1K0 601 027 A - Wheel and tyre combination ⇒ [page 239](#)


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

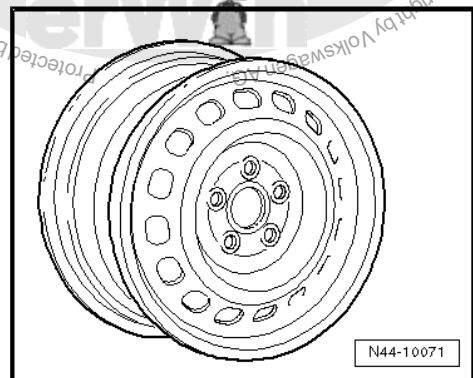




1K0 601 027 J - Wheel and tyre combination ⇒ page 239

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

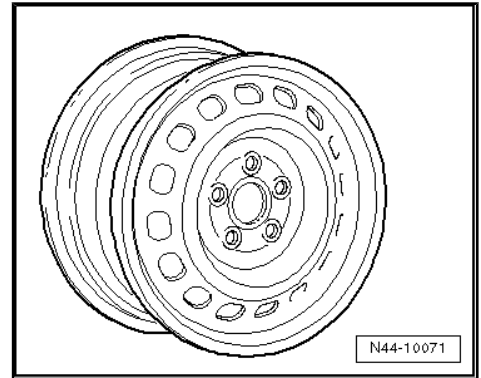


1K0 601 025 AJ - Wheel and tyre combination ⇒ page 239

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

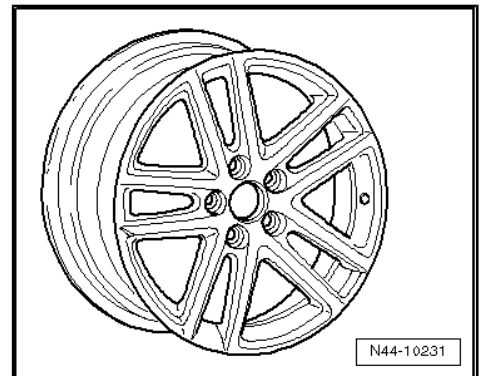


1K0 601 025 BC - Wheel and tyre combination ⇒ page 239

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

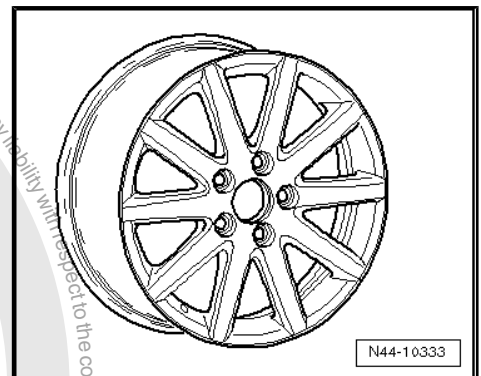

1K0 601 025 BM - Wheel and tyre combination ⇒ page 239

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

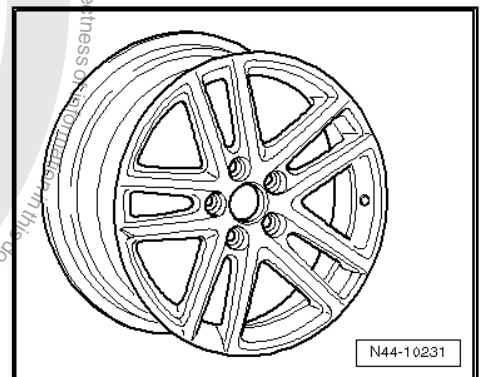

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted without the express authorisation of Volkswagen AG. Volkswagen AG does not guarantee or accept any liability with respect to the correctness or completeness of the information in this document.



1K0 601 025 BR - Wheel and tyre combination ⇒ [page 239](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615




1K0 601 025 BS - Wheel and tyre combination ⇒ [page 239](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615




1K0 601 025 CB - Wheel and tyre combination ⇒ [page 239](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

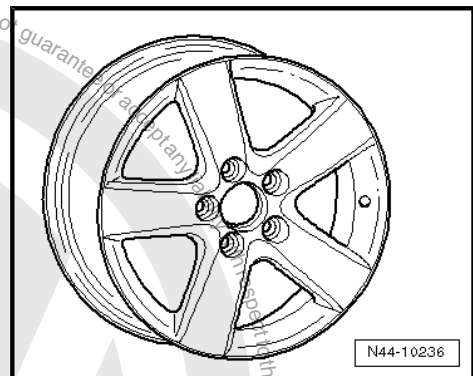

1K0 601 025 CG - Wheel and tyre combination ⇒ [page 239](#)


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

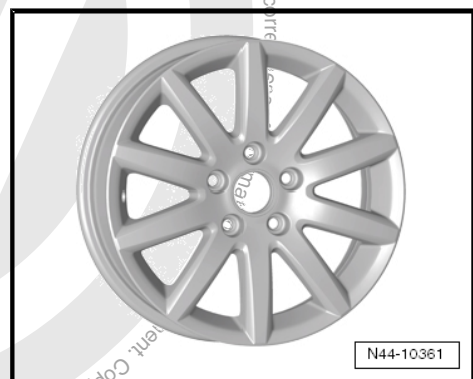




1K0 601 025 P - Wheel and tyre combination ⇒ page 239

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

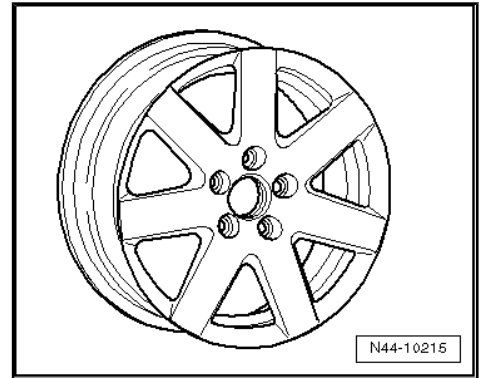


1K0 601 025 R - Wheel and tyre combination ⇒ page 239

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

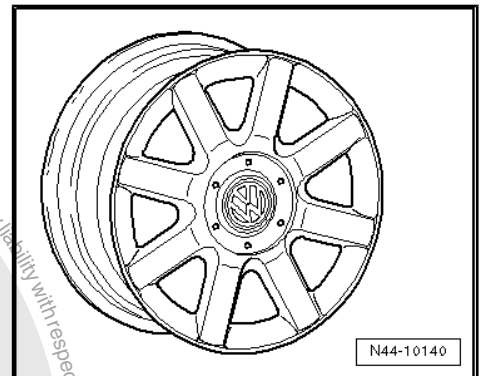


1T0 601 025 C - Wheel and tyre combination ⇒ page 239

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

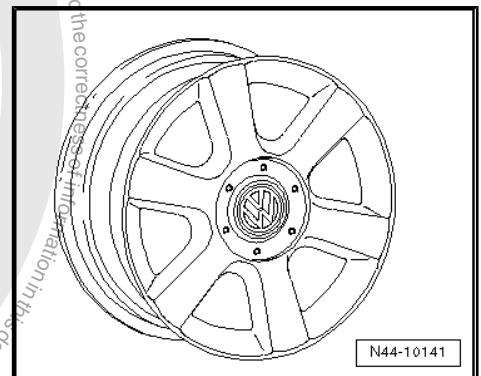

1T0 601 025 G; 1T0 601 025 K - Wheel and tyre combination ⇒ page 239


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

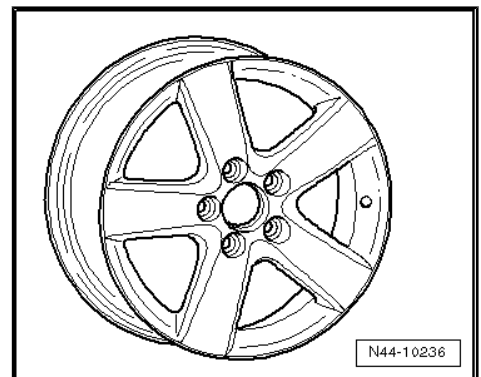




1T0 601 025 M - Wheel and tyre combination ⇒ page 239

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

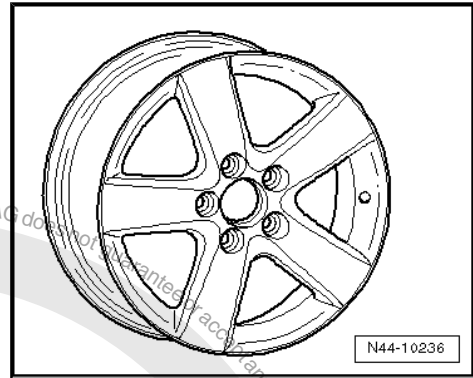

1T0 601 025 R - Wheel and tyre combination ⇒ page 239

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

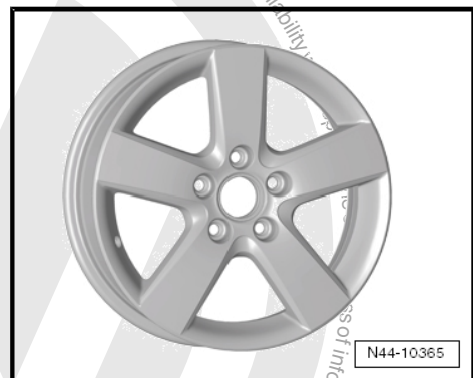

30.2.3 6 J x 17




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 238 .

Winter wheel

1K0 601 025 N - Wheel and tyre combination ⇒ page 239

Size:	6 J x 17
Wheel offset in mm:	48.5
Wheel load in kg:	615

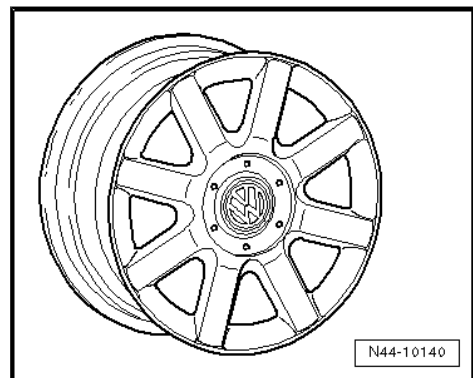

30.2.4 7 J x 17




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 238 .




1K0 601 025 B - Wheel and tyre combination ⇒ [page 239](#)

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

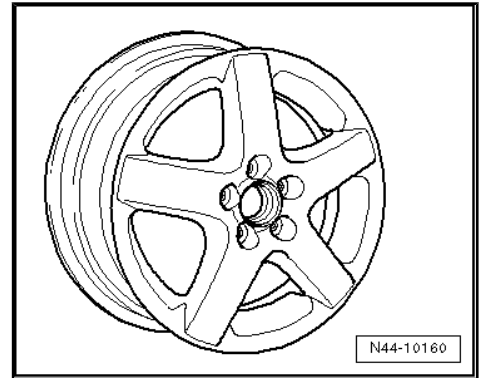


1K0 601 025 C - Wheel and tyre combination ⇒ [page 239](#)

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

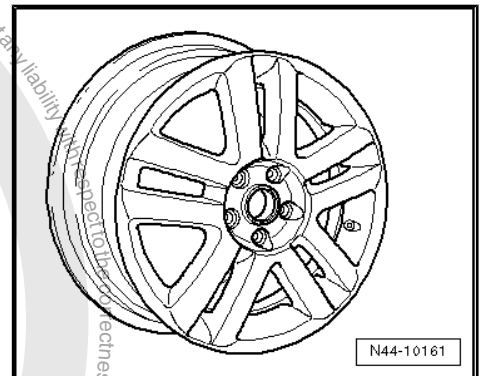


1K0 601 025 J - Wheel and tyre combination ⇒ [page 239](#)

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

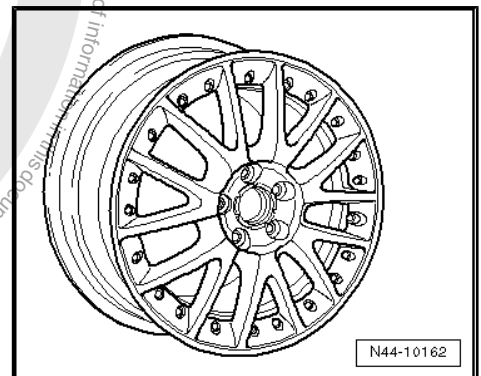

1K0 601 025 K - Wheel and tyre combination ⇒ [page 239](#)


Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

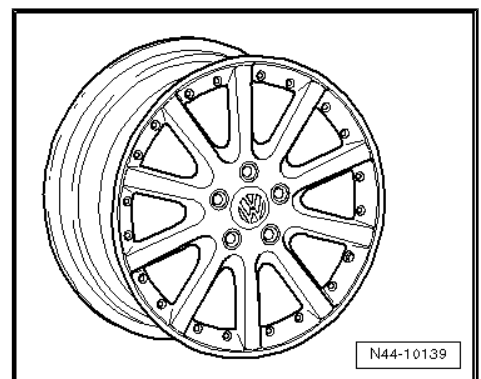




1K0 601 025 M - Wheel and tyre combination ⇒ [page 239](#)

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

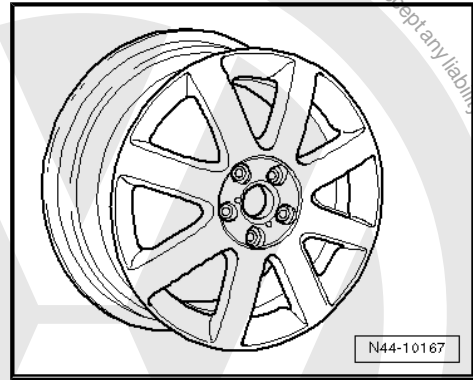


1K0 601 025 T - Wheel and tyre combination ⇒ [page 239](#)

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

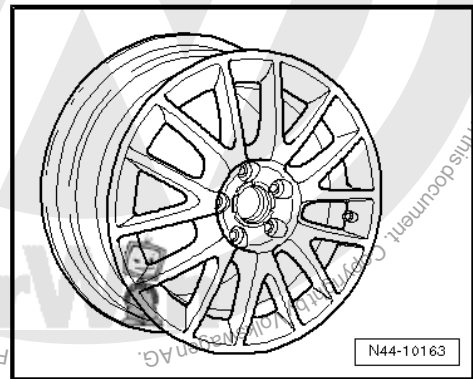


1K0 601 025 AF - Wheel and tyre combination ⇒ [page 239](#)

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	630

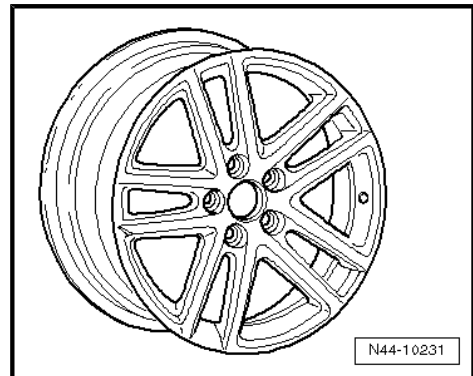

1K0 601 025 AE - Wheel and tyre combination ⇒ [page 239](#)


Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	630

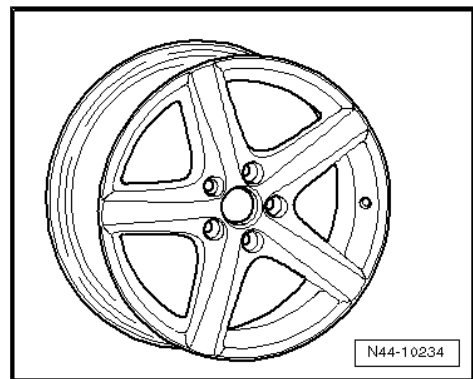



1K0 601 025 AN - Wheel and tyre combination ⇒ page 239

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

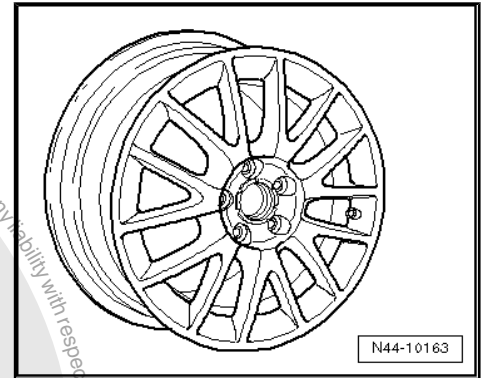


30.2.5 7¹/₂ J x 17

⚠ Caution
Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 238 .


1K0 601 025 AC - Wheel and tyre combination ⇒ page 239

Size:	7 ¹ / ₂ J x 17
Wheel offset in mm:	51
Wheel load in kg:	615

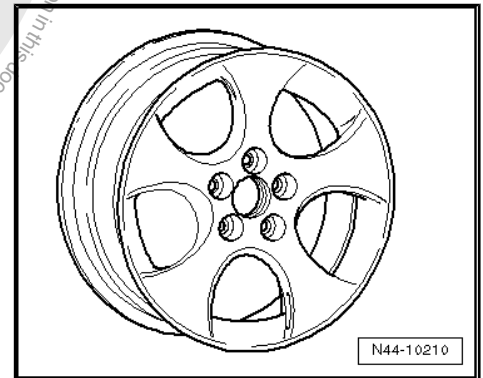


1K0 601 025 BB - Wheel and tyre combination ⇒ page 239

Size:	7 ¹ / ₂ J x 17
Wheel offset in mm:	51
Wheel load in kg:	615

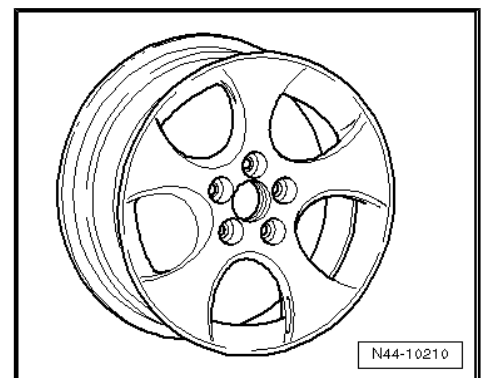

1K0 601 025 BK - Wheel and tyre combination ⇒ page 239

Size:	7 ¹ / ₂ J x 17
Wheel offset in mm:	51
Wheel load in kg:	615

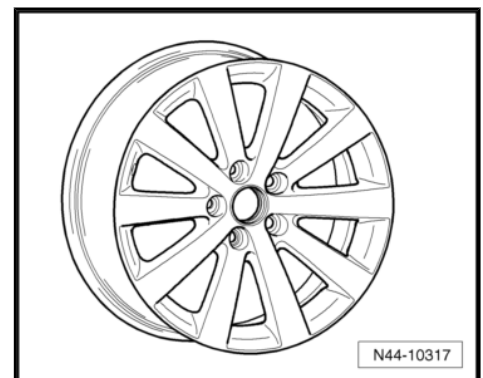



30.2.6 7¹/₂ J x 18




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 238](#).


1K0 601 025 BT - Wheel and tyre combination ⇒ [page 238](#)

Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	630

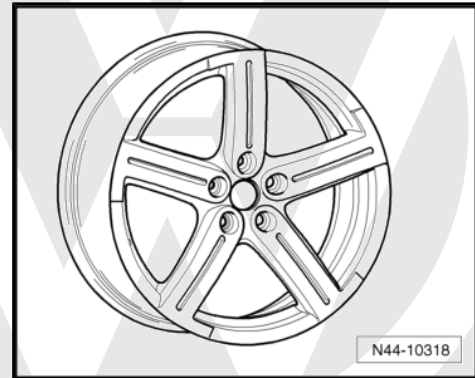


1K0 601 025 AD - Wheel and tyre combination ⇒ [page 238](#)

Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	630

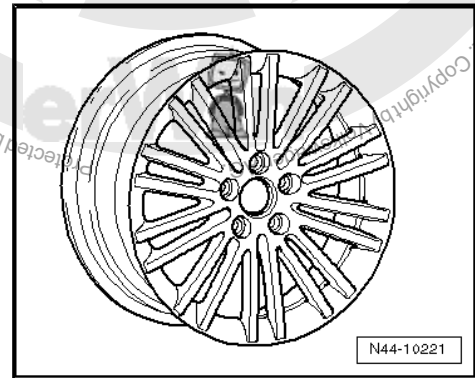


1K0 601 025 AG - Wheel and tyre combination ⇒ [page 238](#)

Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	630

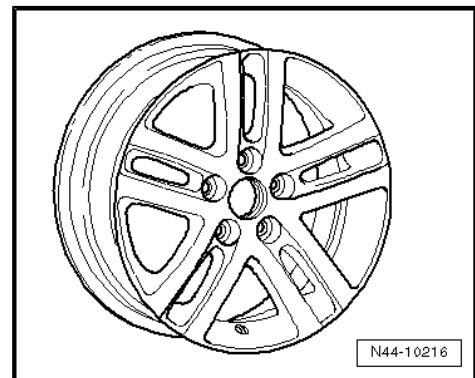

1K0 601 025 AH - Wheel and tyre combination ⇒ [page 238](#)


Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

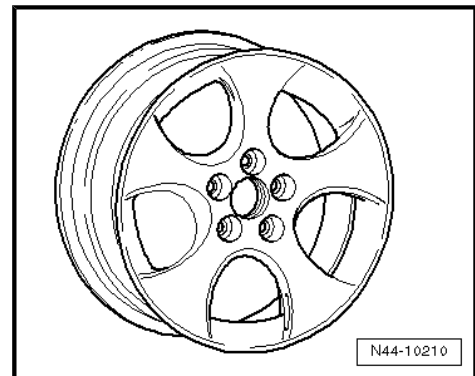




1K0 601 025 AM - Wheel and tyre combination ⇒ [page 238](#)

Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

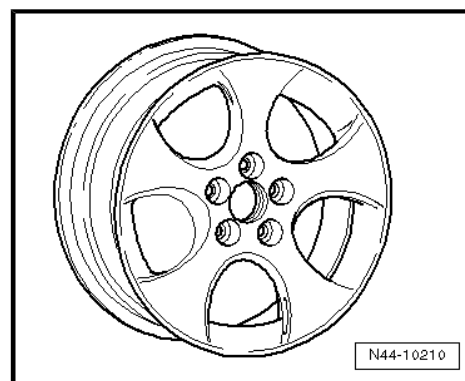


1K0 601 025 AT, 1K0 601 025 CC - Wheel and tyre combination ⇒ [page 238](#)

Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

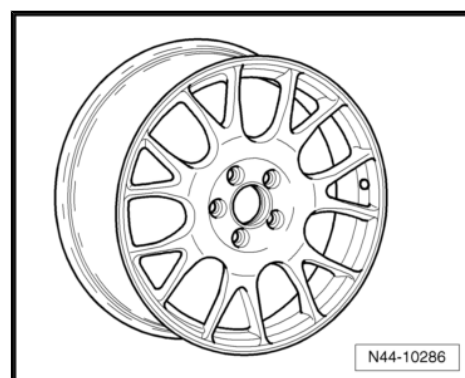


1K0 601 025 BA - Wheel and tyre combination ⇒ [page 238](#)

Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

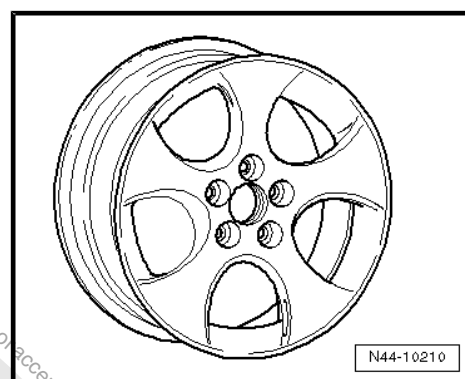

1K0 601 025 BE - Wheel and tyre combination ⇒ [page 238](#)

Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

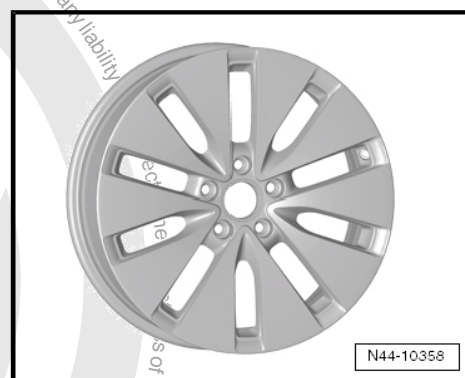


Protected by copyright. Copying for private or commercial purposes, in part or in full, is not permitted unless authorised by Volkswagen AG. Volkswagen AG does not guarantee accuracy or liability for information in this document. Copyright by Volkswagen AG.





1K0 601 025 BL - Wheel and tyre combination ⇒ [page 238](#)

Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

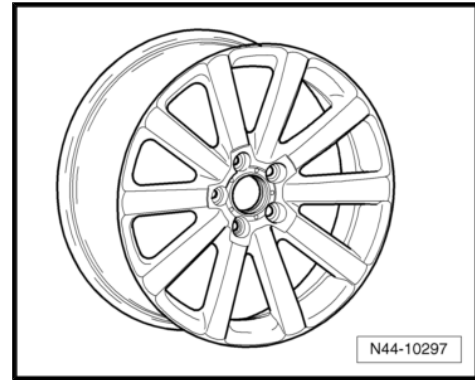




31 Golf R32 model year 2006 to model year 2009

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of only genuine Volkswagen spare parts. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.




WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

31.1 Golf R32, type 1K model year 2006 to model year 2009

Attachment to parts certificate 2066/08

The parts certificate can be found on the Volkswagen ServiceNet under Technology; Guides; Wheels and Tyres Guide.

Type Approval No.: e1*2001/116*0242*11 to e1*2001/116*0242*24

Overview

Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
3.2l 184 kW; petrol engine	Standard tyres	225/40 R 18 92Y	7 1/2 J x 18 ⇒ page 255	51	No	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
	Modification	225/45 R 17 94W	7 J x 17 ⇒ page 253	54	No	Tyre makes recommended by Volkswagen: ◆ Summer tyres ⇒ page 468 ◆ Winter tyres ⇒ page 495
	Winter tyres	205/50 R 17 93Q/T/H	6 J x 17 ⇒ page 252	48.5	Yes* ⇒ page 252	* Only fine-link snow chains, which do not add more than 8 mm may be used ⇒ page 252

Tyre inflation pressures are located on a sticker on inside of fuel tank flap or in ⇒ Maintenance ; Booklet ; Check tyres: condition, profile, inflation pressure, depth of tread .

Approved snow chains for 6 J x 17 offset 48.5 wheel rim

The following snow chains are only permissible in combination with the adjacent wheel and tyre combination!

Chain manufacturer Item no.	Accessory part number	Tyre size	Wheel rim	Part no.
Ottinger 100 956	-	205/50 R 17 93Q/T/H	6 J x 17 offset 48.5	1K0 601 025 N

31.2 Wheel allocation for Golf R32, type 1K model year 2006 to model year 2009

Explanation of information on wheels ⇒ [page 57](#)

Torque settings for wheel bolts ⇒ Running gear, axles, steering; Rep. gr. 44 ; Torque settings for fitting wheels

Pitch circle diameter: 112 mm

Number of wheel bolt holes: 5

31.2.1 6 J x 17



Caution


Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 224](#) .



Winter wheel

1K0 601 025 N - Wheel and tyre combination ⇒ [page 252](#)

Size:	6 J x 17
Wheel offset in mm:	48.5
Wheel load in kg:	615

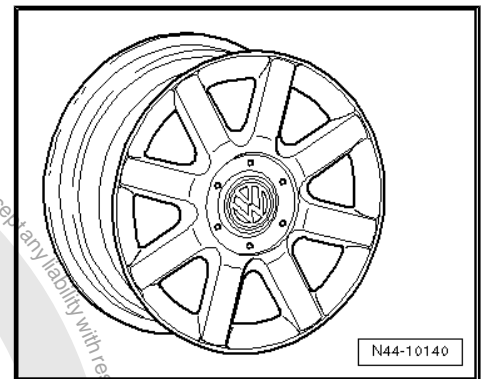


31.2.2 7 J x 17

⚠ Caution
 Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 251](#) .


1K0 601 025 B - Wheel and tyre combination ⇒ [page 252](#)

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

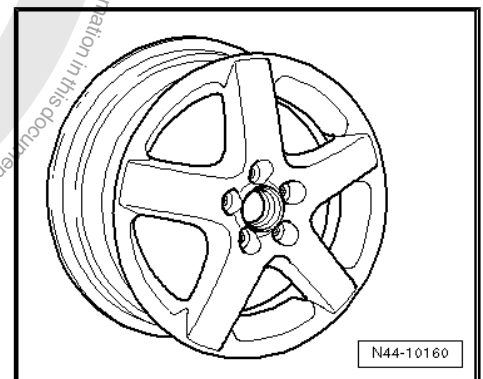

1K0 601 025 C - Wheel and tyre combination ⇒ [page 252](#)


Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

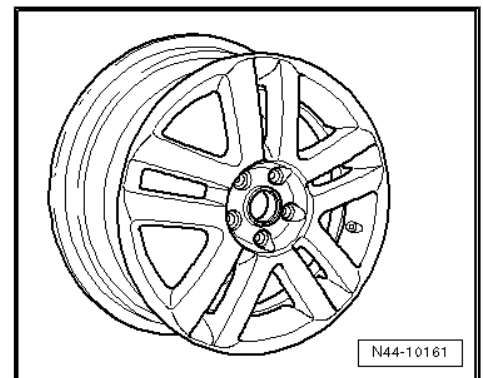




1K0 601 025 J - Wheel and tyre combination ⇒ [page 252](#)

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

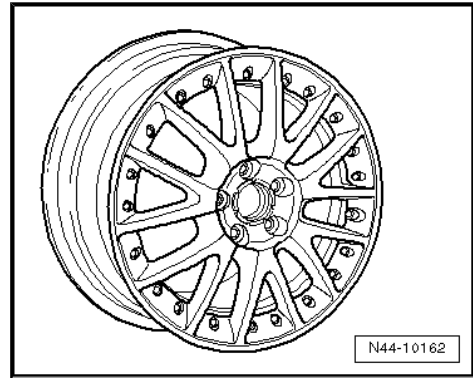


1K0 601 025 K - Wheel and tyre combination ⇒ [page 252](#)

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

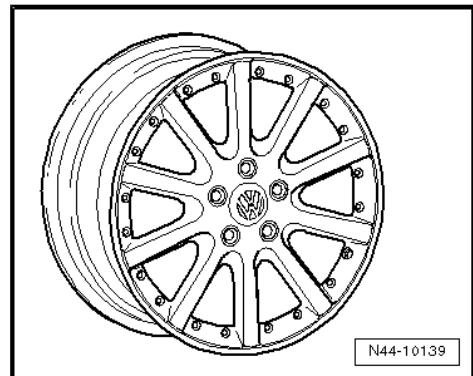


1K0 601 025 M - Wheel and tyre combination ⇒ [page 252](#)

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

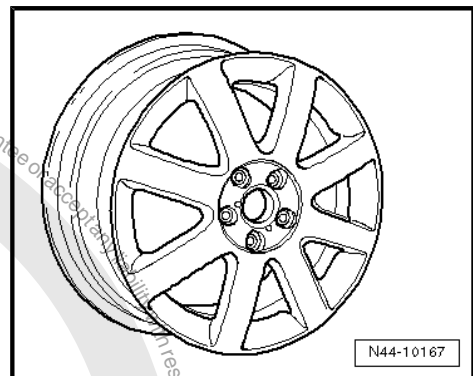

1K0 601 025 T - Wheel and tyre combination ⇒ [page 252](#)


Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

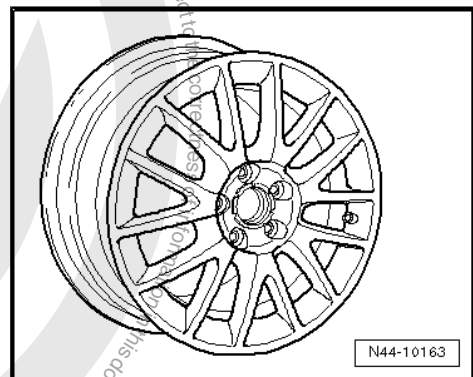




1K0 601 025 AF - Wheel and tyre combination ⇒ page 252

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	630

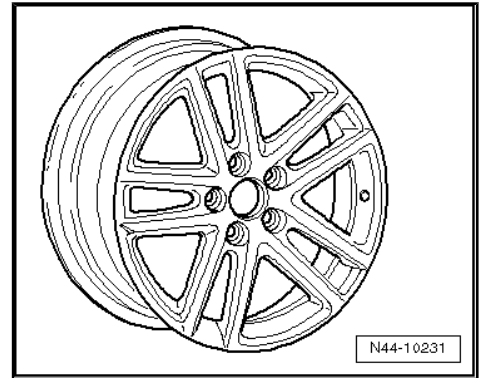


1K0 601 025 AE - Wheel and tyre combination ⇒ page 252

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	630

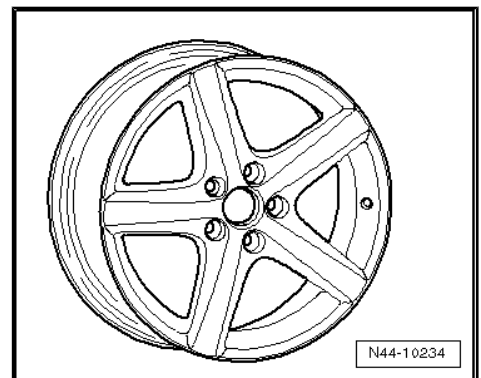

1K0 601 025 AN - Wheel and tyre combination ⇒ page 252

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

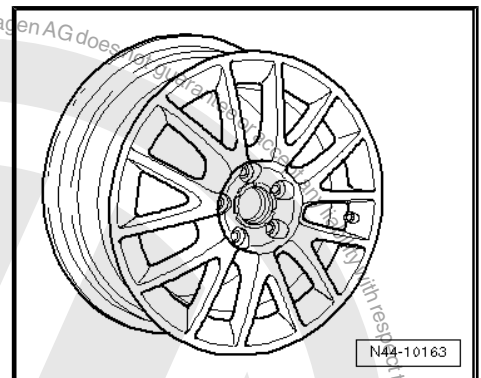

31.2.3 7¹/₂ J x 18




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 251 .

1K0 601 025 AD - Wheel and tyre combination ⇒ page 251


Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	630

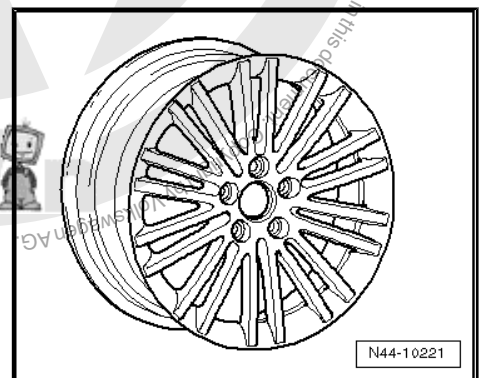




1K0 601 025 AG - Wheel and tyre combination ⇒ [page 251](#)

Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	630

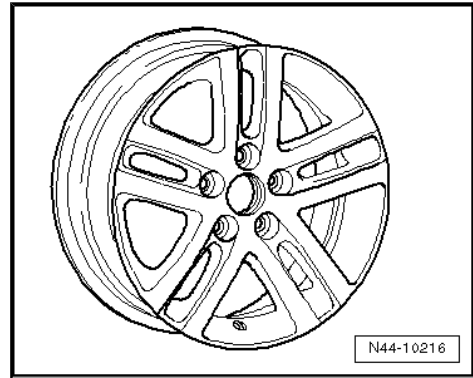


1K0 601 025 AH - Wheel and tyre combination ⇒ [page 251](#)

Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

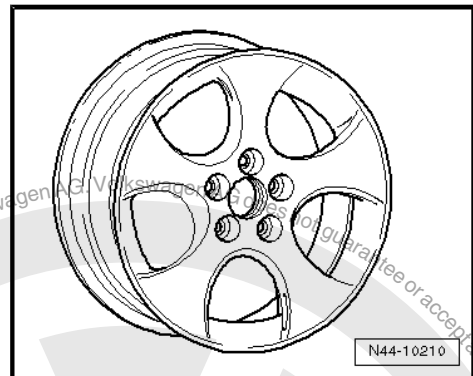


1K0 601 025 AM - Wheel and tyre combination ⇒ [page 251](#)

Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

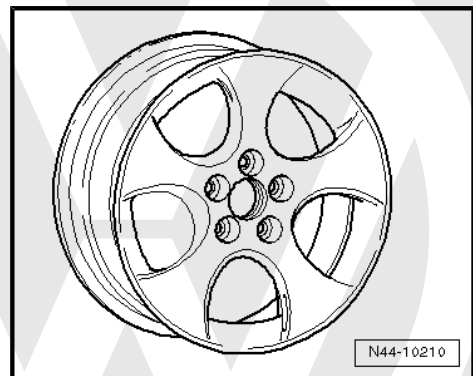

**1K0 601 025 AT, 1K0 601 025 CC - Wheel and tyre combination
⇒ [page 251](#)**


Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

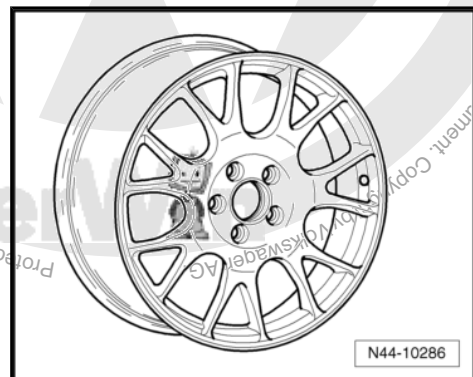




1K0 601 025 BA - Wheel and tyre combination ⇒ page 251

Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

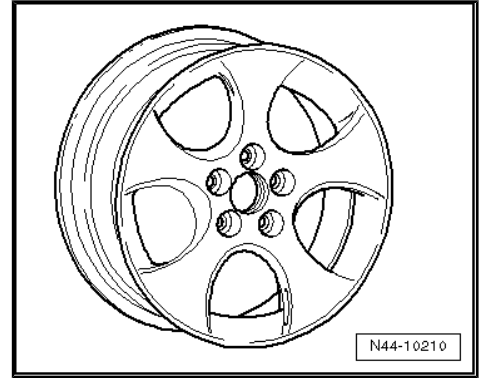


1K0 601 025 BE - Wheel and tyre combination ⇒ page 251

Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

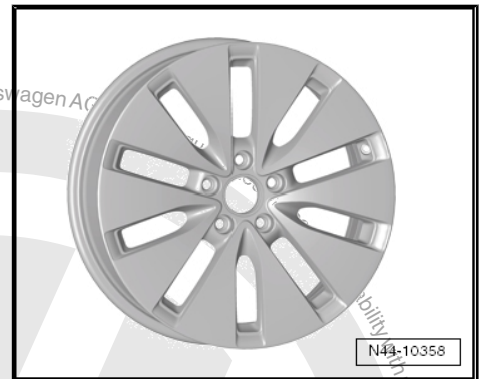

1K0 601 025 BL - Wheel and tyre combination ⇒ page 251

Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

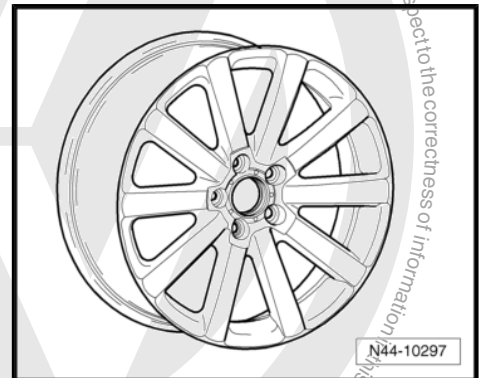



32 CrossGolf from model year 2007

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of only genuine Volkswagen spare parts. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

32.1 CrossGolf, type 1KP model year 2007 to model year 2009

Attachment to parts certificate 2066/08

The parts certificate can be found on the Volkswagen ServiceNet under Technology; Guides; Wheels and Tyres Guide.

Type approval number: e1*2001/116*0304*07 to e1*2001/116*0304*13

Overview

Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
1.9l 77 kW TDI diesel engine	Standard tyres	225/45 R 17 91W	7 J x 17 ⇒ page 268	47	No	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17
	Modification	195/65 R 15 91T/H/V	6 J x 15 ⇒ page 261	47	Yes	Tyre makes recommended by Volkswagen:



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
		195/65 R 15 91T/H/V	6 ¹ / ₂ J x 15 ⇒ page 262	50	Yes	<ul style="list-style-type: none"> ◆ Summer tyres ⇒ page 469 ◆ All-season tyres ⇒ page 483 ◆ Winter tyres ⇒ page 496
		205/60 R 15 91T/H/V	6 J x 15 ⇒ page 261	47	Yes	
		205/55 R 16 91T/H/V	6 ¹ / ₂ J x 16 ⇒ page 264	50	No	
		225/45 R 17 91T/H/V	7 J x 17 ⇒ page 269	54	No	
		225/45 R 17 91W	7 ¹ / ₂ J x 17 ⇒ page 271	47	No	
	Winter tyres	195/65 R 15 91T/H/V	6 J x 15 ⇒ page 261	47	Yes	
		205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 263	50	Yes	
1.6l, 75 kW petrol engine with manual gearbox	Standard tyres	225/45 R 17 91W	7 J x 17 ⇒ page 268	47	No	
	Modification	195/65 R 15 91T/H/V	6 J x 15 ⇒ page 261	47	Yes	
		195/65 R 15 91T/H/V	6 ¹ / ₂ J x 15 ⇒ page 262	50	Yes	
		205/60 R 15 91T/H/V	6 J x 15 ⇒ page 261	47	Yes	
		205/55 R 16 91H/V	6 ¹ / ₂ J x 16 ⇒ page 264	50	No	
		225/45 R 17 91H/V	7 J x 17 ⇒ page 269	54	No	
		225/45 R 17 91W	7 ¹ / ₂ J x 17 ⇒ page 271	47	No	
	Winter tyres	195/65 R 15 91T/H/V	6 J x 15 ⇒ page 261	47	Yes	
		205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 263	50	Yes	
1.6l 75 kW petrol engine with automatic gearbox	Standard tyres	225/45 R 17 91H/V	7 J x 17 ⇒ page 269	54	No	



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
	Modification	195/65 R 15 91T/H/V	6 J x 15 ⇒ page 261	47	Yes	
		195/65 R 15 91T/H/V	6 1/2 J x 15 ⇒ page 262	50	Yes	
		205/60 R 15 91T/H/V	6 J x 15 ⇒ page 261	47	Yes	
		205/55 R 16 91H/V	6 1/2 J x 16 ⇒ page 264	50	No	
	Winter tyres	195/65 R 15 91T/H/V	6 J x 15 ⇒ page 261	47	Yes	
		205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 263	50	Yes	
1.4l 103 kW petrol engine; 2.0l 103 kW TDI; diesel engine	Standard tyres	225/45 R 17 91W	7 J x 17 ⇒ page 268	47	No	
	Modification	195/65 R 15 91H/V	6 J x 15 ⇒ page 261	47	Yes	
		195/65 R 15 91H/V	6 1/2 J x 15	50	Yes	
		205/60 R 15 91H/V	6 J x 15 ⇒ page 261	47	Yes	
		205/55 R 16 91H/V	6 1/2 J x 16 ⇒ page 269	50	No	
		225/45 R 17 91H/V	7 J x 17 ⇒ page 269	54	No	
		225/45 R 17 91W	7 1/2 J x 17 ⇒ page 271	47	No	
	Winter tyres	195/65 R 15 91T/H/V	6 J x 15 ⇒ page 261	47	Yes	
		205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 263	50	Yes	
	1.4l 118 kW petrol engine	Standard tyres	225/45 R 17 91W	7 J x 17 ⇒ page 268	47	No
Modification		205/55 R 16 91V	6 1/2 J x 16 ⇒ page 269	50	No	
		225/45 R 17 91V/W	7 J x 17 ⇒ page 269	54	No	



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
		225/45 R 17 91W	7 ¹ / ₂ J x 17 ⇒ page 271	47	No	
	Winter tyres	205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 263	50	Yes	
		205/50 R 17 93Q/T/H	6 J x 17 ⇒ page 268	48.5	Yes	

Tyre inflation pressures are located on a sticker on inside of fuel tank flap or in ⇒ Maintenance ; Booklet ; Check tyres: condition, profile, inflation pressure, depth of tread .

32.2 Wheel allocation for CrossGolf, type 1KP model year 2007 to model year 2009


Explanation of information on wheels ⇒ [page 57](#)

Torque specifications for wheel bolts ⇒ Running gear, axles, steering; Rep. gr. 44 ; Torque specifications for fitting wheels

Pitch circle diameter: 112 mm

Number of wheel bolt holes: 5

32.2.1 6 J x 15




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 258](#) .

1K0 601 027 C, 1K0 601 027 H - Wheel and tyre combination
⇒ [page 258](#)


Size:	6 J x 15
Wheel offset in mm:	47
Wheel load in kg:	615

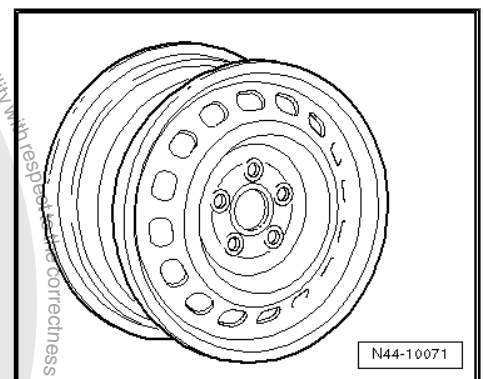




1K0 601 027 T - Wheel and tyre combination ⇒ page 258

Size:	6 J x 15
Wheel offset in mm:	47
Wheel load in kg:	615

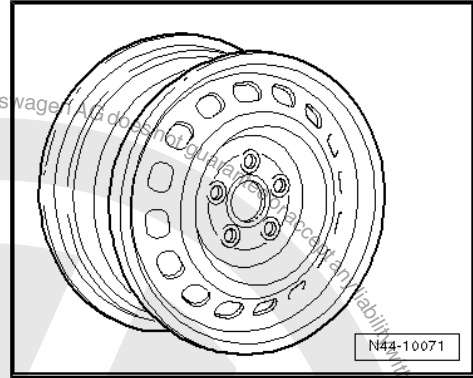

2K0 601 027 - Wheel and tyre combination ⇒ page 258

Size:	6 J x 15
Wheel offset in mm:	47
Wheel load in kg:	650

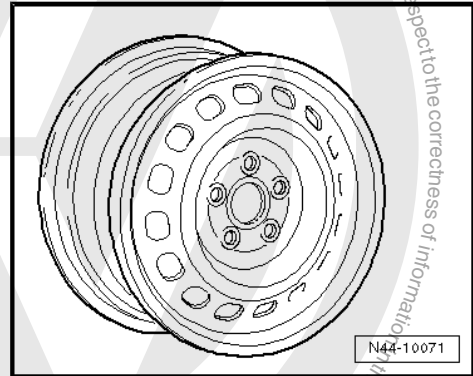

32.2.2 6 1/2 J x 15




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 258.


1K0 601 025 A - Wheel and tyre combination ⇒ page 259

Size:	6 1/2 J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

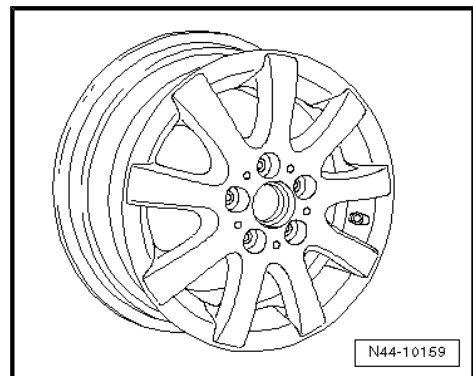

1K0 601 025 AK - Wheel and tyre combination ⇒ page 259


Size:	6 1/2 J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

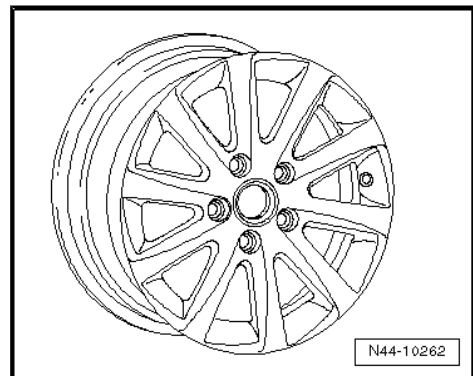




1K0 601 025 AQ - Wheel and tyre combination ⇒ page 259

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

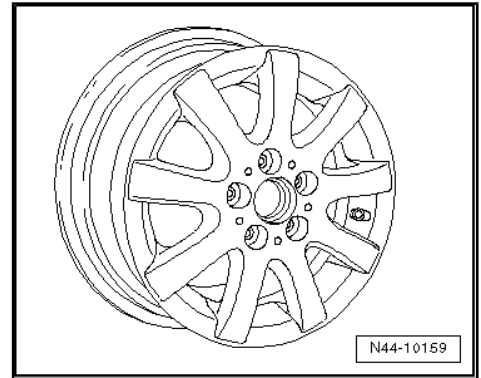

1K0 601 025 CA - Wheel and tyre combination ⇒ page 259

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

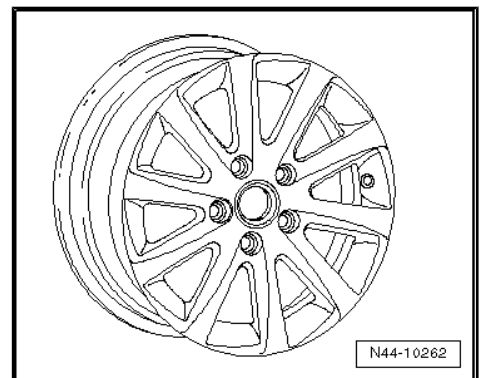

32.2.3 6 J x 16



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 258.


Winter wheels

8P0 601 027 - Wheel and tyre combination ⇒ page 259

Size:	6 J x 16
Wheel offset in mm:	50
Wheel load in kg:	600

Use the following wheel bolt caps for wheel bolts:


- ◆ 1K0.601.173 (4 per wheel)
- ◆ 1K0.601.173.A (1 per wheel)

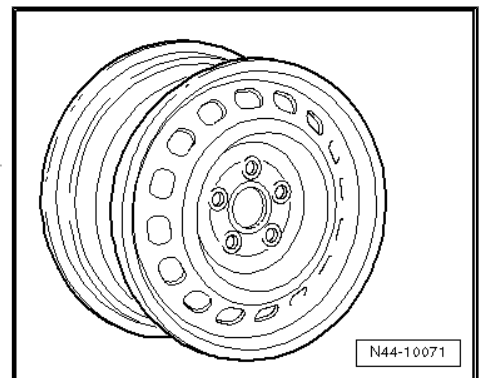



1K0 601 025 Q - Wheel and tyre combination ⇒ page 259

Size:	6 J x 16 EH2 ⇒ page 57
Wheel offset in mm:	50
Wheel load in kg:	615

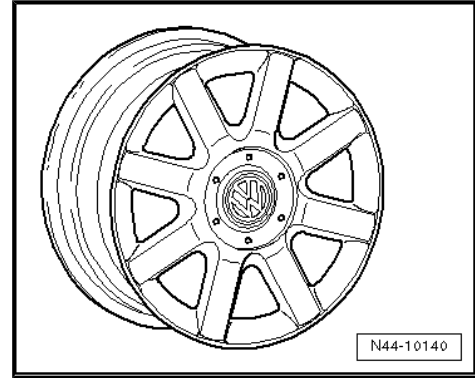

32.2.4 6 1/2 J x 16




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 258 .


1K0 601 027 A - Wheel and tyre combination ⇒ page 259

Size:	6 1/2 J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

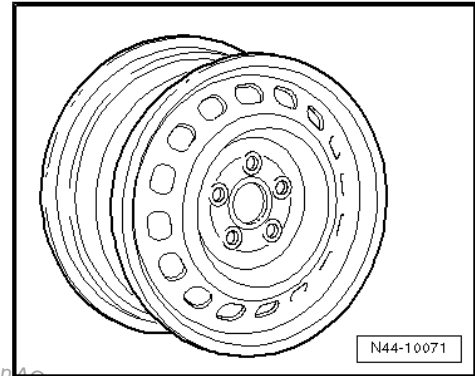


1K0 601 027 J - Wheel and tyre combination ⇒ page 259

Size:	6 1/2 J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

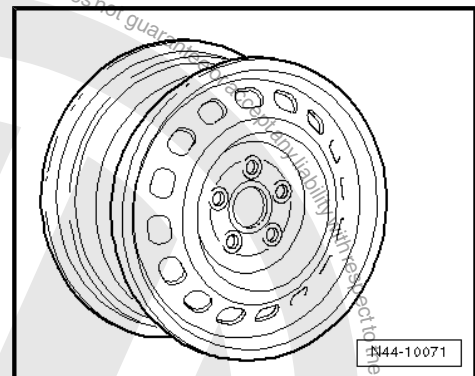

1K0 601 025 AJ - Wheel and tyre combination ⇒ page 259


Size:	6 1/2 J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

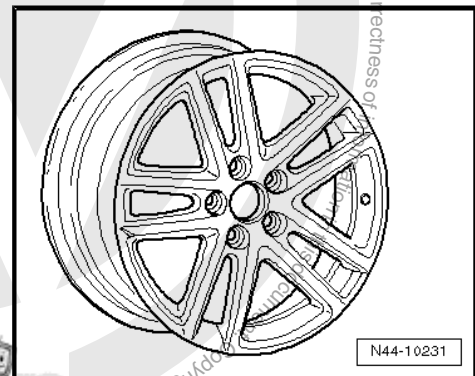




1K0 601 025 BC - Wheel and tyre combination ⇒ [page 259](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

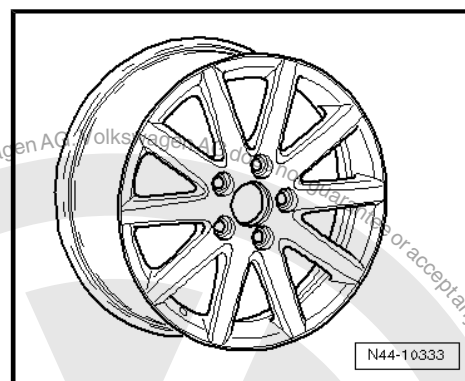

1K0 601 025 BM - Wheel and tyre combination ⇒ [page 259](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

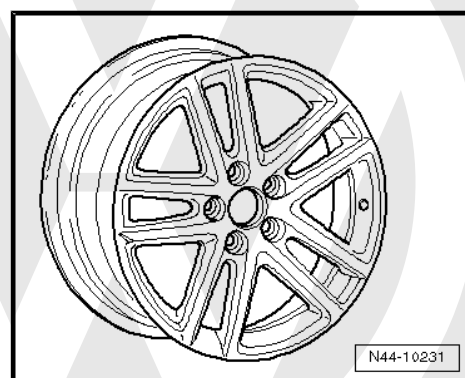

1K0 601 025 BR - Wheel and tyre combination ⇒ [page 259](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615



1K0 601 025 BS - Wheel and tyre combination ⇒ [page 259](#)


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615






1K0 601 025 CB - Wheel and tyre combination ⇒ [page 259](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

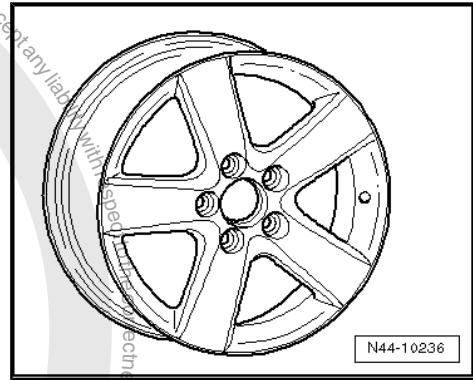


1K0 601 025 CG - Wheel and tyre combination ⇒ [page 259](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

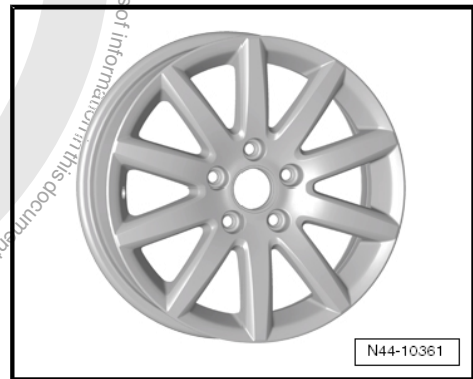


1T0 601 025 C - Wheel and tyre combination ⇒ [page 259](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

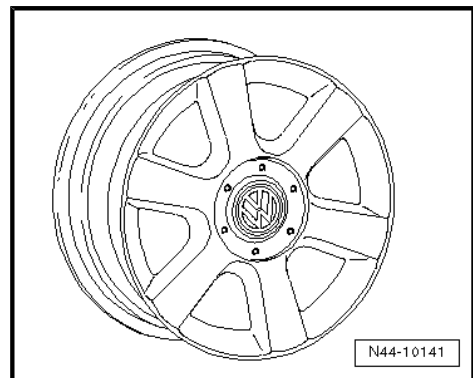

1K0 601 025 F - Wheel and tyre combination ⇒ [page 259](#)


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

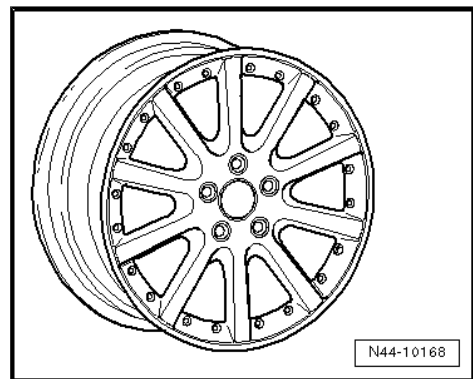




1K0 601 025 P - Wheel and tyre combination ⇒ page 259

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

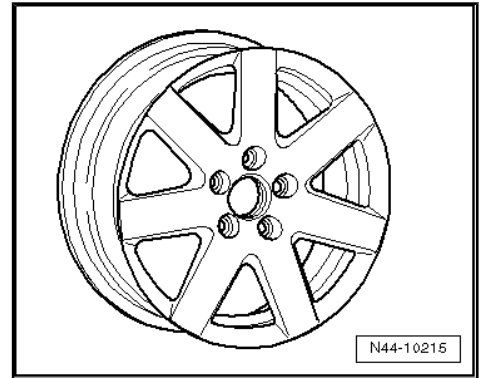


1K0 601 025 R - Wheel and tyre combination ⇒ page 259

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

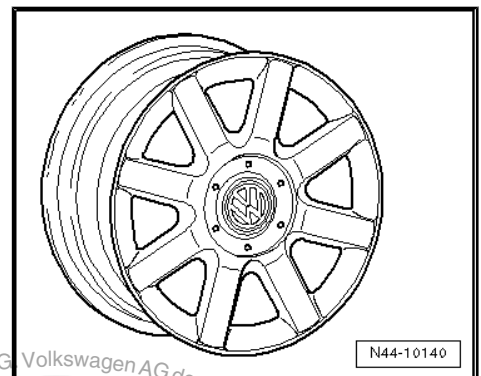


1T0 601 025 G; 1T0 601 025 K - Wheel and tyre combination ⇒ page 259

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

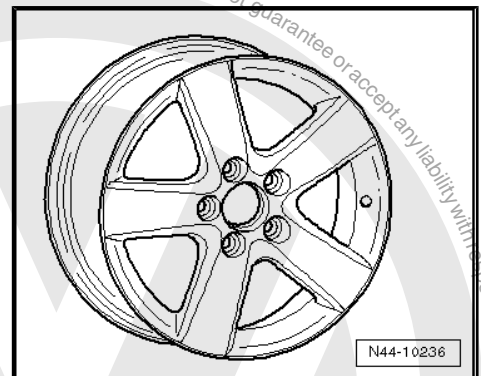

1T0 601 025 M - Wheel and tyre combination ⇒ page 259


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

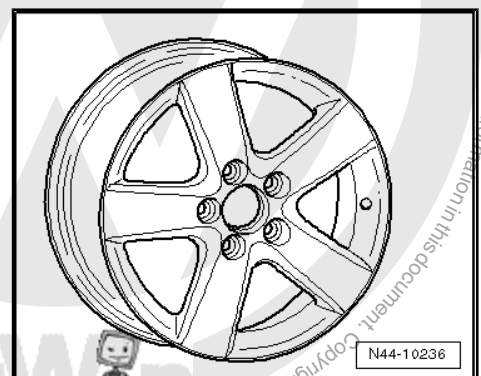



1T0 601 025 R - Wheel and tyre combination ⇒ page 259

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

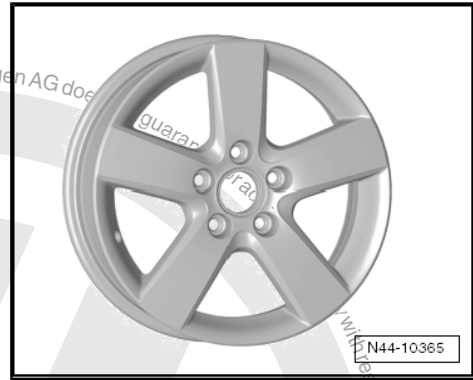

32.2.5 6 J x 17




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 258 .

Winter wheel

1K0 601 025 N - Wheel and tyre combination ⇒ page 261

Size:	6 J x 17
Wheel offset in mm:	48.5
Wheel load in kg:	615

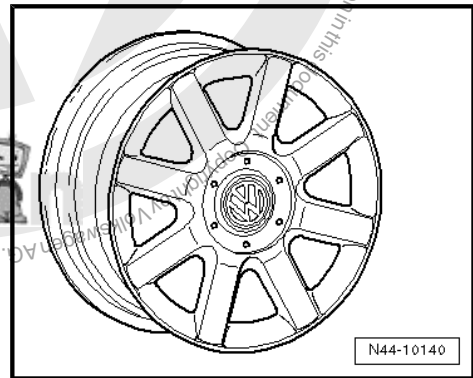

32.2.6 7 J x 17 offset 47




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 258 .

5M0 601 025 - Wheel and tyre combination ⇒ page 258

Size:	7 J x 17
Wheel offset in mm:	47
Wheel load in kg:	630

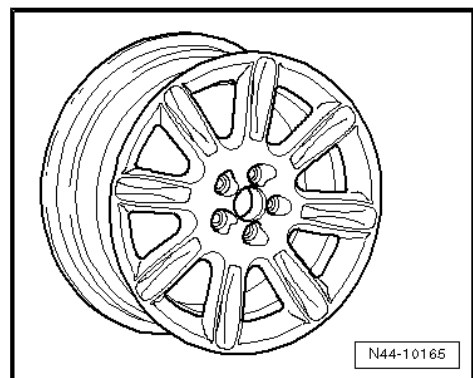




32.2.7 7 J x 17 offset 54

Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 258](#) .


1K0 601 025 B - Wheel and tyre combination ⇒ [page 259](#)

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

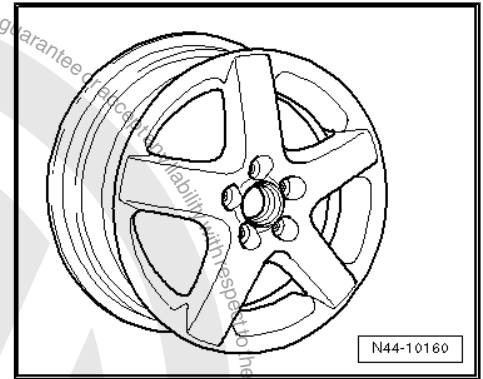


1K0 601 025 C - Wheel and tyre combination ⇒ [page 259](#)

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

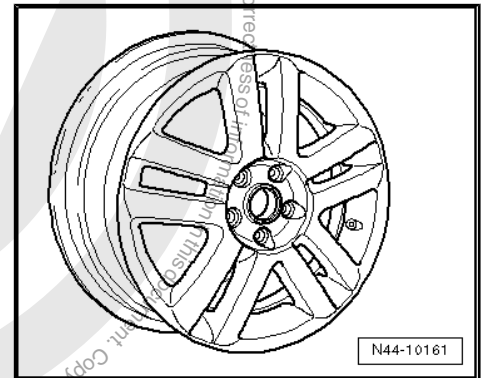


1K0 601 025 J - Wheel and tyre combination ⇒ [page 259](#)

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

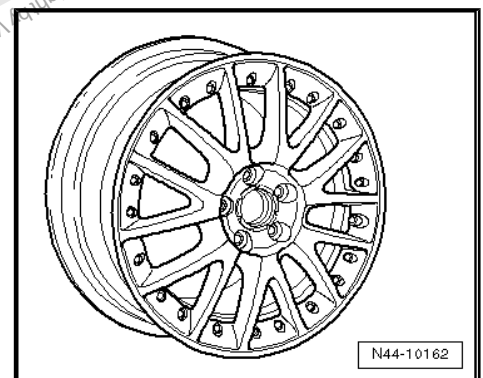

1K0 601 025 K - Wheel and tyre combination ⇒ [page 259](#)


Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

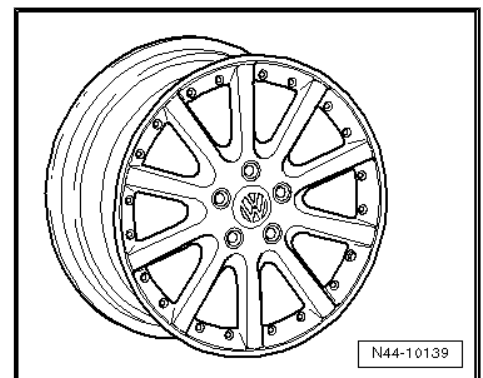




1K0 601 025 M - Wheel and tyre combination ⇒ page 259

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

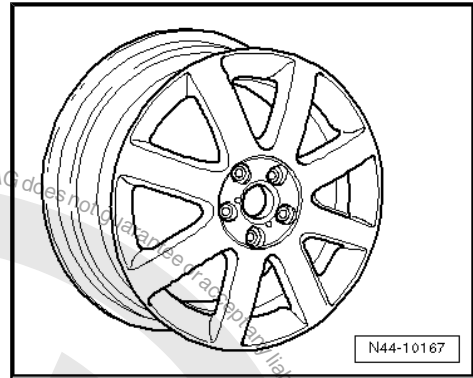


1K0 601 025 T - Wheel and tyre combination ⇒ page 259

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

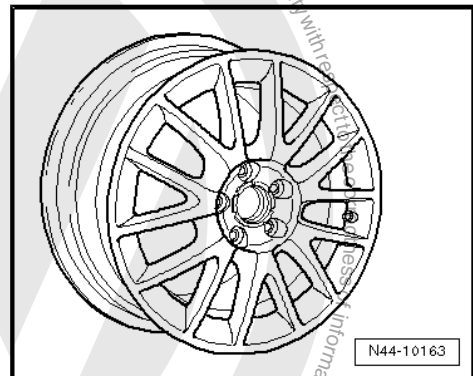


1K0 601 025 AF - Wheel and tyre combination ⇒ page 259

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	630

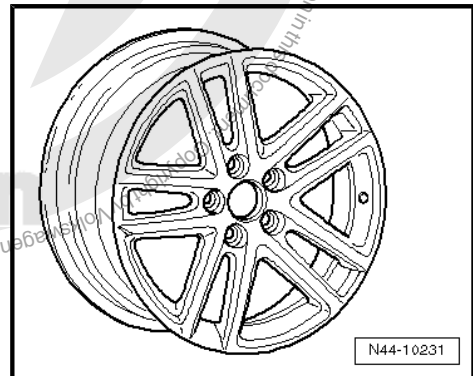

1K0 601 025 AE - Wheel and tyre combination ⇒ page 259


Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	630

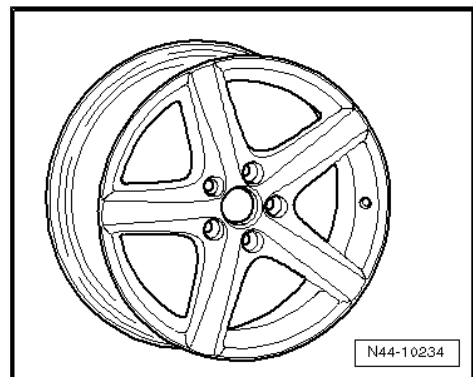



1K0 601 025 AN - Wheel and tyre combination ⇒ page 259

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

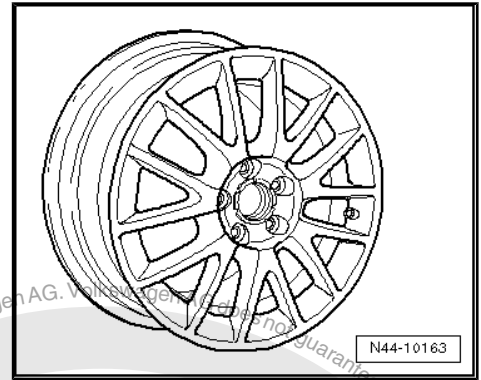

32.2.8 7¹/₂ J x 17




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 258 .

3C0 601 025 R - Wheel and tyre combination ⇒ page 259

Size:	7 ¹ / ₂ J x 17
Wheel offset in mm:	47
Wheel load in kg:	650

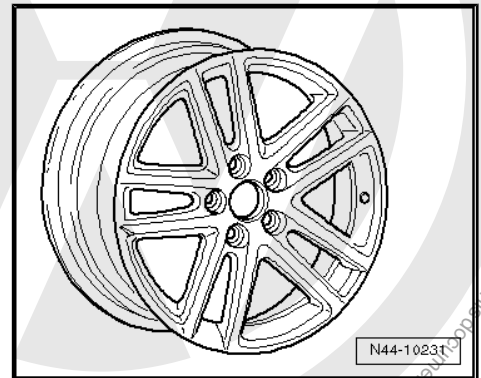



33 Golf Plus from model year 2005

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of only genuine Volkswagen spare parts. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

33.1 Golf Plus, type 1KP model year 2005 to model year 2006

Attachment to parts certificate 2066/08

The parts certificate can be found on the Volkswagen ServiceNet under Technology; Guides; Wheels and Tyres Guide.

Type approval number: e1*2001/116*0304*00 to e1*2001/116*0304*05

Overview

Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
1.4l 55 kW; 1.6l 66 kW petrol engines;	Standard tyres	195/65 R 15 91T	6 J x 15 ⇒ page 278	47	Yes	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17
1.9l 66 kW TDI diesel engine	Modification	195/65 R 15 91H/V	6 J x 15 ⇒ page 278	47	Yes	



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
		195/65 R 15 91T/H/V	6 ¹ / ₂ J x 15 ⇒ page 278	50	Yes	Tyre makes recommended by Volkswagen: ◆ Summer tyres ⇒ page 470 ◆ All-season tyres ⇒ page 484 ◆ Winter tyres ⇒ page 496
		205/60 R 15 91T/H/V	6 J x 15 ⇒ page 278	47	Yes	
		205/55 R 16 91H/V/W	6 ¹ / ₂ J x 16 ⇒ page 280	50	No	
		225/45 R 17 91H/V/W	7 J x 17 ⇒ page 285	54	No	
		225/40 R 18 92Y* ⇒ page 273	7 ¹ / ₂ J x 18 ⇒ page 287	51	No	
		Winter tyres	195/65 R 15 91Q/T/H	6 J x 15 ⇒ page 278	47	
			205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 279	50	Yes
	1.6l 75 kW; 1.6l 85 kW petrol engines; 1.9l 77 kW TDI diesel engine	Standard tyres	195/65 R 15 91H	6 J x 15 ⇒ page 278	47	Yes
Modification		195/65 R 15 91V	6 J x 15 ⇒ page 278	47	Yes	
		195/65 R 15 91H/V	6 ¹ / ₂ J x 15 ⇒ page 278	50	Yes	
		205/60 R 15 91H/V	6 J x 15 ⇒ page 278	47	Yes	
		205/55 R 16 91H/V/W	6 ¹ / ₂ J x 16 ⇒ page 280	50	No	
		225/45 R 17 91H/V/W	7 J x 17 ⇒ page 285	54	No	
		225/40 R 18 92Y* ⇒ page 273	7 ¹ / ₂ J x 18 ⇒ page 287	51	No	
Winter tyres		195/65 R 15 91Q/T/H	6 J x 15 ⇒ page 278	47	Yes	



Model engine output	Tyres	Tyre size	Wheel rim	Offset in mm	Snow chains	Remarks
		205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 279	50	Yes	
2.0l 110 kW; petrol engine	Standard tyres	205/55 R 16 91V	6 ¹ / ₂ J x 16 ⇒ page 280	50	No	
2.0l 96 kW TDI; 2.0l 100 kW TDI; 2.0l 103 kW TDI; diesel engines	Modification	195/65 R 15 91V	6 J x 15 ⇒ page 278	47	Yes	
		195/65 R 15 91V	6 ¹ / ₂ J x 15 ⇒ page 278	50	Yes	
		205/60 R 15 91V	6 J x 15 ⇒ page 278	47	Yes	
		205/55 R 16 91W	6 ¹ / ₂ J x 16 ⇒ page 280	50	No	
		225/45 R 17 91V/W	7 J x 17 ⇒ page 285	54	No	
		225/40 R 18 92Y* ⇒ page 273	7 ¹ / ₂ J x 18 ⇒ page 287	51	No	
	Winter tyres	195/65 R 15 91Q/T/H	6 J x 15 ⇒ page 278	47	Yes	
		205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 279	50	Yes	

Tyre inflation pressures are located on a sticker on inside of fuel tank flap or in ⇒ Maintenance ; Booklet ; Check tyres: condition, profile, inflation pressure, depth of tread .

33.2 Golf Plus, type 1KP model year 2007 to model year 2009

Attachment to parts certificate 2066/08

The parts certificate can be found on the Volkswagen ServiceNet under Technology; Guides; Wheels and Tyres Guide.

Type approval number: e1*2001/116*0304*06 to e1*2001/116*0304*13

Overview

Model engine output	Tyres	Tyre size	Wheel rim	Offset in mm	Snow chains	Remarks
1.9l 66 kW TDI diesel engine (engine codes: BXF and BXJ)	Standard tyres	195/65 R 15 91T	6 J x 15 ⇒ page 278	47	Yes	



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks	
1.6l 85 kW petrol engine with automatic gear-box 1.9l 77 kW TDI diesel engine (engine code: BLS, BXE)	Modification	195/65 R 15 91H/V	6 J x 15 ⇒ page 278	47	Yes	General information on: ♦ Winter tyres ⇒ page 14 ♦ Snow chains ⇒ page 17 Tyre makes recommended by Volkswagen: ♦ Summer tyres ⇒ page 470 ♦ All-season tyres ⇒ page 484 ♦ Winter tyres ⇒ page 496 * The 225/40 R 18 92Y tyre on the 7 ¹ / ₂ J x 18 off-set 51 rim is permitted only on vehicles with sports running gear and rear axle camber of -1°45'!	
		195/65 R 15 91T/H/V	6 ¹ / ₂ J x 15 ⇒ page 278	50	Yes		
		205/60 R 15 91T/H/V	6 J x 15 ⇒ page 278	47	Yes		
		205/55 R 16 91T/H/V	6 ¹ / ₂ J x 16 ⇒ page 280	50	No		
		225/45 R 17 91T/H/V	7 J x 17 ⇒ page 285	54	No		
		225/40 R 18 92Y* ⇒ page 275	7 ¹ / ₂ J x 18 ⇒ page 287	51	No		
	Winter tyres	195/65 R 15 91Q/T/H	6 J x 15 ⇒ page 278	47	Yes		
		205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 279	50	Yes		
	1.4l 55 kW; 1.4l 59 kW; 1.6l 66 kW; 1.6l 75 kW; petrol engines 1.9l 66 kW TDI diesel engine (engine code: BRU)	Standard tyres	195/65 R 15 91T	6 J x 15 ⇒ page 278	47		Yes
		Modification	195/65 R 15 91H/V	6 J x 15 ⇒ page 278	47		Yes
195/65 R 15 91T/H/V			6 ¹ / ₂ J x 15 ⇒ page 278	50	Yes		
205/60 R 15 91T/H/V			6 J x 15 ⇒ page 278	47	Yes		
205/55 R 16 91H/V/W			6 ¹ / ₂ J x 16 ⇒ page 280	50	No		



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
		225/45 R 17 91H/V/W	7 J x 17 ⇒ page 285	54	No	
		225/40 R 18 92Y* ⇒ page 275	7 ¹ / ₂ J x 18 ⇒ page 287	51	No	
	Winter tyres	195/65 R 15 91Q/T/H	6 J x 15 ⇒ page 278	47	Yes	
	205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 279	50	Yes		
1.6l, 85 kW petrol engine with manual gearbox 1.4l 90 kW 1.4l 103 kW petrol engine 1.9l 77 kW TDI diesel engine (engine code: BKC)	Standard tyres	195/65 R 15 91H	6 J x 15 ⇒ page 278	47	Yes	
	Modification	195/65 R 15 91V	6 J x 15 ⇒ page 278	47	Yes	
		195/65 R 15 91H/V	6 ¹ / ₂ J x 15 ⇒ page 278	50	Yes	
		205/60 R 15 91H/V	6 J x 15 ⇒ page 278	47	Yes	
		205/55 R 16 91H/V/W	6 ¹ / ₂ J x 16 ⇒ page 280	50	No	
		225/45 R 17 91H/V/W	7 J x 17 ⇒ page 285	54	No	
		225/40 R 18 92Y* ⇒ page 275	7 ¹ / ₂ J x 18 ⇒ page 287	51	No	
	Winter tyres	195/65 R 15 91Q/T/H	6 J x 15 ⇒ page 278	47	Yes	
		205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 279	50	Yes	
	2.0l 110 kW; petrol engine 2.0l 96 kW TDI; 2.0l 100 kW TDI; 2.0l 103 kW TDI; diesel engines	Standard tyres	205/55 R 16 91H	6 ¹ / ₂ J x 16 ⇒ page 280	50	
Modification		195/65 R 15 91H/V	6 J x 15 ⇒ page 278	47	Yes	
		195/65 R 15 91H/V	6 ¹ / ₂ J x 15 ⇒ page 278	50	Yes	
		205/60 R 15 91H/V	6 J x 15 ⇒ page 278	47	Yes	
		205/55 R 16 91V/W	6 ¹ / ₂ J x 16 ⇒ page 280	50	No	



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
		225/45 R 17 91H/V/W	7 J x 17 ⇒ page 285	54	No	
		225/40 R 18 92Y* ⇒ page 275	7 1/2 J x 18 ⇒ page 287	51	No	
	Winter tyres	195/65 R 15 91Q/T/H	6 J x 15 ⇒ page 278	47	Yes	
		205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 279	50	Yes	
1.4l 118 kW; 1.4l 125 kW; petrol engine	Standard tyres	205/55 R 16 91V	6 1/2 J x 16 ⇒ page 280	50	No	
	Modification	205/55 R 16 91W	6 1/2 J x 16 ⇒ page 280	50	No	
		225/45 R 17 91V/W	7 J x 17 ⇒ page 285	54	No	
		225/40 R 18 92Y* ⇒ page 275	7 1/2 J x 18 ⇒ page 287	51	No	
	Winter tyres	205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 279	50	Yes	
		205/50 R 17 93Q/T/H	6 J x 17 ⇒ page 284	48.5	Yes** ⇒ page 277	

Tyre inflation pressures are located on a sticker on inside of fuel tank flap or in ⇒ Maintenance ; Booklet ; Check tyres: condition, profile, inflation pressure, depth of tread .

Approved snow chains for 6 J x 17 offset 48.5 wheel rim

The following snow chains are only permissible in combination with the adjacent wheel and tyre combination!

Chain manufacturer Item no.	Accessory part number	Tyre size	Wheel rim	Part no.
Ottinger 100 956	-	205/50 R 17 93Q/T/H	6 J x 17 offset 48.5	1K0 601 025 N

33.3 Wheel allocation for Golf Plus, type 1KP model year 2005 to model year 2009

Explanation of information on wheels ⇒ [page 57](#)

Torque specifications for wheel bolts ⇒ Running gear, axles, steering; Rep. gr. 44 ; Torque specifications for fitting wheels

Pitch circle diameter: 112 mm



Number of wheel bolt holes: 5

33.3.1 6 J x 15




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table => [page 272](#) .


1K0 601 027 C, 1K0 601 027 H - Wheel and tyre combination => [page 272](#)

Size:	6 J x 15
Wheel offset in mm:	47
Wheel load in kg:	615

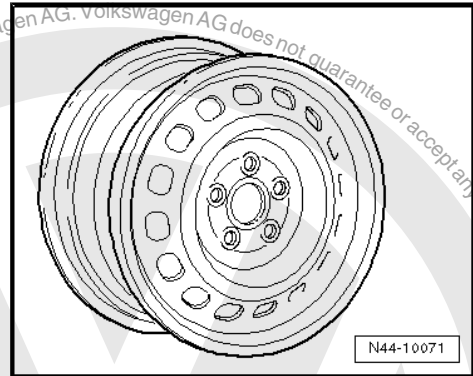


1K0 601 027 T - Wheel and tyre combination => [page 272](#)

Size:	6 J x 15
Wheel offset in mm:	47
Wheel load in kg:	615

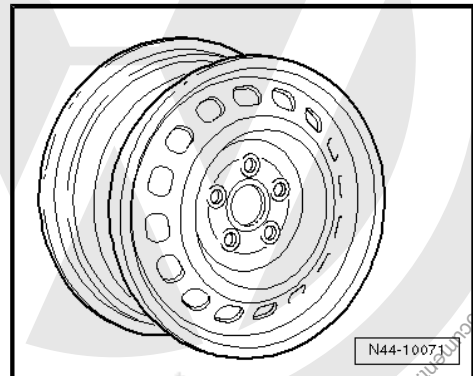

2K0 601 027 - Wheel and tyre combination => [page 272](#)

Size:	6 J x 15
Wheel offset in mm:	47
Wheel load in kg:	650

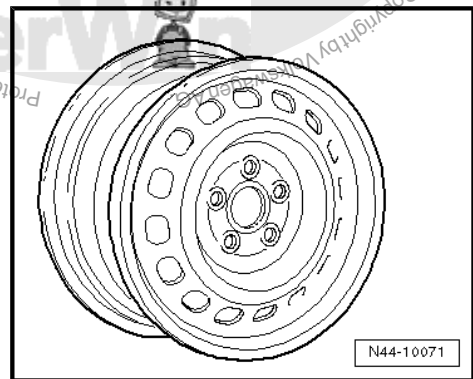

33.3.2 6 1/2 J x 15




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table => [page 272](#) .




1K0 601 025 A - Wheel and tyre combination ⇒ page 273

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

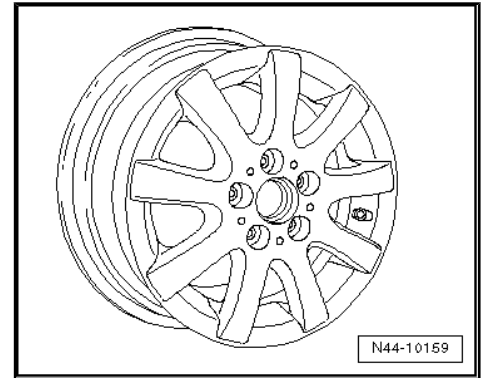


1K0 601 025 AK - Wheel and tyre combination ⇒ page 273

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

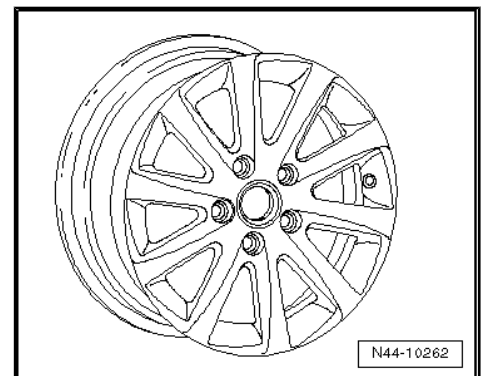


1K0 601 025 AQ - Wheel and tyre combination ⇒ page 273

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

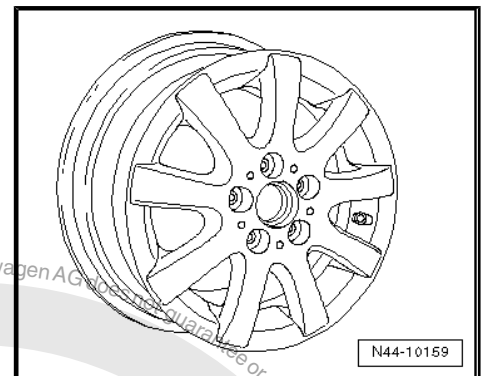

1K0 601 025 CA - Wheel and tyre combination ⇒ page 273

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

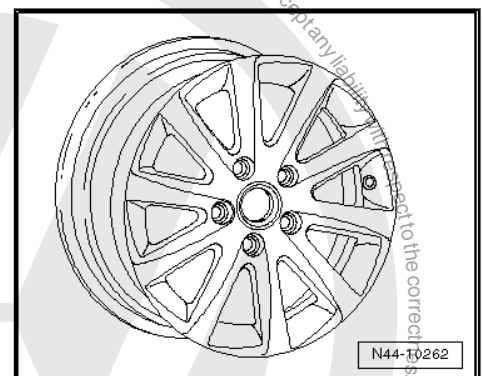

33.3.3 6 J x 16



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 272 .






Winter wheels

8P0 601 027 - Wheel and tyre combination ⇒ [page 273](#)

Size:	6 J x 16
Wheel offset in mm:	50
Wheel load in kg:	600


Use the following wheel bolt caps for wheel bolts:

- ◆ 1K0.601.173 (4 per wheel)
- ◆ 1K0.601.173.A (1 per wheel)

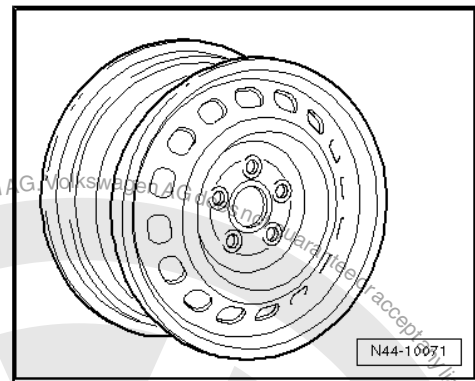

1K0 601 025 Q - Wheel and tyre combination ⇒ [page 273](#)

Size:	6 J x 16 EH2 ⇒ page 57
Wheel offset in mm:	50
Wheel load in kg:	615

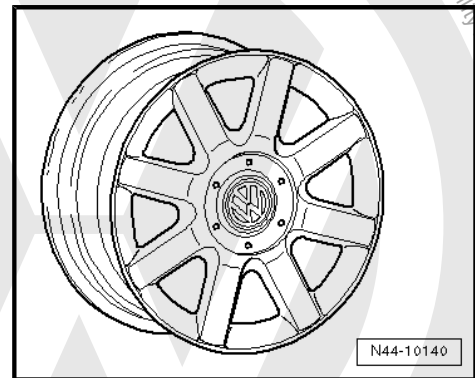

33.3.4 6¹/₂ J x 16




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 272](#).

1K0 601 027 A - Wheel and tyre combination ⇒ [page 273](#)


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

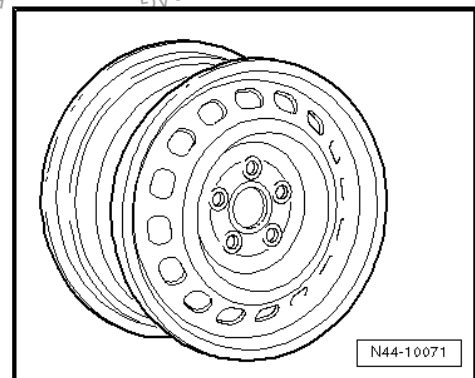




1K0 601 027 J - Wheel and tyre combination ⇒ page 273

Size:	6 1/2 J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

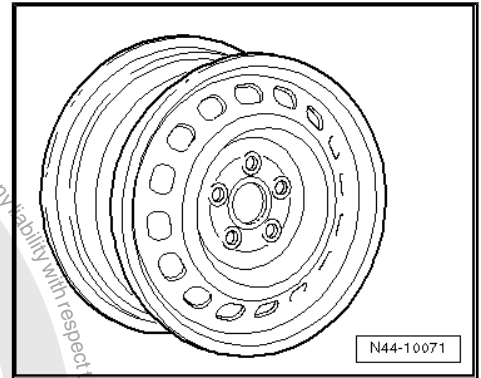


1K0 601 025 AJ - Wheel and tyre combination ⇒ page 273

Size:	6 1/2 J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

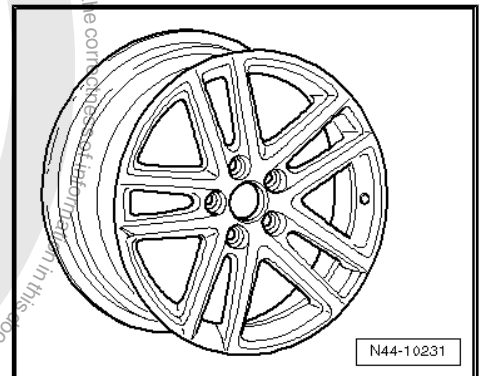


1K0 601 025 BC - Wheel and tyre combination ⇒ page 273

Size:	6 1/2 J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

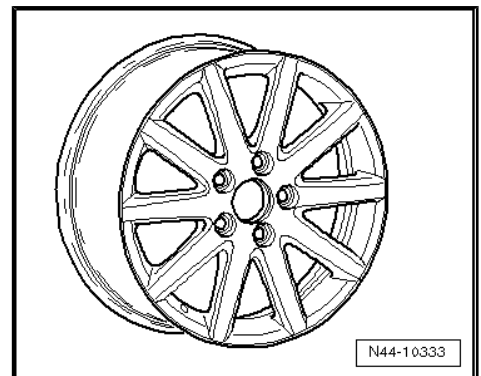

1K0 601 025 BM - Wheel and tyre combination ⇒ page 273

Size:	6 1/2 J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

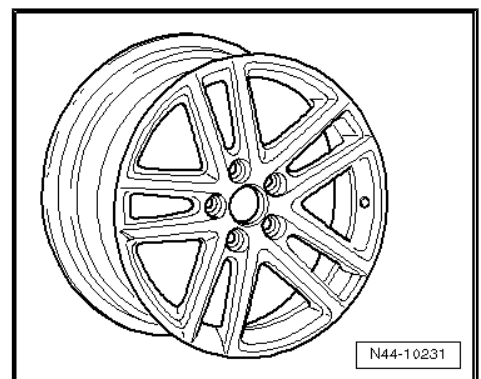



1K0 601 025 BR - Wheel and tyre combination ⇒ page 273

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615




1K0 601 025 BS - Wheel and tyre combination ⇒ page 273

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615




1K0 601 025 CB - Wheel and tyre combination ⇒ page 273

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

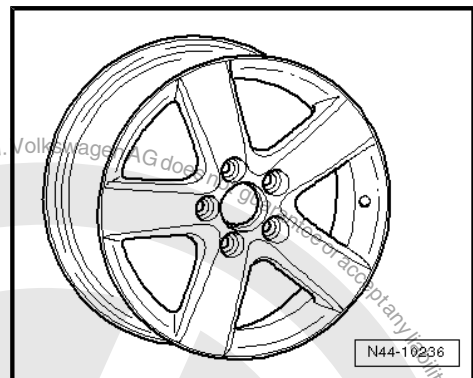

1K0 601 025 CG - Wheel and tyre combination ⇒ page 273


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

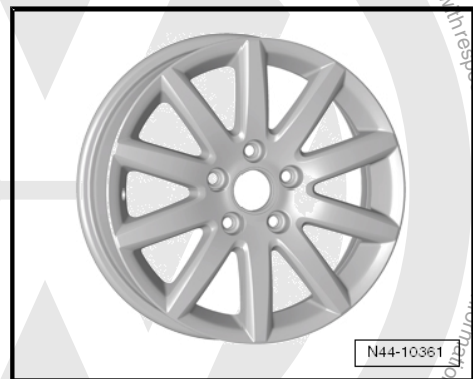




1T0 601 025 C - Wheel and tyre combination ⇒ page 273

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

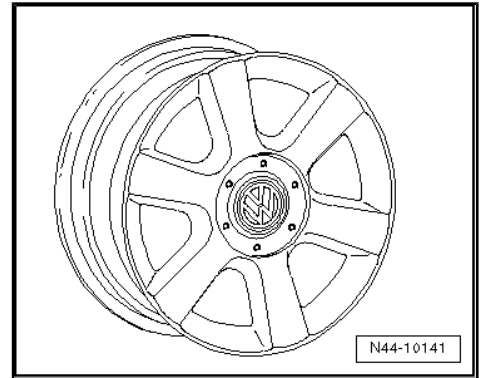


1K0 601 025 F - Wheel and tyre combination ⇒ page 273

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

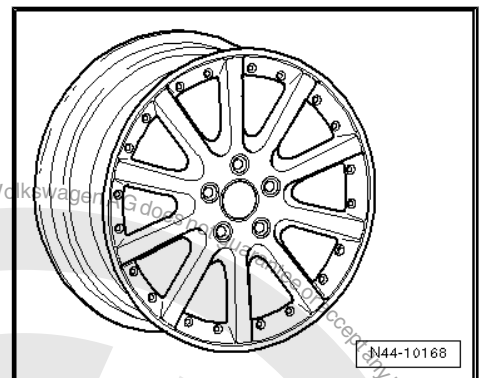


1K0 601 025 P - Wheel and tyre combination ⇒ page 273

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

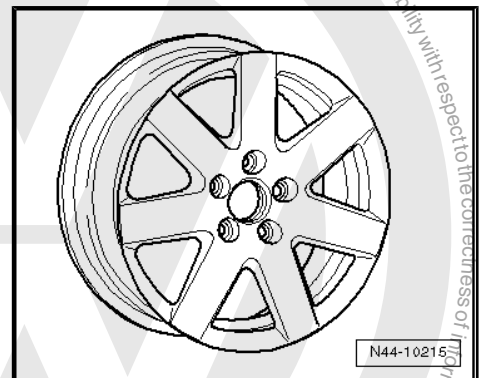

1K0 601 025 R - Wheel and tyre combination ⇒ page 273


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

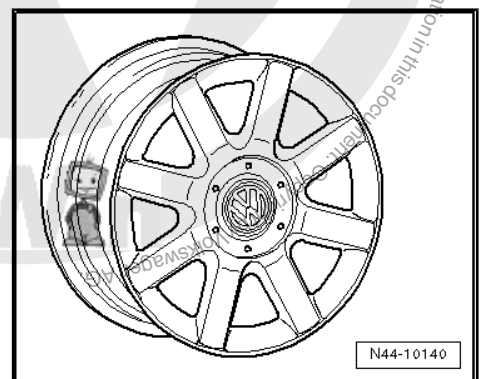




1T0 601 025 G; 1T0 601 025 K - Wheel and tyre combination
⇒ [page 273](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

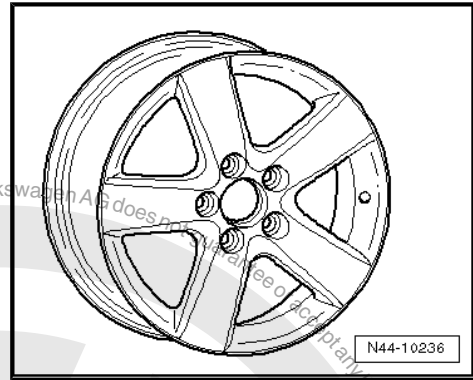


1T0 601 025 M - Wheel and tyre combination ⇒ [page 273](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

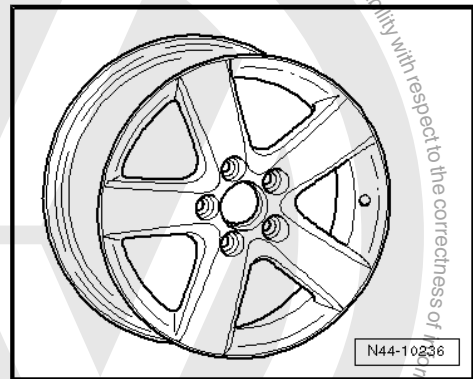

1T0 601 025 R - Wheel and tyre combination ⇒ [page 273](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

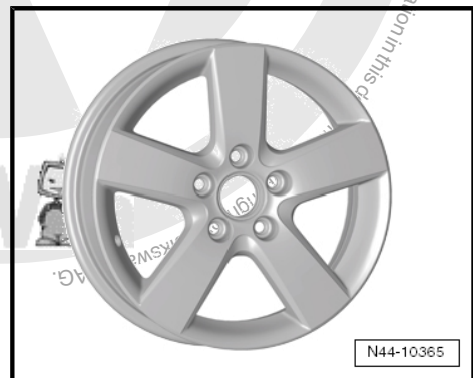

33.3.5 6 J x 17



Caution


Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 274](#) .



Winter wheel

1K0 601 025 N - Wheel and tyre combination ⇒ [page 277](#)

Size:	6 J x 17
Wheel offset in mm:	48.5
Wheel load in kg:	615

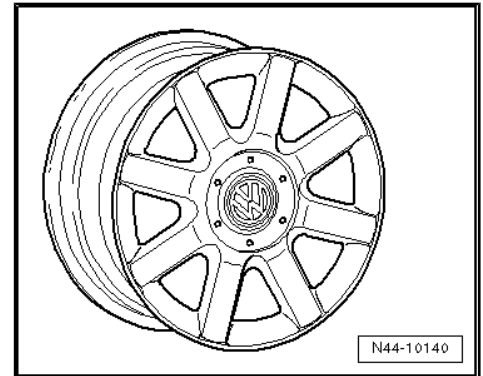

33.3.6 7 J x 17




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 272](#) .


1K0 601 025 B - Wheel and tyre combination ⇒ [page 273](#)

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

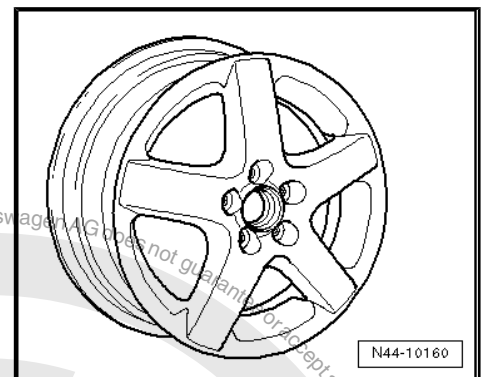

1K0 601 025 C - Wheel and tyre combination ⇒ [page 273](#)

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

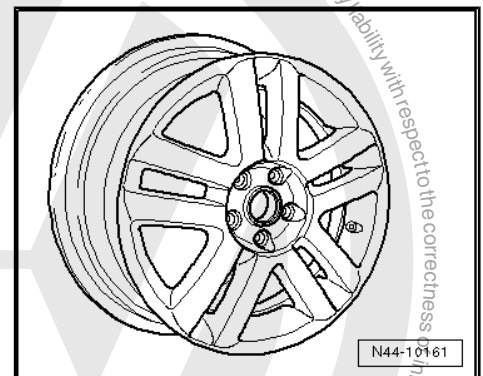


Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by Volkswagen AG. Volkswagen AG does not guarantee or accept any liability with respect to the correctness of the information in this document. Copyright by Volkswagen AG.




1K0 601 025 J - Wheel and tyre combination ⇒ page 273

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

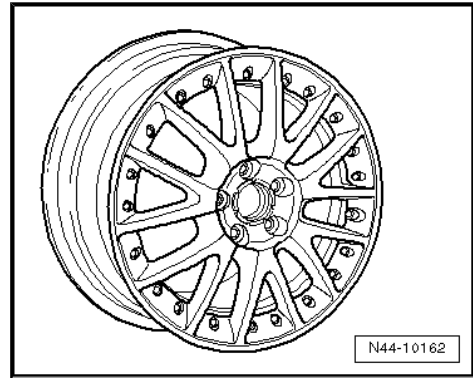


1K0 601 025 K - Wheel and tyre combination ⇒ page 273

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

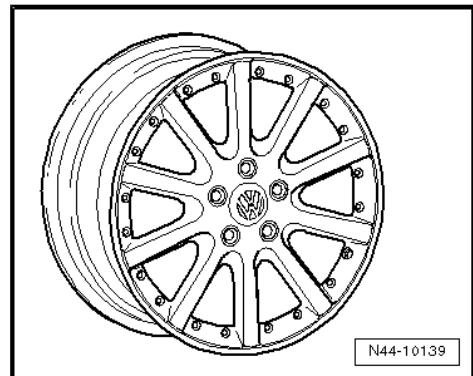


1K0 601 025 M - Wheel and tyre combination ⇒ page 273

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

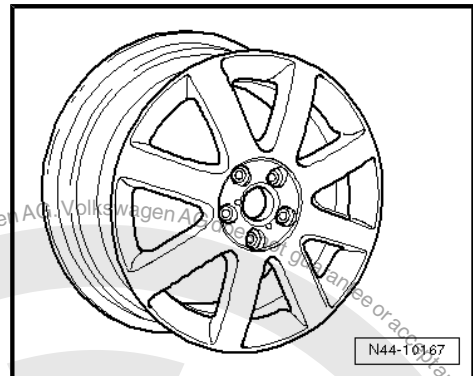

1K0 601 025 T - Wheel and tyre combination ⇒ page 273


Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

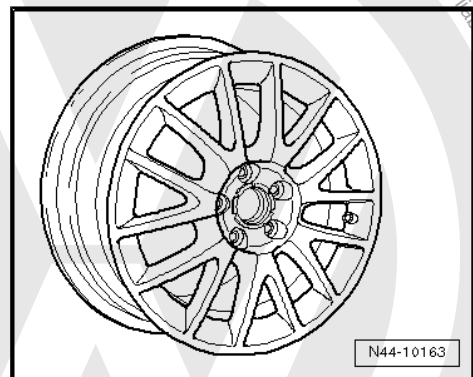




1K0 601 025 AF - Wheel and tyre combination ⇒ page 273

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	630

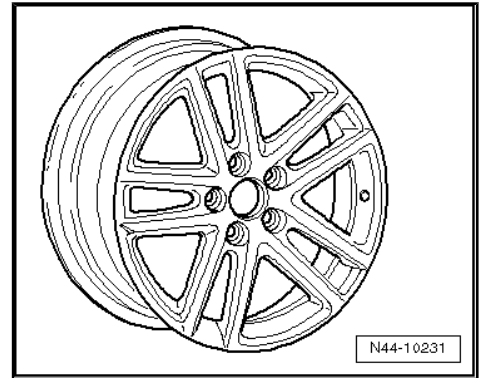


1K0 601 025 AE - Wheel and tyre combination ⇒ page 273

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	630

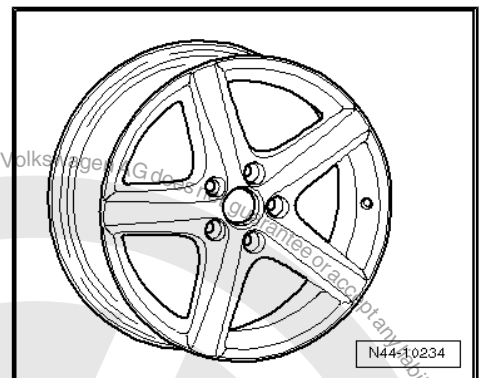

1K0 601 025 AN - Wheel and tyre combination ⇒ page 273

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

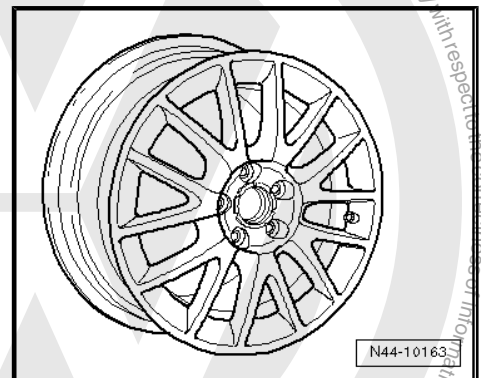

33.3.7 7¹/₂ J x 18




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 272.

1K0 601 025 AD - Wheel and tyre combination ⇒ page 273

Only for vehicles with sports running gear and rear axle camber of -1°45'

Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	630

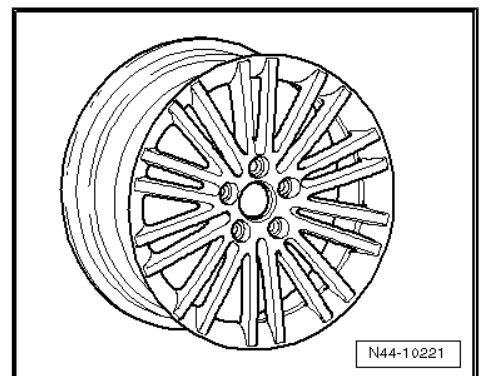




1K0 601 025 AH - Wheel and tyre combination ⇒ [page 273](#)

Only for vehicles with sports running gear and rear axle camber of -1°45'


Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

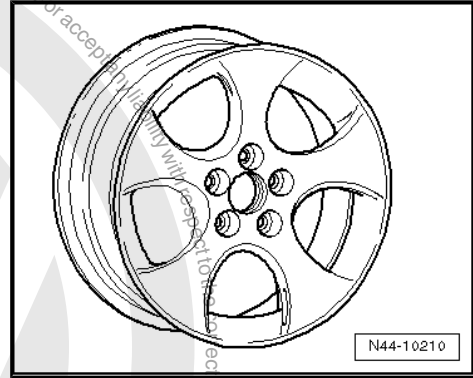

1K0 601 025 AG - Wheel and tyre combination ⇒ [page 273](#)

Only for vehicles with sports running gear and rear axle camber of -1°45'


Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	630

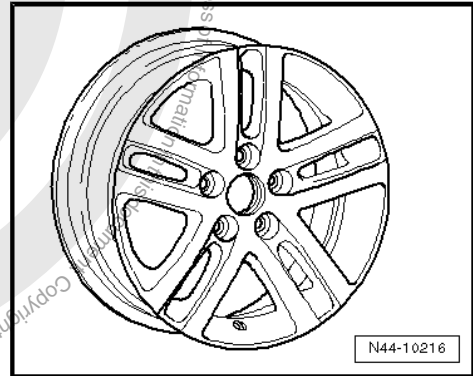

1K0 601 025 AM - Wheel and tyre combination ⇒ [page 273](#)

Only for vehicles with sports running gear and rear axle camber of -1°45'


Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

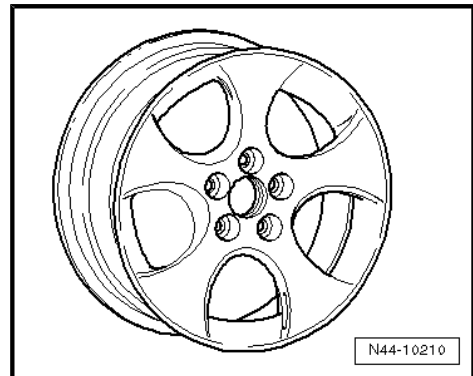

1K0 601 025 BA - Wheel and tyre combination ⇒ [page 273](#)

Only for vehicles with sports running gear and rear axle camber of -1°45'

Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

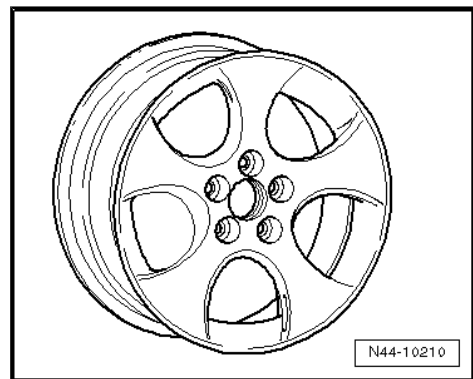




1K0 601 025 BE - Wheel and tyre combination ⇒ [page 273](#)

Only for vehicles with sports running gear and rear axle camber of -1°45'


Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

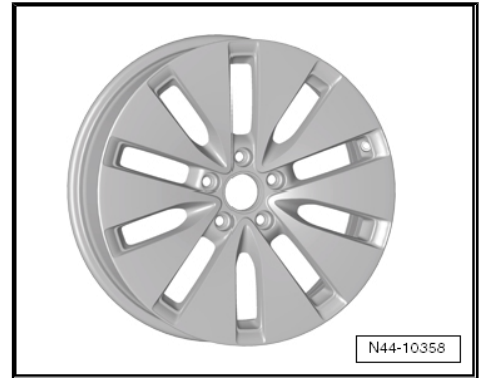

1K0 601 025 BL - Wheel and tyre combination ⇒ [page 273](#)

Only for vehicles with sports running gear and rear axle camber of -1°45'

Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

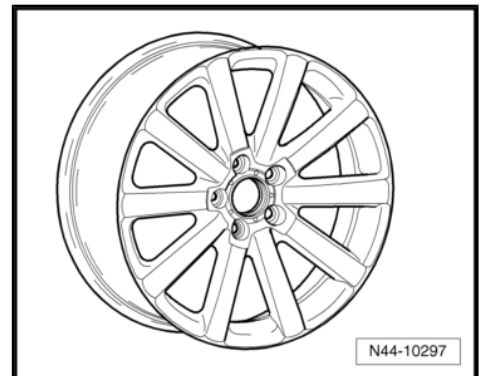



34 Golf Plus BlueMotion from model year 2008

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of only genuine Volkswagen spare parts. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

34.1 Golf Plus BlueMotion, type 1KP model year 2008 to model year 2009

Attachment to parts certificate 2066/08

The parts certificate can be found on the Volkswagen ServiceNet under Technology; Guides; Wheels and Tyres Guide.

Type approval number: e1*2001/116*0304*12 to e1*2001/116*0304*13

Overview

Model engine output	Tyres	Tyre size	Wheel rim	Offset in mm	Snow chains	Remarks
1.9l 77 kW TDI diesel engine	Standard tyres	195/65 R 15 91T	6 J x 15 ⇒ page 291	47	Yes	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
	Modification	195/65 R 15 91H/V	6 J x 15 ⇒ page 291	47	Yes	Tyre makes recommended by Volkswagen: ♦ Summer tyres ⇒ page 471 ♦ Winter tyres ⇒ page 497
		195/65 R 15 91T/H/V	6 1/2 J x 15 ⇒ page 292	50	Yes	
		205/60 R 15 91T/H/V	6 J x 15 ⇒ page 291	47	Yes	
		205/55 R 16 91T/H/V/ W	6 1/2 J x 16 ⇒ page 293	50	No	
	Winter tyres	195/65 R 15 91Q/T/H	6 J x 15 page 291	47	Yes	

Tyre inflation pressures are located on a sticker on inside of fuel tank flap or in ⇒ Maintenance ; Booklet ; Check tyres: condition, profile, inflation pressure, depth of tread .

34.2 Wheel allocation for Golf Plus BlueMotion, type 1KP model year 2008 to model year 2009

Explanation of information on wheels ⇒ [page 57](#)

Torque specifications for wheel bolts ⇒ Running gear, axles, steering; Rep. gr. 44 ; Torque specifications for fitting wheels

Pitch circle diameter: 112 mm

Number of wheel bolt holes: 5


34.2.1 6 J x 15

Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 290](#) .

1K0 601 027 C, 1K0 601 027 H - Wheel and tyre combination
⇒ [page 290](#)


Size:	6 J x 15
Wheel offset in mm:	47
Wheel load in kg:	615

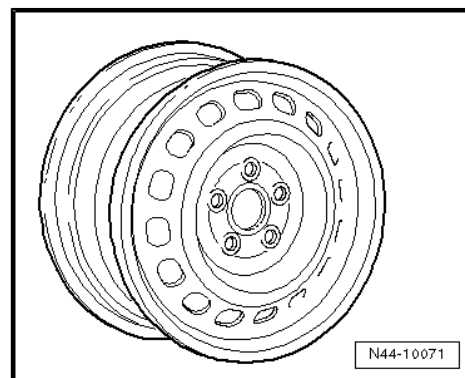




1K0 601 027 T - Wheel and tyre combination ⇒ page 290

Size:	6 J x 15
Wheel offset in mm:	47
Wheel load in kg:	615

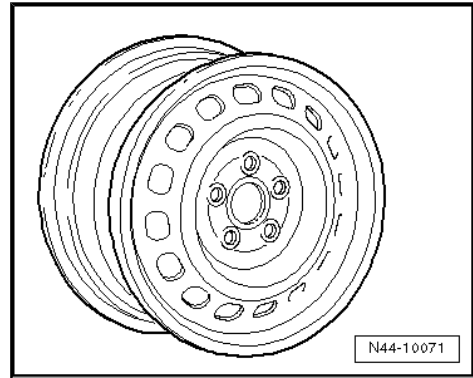

2K0 601 027 - Wheel and tyre combination ⇒ page 290

Size:	6 J x 15
Wheel offset in mm:	47
Wheel load in kg:	650

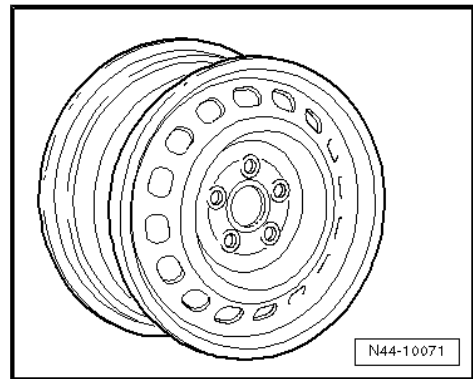

34.2.2 6 1/2 J x 15




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 290 .


1K0 601 025 A - Wheel and tyre combination ⇒ page 291

Size:	6 1/2 J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

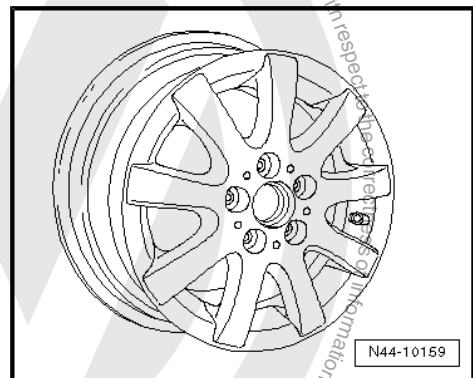

1K0 601 025 AK - Wheel and tyre combination ⇒ page 291


Size:	6 1/2 J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

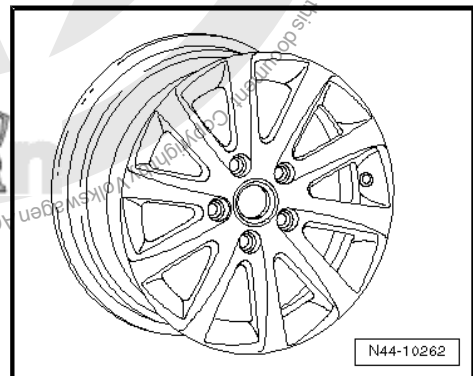




1K0 601 025 AQ - Wheel and tyre combination ⇒ page 291

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

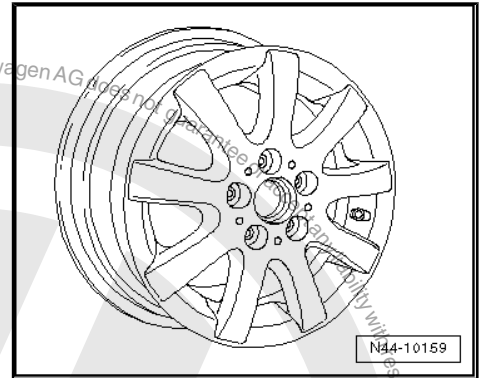

1K0 601 025 CA - Wheel and tyre combination ⇒ page 291

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

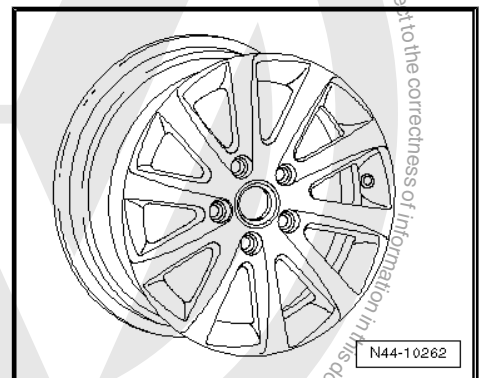

34.2.3 6¹/₂ J x 16




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 290 .


1K0 601 027 A - Wheel and tyre combination ⇒ page 291

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

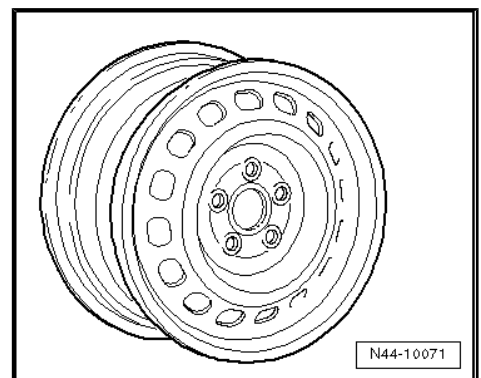

1K0 601 027 J - Wheel and tyre combination ⇒ page 291


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

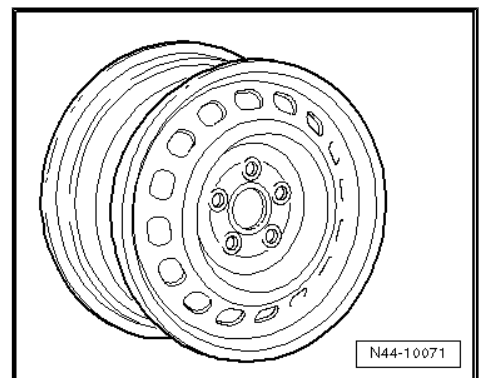




1K0 601 025 AJ - Wheel and tyre combination ⇒ page 291

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

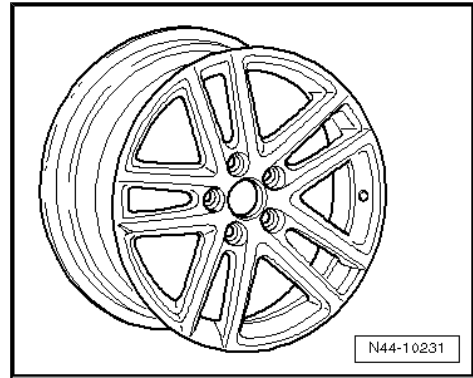


1K0 601 025 BC - Wheel and tyre combination ⇒ page 291

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

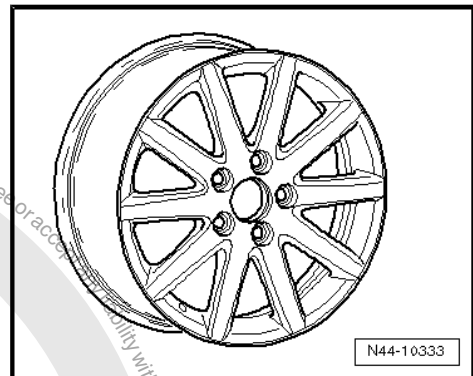

1K0 601 025 BM - Wheel and tyre combination ⇒ page 291

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

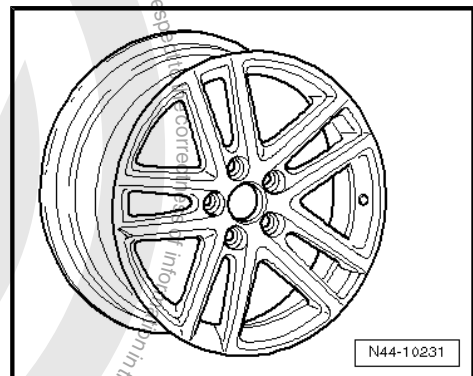

1K0 601 025 BR - Wheel and tyre combination ⇒ page 291


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615






1K0 601 025 BS - Wheel and tyre combination ⇒ [page 291](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

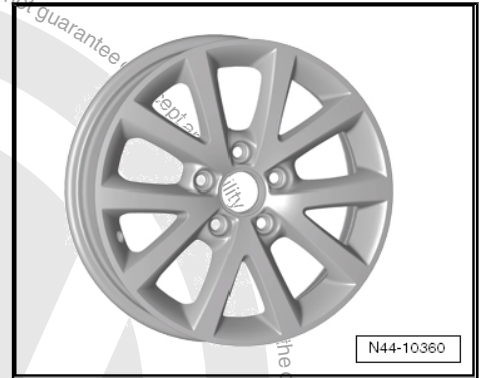


1K0 601 025 CB - Wheel and tyre combination ⇒ [page 291](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

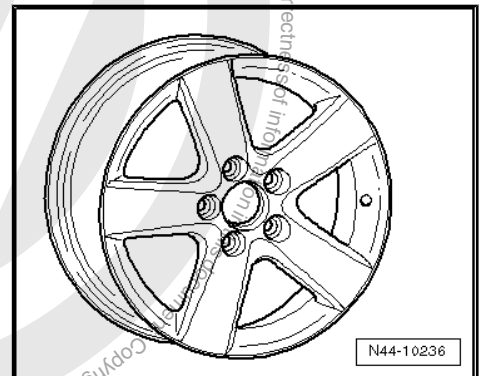


1K0 601 025 CG - Wheel and tyre combination ⇒ [page 291](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

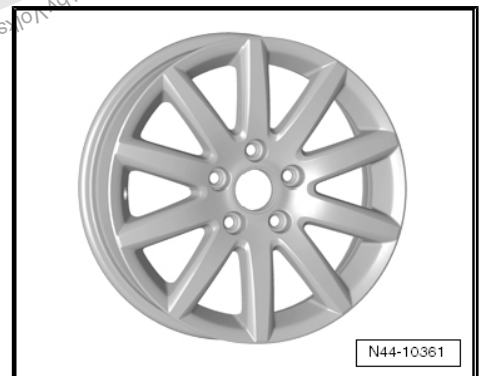

1T0 601 025 C - Wheel and tyre combination ⇒ [page 291](#)


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

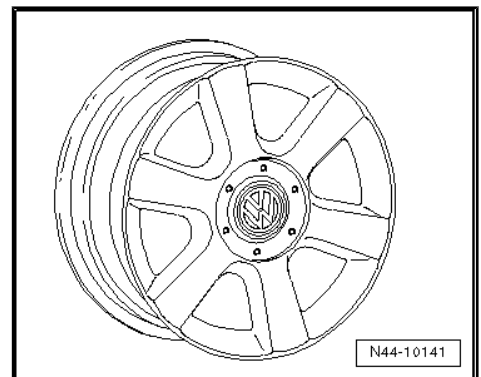




1K0 601 025 F - Wheel and tyre combination ⇒ page 291

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

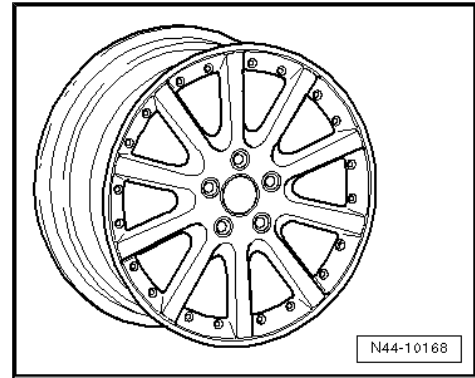


1K0 601 025 P - Wheel and tyre combination ⇒ page 291

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

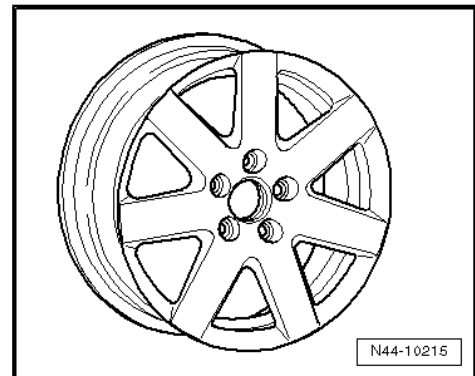


1K0 601 025 R - Wheel and tyre combination ⇒ page 291

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

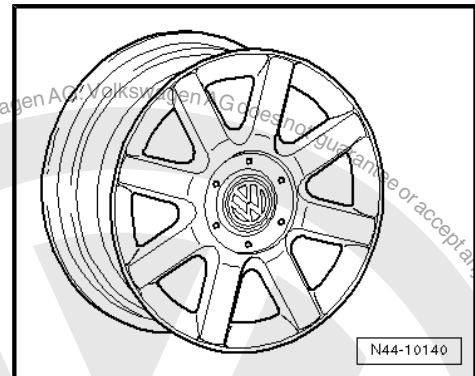

1T0 601 025 G; 1T0 601 025 K - Wheel and tyre combination ⇒ page 291


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

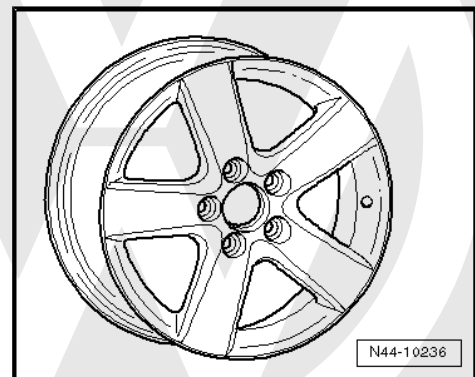




1T0 601 025 M - Wheel and tyre combination ⇒ [page 291](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

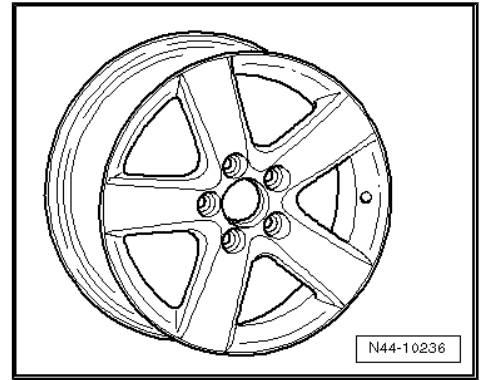

1T0 601 025 R - Wheel and tyre combination ⇒ [page 291](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

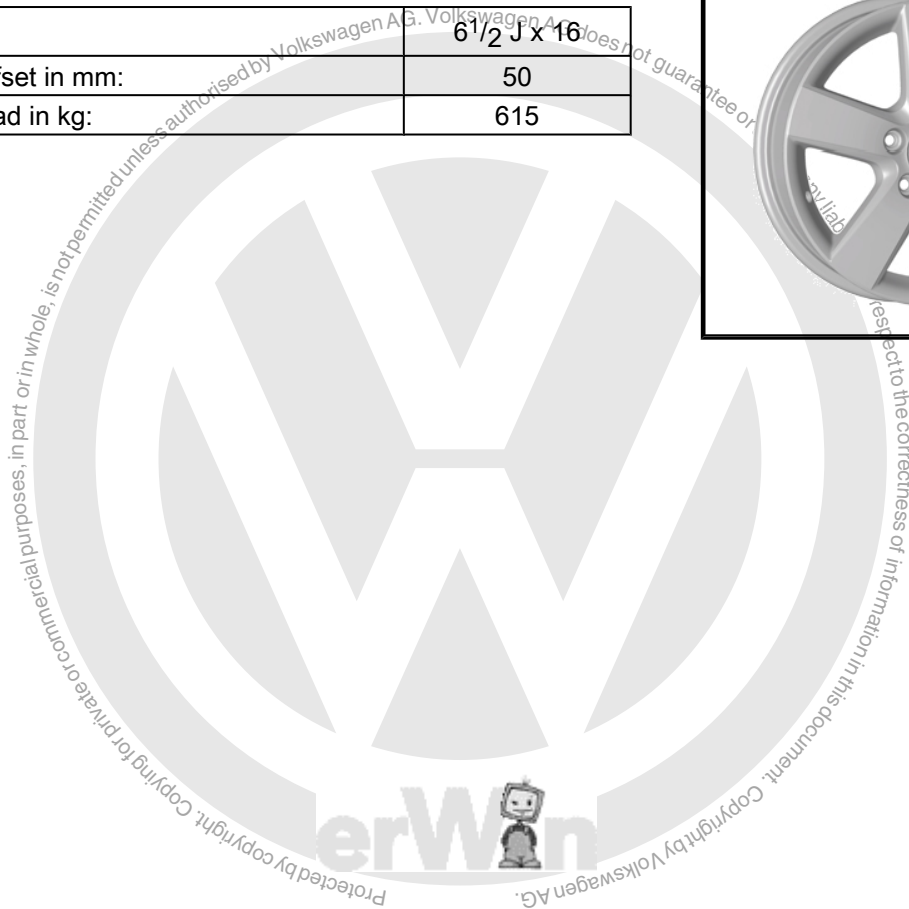



35 Golf estate model year 1994 to model year 1998

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of genuine Volkswagen spare parts only. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to disc-type wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

35.1 Golf Estate type 1HX0, Golf Estate Syncro type 1HX1, Golf Estate type 1H

Appendix 2 to Parts Certificate 1479/00



Golf estate; type 1HX0 from model year 1994 to model year 1997

General type approval No.: F 804

Golf estate Syncro; type 1HX1 from model year 1994 to model year 1997

General type approval No.: G 156

Golf Estate; type 1H model year 1998

Type Approval No. e1*96/79*0068*00 to e1*96/79*0068*03

Overview

Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
40 kW, 44 kW	Standard tyres	175/70 R 13 82T	5 ¹ / ₂ J x 13 ⇒ page 302	38	Yes	The 175/70 R 13 82S/T/Q tyres are no longer permitted on vehicles with ABS from 05.96.
	Modification	175/70 R 13 82S	5 ¹ / ₂ J x 13 ⇒ page 302	38	Yes	
		185/60 R 14 82T	6 J x 14 ⇒ page 302	43/4 5	Yes	
		195/60 R 14 85T* ⇒ page 299	6 J x 14 ⇒ page 302	43/4 5	Yes	*Vehicles from model year 1995 require tyres with LI 86
		195/50 R 15 82H	6 J x 15 ⇒ page 305	45	Yes	
	Winter tyres	175/70 R 13 82Q	5 ¹ / ₂ J x 13 ⇒ page 302	38	Yes	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17
47 kW, 55 kW CL, GL diesel engine; 55 kW CL, GL petrol engine	Standard tyres	185/60 R 14 82H	6 J x 14 ⇒ page 302	43/4 5	Yes	Tyre makes recommended by Volkswagen: ◆ Summer tyres ⇒ page 464 ◆ All-season tyres ⇒ page 482 ◆ Winter tyres ⇒ page 492
	Modification	185/60 R 14 82T	6 J x 14 ⇒ page 302	43/4 5	Yes	
		195/60 R 14 85T* ⇒ page 299	6 J x 14 ⇒ page 302	43/4 5	Yes	
		195/50 R 15 82H	6 J x 15 ⇒ page 305	45	Yes	
	Winter tyres	175/65 R 14 82Q	6 J x 14 ⇒ page 302	43/4 5	Yes	



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
66 kW TDI; 66 kW CL, GT	Standard tyres	195/50 R 15 86H	6 J x 15 ⇒ page 305	43/4 5	Yes	
	Modification	185/60 R 14 82T	6 J x 14 ⇒ page 302	43/4 5	Yes	
		195/60 R 14 85T* ⇒ page 299	6 J x 14 ⇒ page 302	43/4 5	Yes	
		195/50 R 15 82H	6 J x 15 ⇒ page 305	45	Yes	
	Winter tyres	175/65 R 14 82Q	6 J x 14 ⇒ page 302	43/4 5	Yes	
Estate „Special“ 66 kW GT; 55 kW GTD 66 kW TDI	Standard tyres	195/50 R 15 86V	6 J x 15 ⇒ page 305	45	Yes	
	Modification	185/60 R 14 82T	6 J x 14 ⇒ page 302	43/4 5	Yes	
		195/60 R 14 85T* ⇒ page 299	6 J x 14 ⇒ page 302	43/4 5	Yes	
		195/50 R 15 82H	6 J x 15 ⇒ page 305	45	Yes	
	Winter tyres	175/65 R 14 82Q	6 J x 14 ⇒ page 302	43/4 5	Yes	
74 kW; 81 kW TDI 85 kW CL, GL	Standard tyres	195/60 R 14 86H	6 J x 14 ⇒ page 302	43/4 5	Yes	
	Modification	195/60 R 14 85H* ⇒ page 299	6 J x 14 ⇒ page 302	43/4 5	Yes	
		195/50 R 15 82H	6 J x 15 ⇒ page 305	45	Yes	
	Winter tyres	175/65 R 14 82Q	6 J x 14 ⇒ page 302	43/4 5	Yes	
	Estate „Special“ 85 kW GT	Standard tyres	195/60 R 15 82V	6 J x 15 ⇒ page 305	45	Yes
Modification		195/60 R 14 85H	6 J x 14 ⇒ page 302	43/4 5	Yes	
		195/50 R 15 82H	6 J x 15 ⇒ page 305	45	Yes	
Winter tyres		175/65 R 14 82Q	6 J x 14 ⇒ page 302	43/4 5	Yes	



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
Estate Syncro 66 kW TDI 66 kW petrol engine	Standard tyres	195/60 R 14 86T* ⇒ page 299	6 J x 14 ⇒ page 305	43/4 5	Yes	Syncro vehicles: Snow chains are permitted on the front wheels only.
		195/60 R 14 85T	6 J x 14 ⇒ page 305	43/4 5	Yes	
	Modification	No changes are permissible apart from the standard wheel and tyre combinations!				
	Winter tyres	195/60 R 14 85Q* ⇒ page 299	6 J x 14 ⇒ page 305	43/4 5	Yes	
Estate Syncro 85 kW	Standard tyres	195/60 R 14 86H	6 J x 14 ⇒ page 305	43/4 5	Yes	
	Modification	No changes are permissible apart from the standard wheel and tyre combinations!				
	Winter tyres	195/60 R 14 86Q	6 J x 14 ⇒ page 305	43/4 5	Yes	
Estate Syncro 140 kW VR6	Standard tyres	205/50 R 15 86W	6 1/2 J x 15 ⇒ page 308	43	Yes	**Tyres with this double rating were offered by tyre dealers only during a transition period after which W tyres were offered.
	Modification	205/50 ZR 15 86W** ⇒ page 301	6 1/2 J x 15 ⇒ page 308	43	Yes	
	Winter tyres	185/55 R 15 81T reinforced	6 J x 15 ⇒ page 307	35	Yes	

Tyre pressures can be found on the inside of the fuel tank flap or in ⇒ Maintenance ; Booklet 35 .

35.2 Wheel allocation for Golf Estate type 1HX0, Golf Estate Syncro type 1HX1, Golf Estate type 1H

Explanation of information on wheels ⇒ [page 57](#)

Torque specifications for wheel bolts ⇒ Running gear; Rep. gr. 40 ; Repairing front suspension (basic running gear); Removing and installing wheel bearing, strut, drive shaft (basic suspension) or ⇒ Running gear; Rep. gr. 40 ; Repairing front suspension (plus running gear); Removing and installing wheel bearing, strut (plus running gear)

Pitch circle diameter: 100 mm



35.2.1 5 1/2 J x 13




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 299](#) .

Estate 1.4l with manual gearbox


1H0 601 025 A - Wheel and tyre combination ⇒ [page 299](#)

Size:	5 1/2 J x 13
Wheel offset in mm:	38
Wheel load in kg:	450
Number of wheel bolt holes:	4

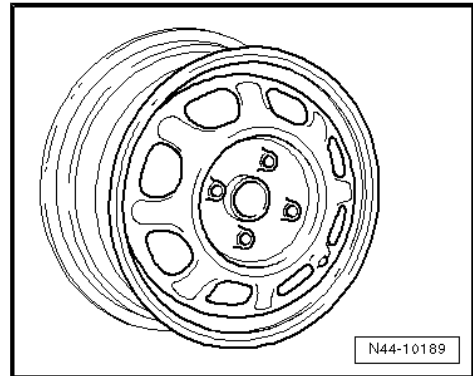

321 601 025 J/M - Wheel and tyre combination ⇒ [page 299](#)

Size:	5 1/2 J x 13
Wheel offset in mm:	38
Wheel load in kg:	460
Number of wheel bolt holes:	4

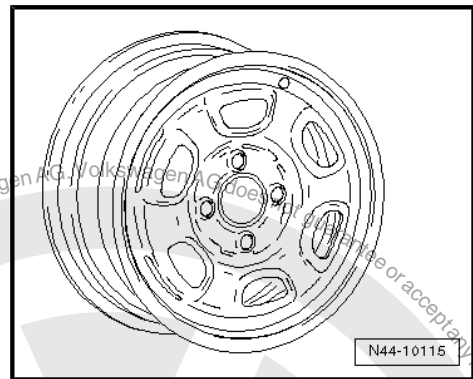

35.2.2 6 J x 14



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 299](#) .


Golf Estate to 85 kW petrol engine, Golf Estate to 55 kW diesel engine with manual gearbox

811 601 025 P - Wheel and tyre combination ⇒ [page 299](#)

Note

This rim is allowed only for vehicles with a maximum permitted axle load of 880 kg.


Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	440
Number of wheel bolt holes:	4

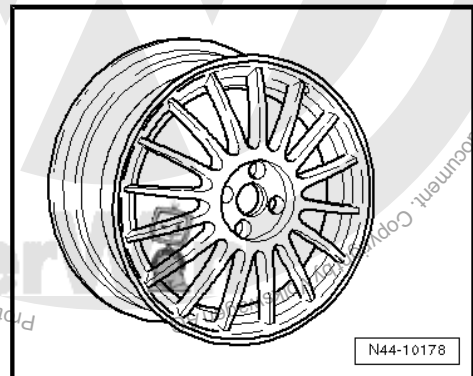




1H0 601 025 D - Wheel and tyre combination ⇒ page 299

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	450
Number of wheel bolt holes:	4

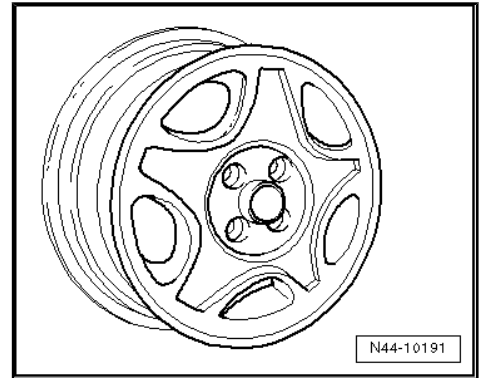


1H0 601 025 AE - Wheel and tyre combination ⇒ page 299

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	480
Number of wheel bolt holes:	4

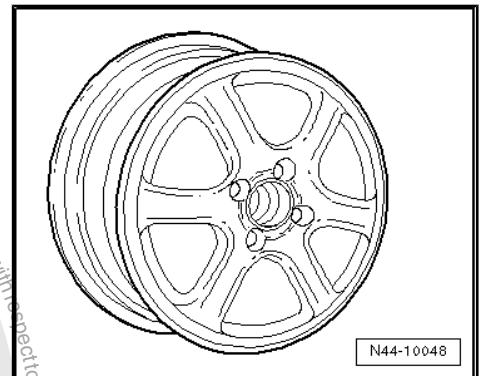


1H0 601 027 - Wheel and tyre combination ⇒ page 299

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	500
Number of wheel bolt holes:	4

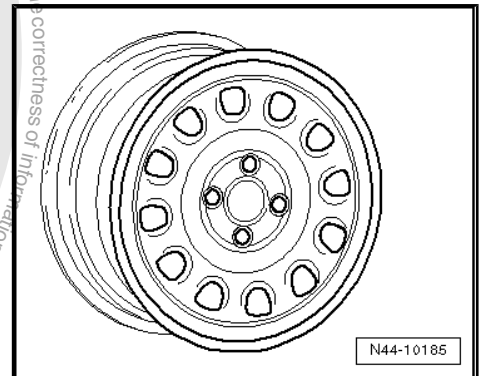

1H0 601 027 A - Wheel and tyre combination ⇒ page 299

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	500
Number of wheel bolt holes:	4

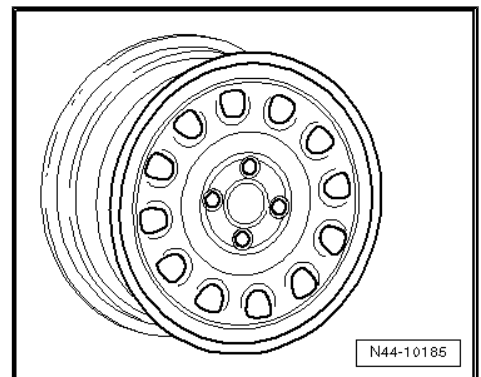


Estate to 85 kW petrol and diesel engines




1H0 601 025 P - Wheel and tyre combination ⇒ page 299

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	460
Number of wheel bolt holes:	4

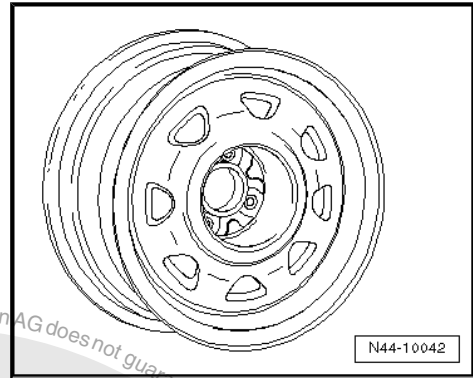


1HM 601 025 - Wheel and tyre combination ⇒ page 299

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	460
Number of wheel bolt holes:	4

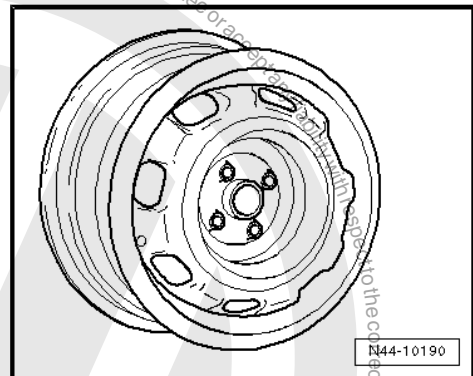


1H0 601 025 B - Wheel and tyre combination ⇒ page 299

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	460
Number of wheel bolt holes:	4

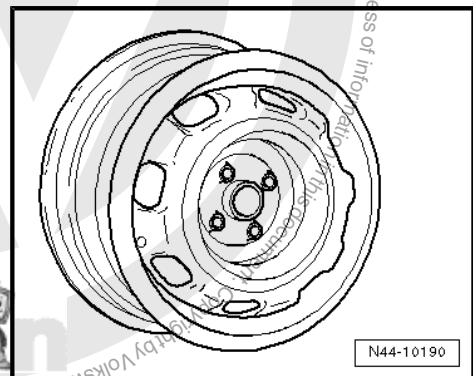

1H0 601 027 A - Wheel and tyre combination ⇒ page 299

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	500
Number of wheel bolt holes:	4

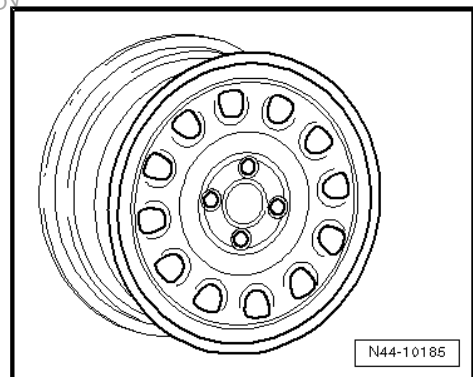




1H0 601 025 R - Wheel and tyre combination ⇒ page 299


Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	500
Number of wheel bolt holes:	4

Estate Syncro to 85 kW petrol and diesel engines

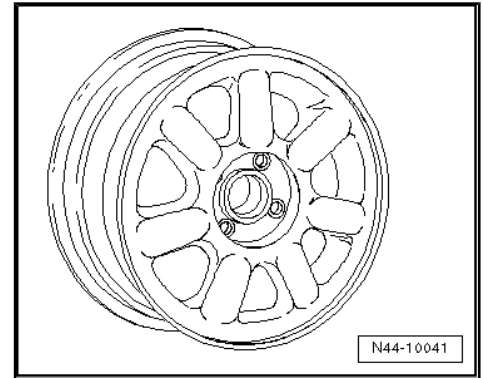


1H1 601 027 - Wheel and tyre combination ⇒ page 301

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	480
Number of wheel bolt holes:	4

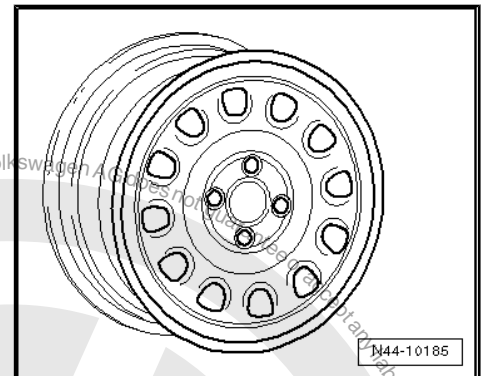


1H1 601 027 A - Wheel and tyre combination ⇒ page 301

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	500
Number of wheel bolt holes:	4

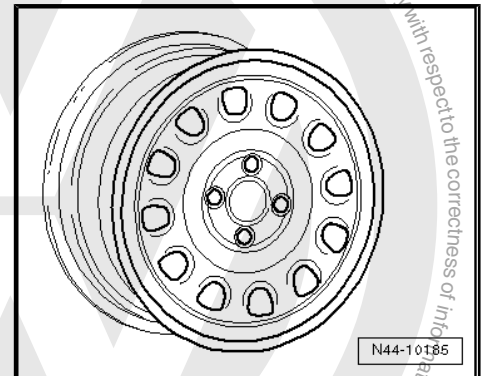

1H0 601 025 R - Wheel and tyre combination ⇒ page 301

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	500
Number of wheel bolt holes:	4

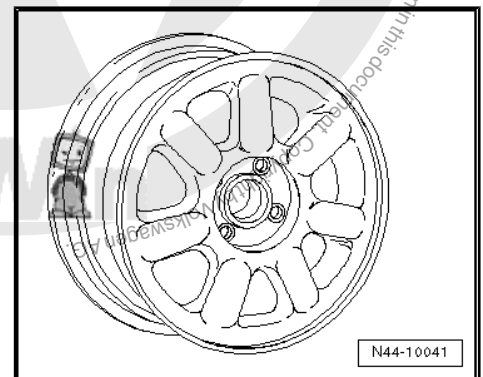

35.2.3 6 J x 15


	<p>Caution</p> <p><i>Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 299 .</i></p>
--	---



Golf Estate to 85 kW petrol engine, Golf Estate to 55 kW diesel engine with manual gearbox


1H0 601 025 E - Wheel and tyre combination ⇒ [page 299](#)

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	450
Number of wheel bolt holes:	4

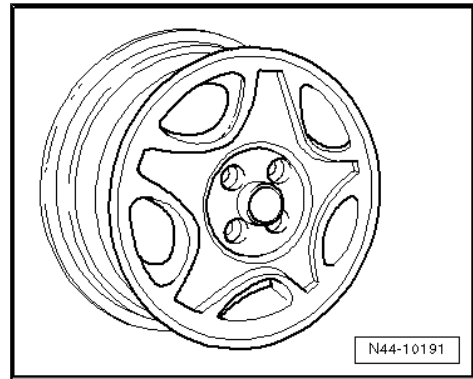


1H0 601 025 L - Wheel and tyre combination ⇒ [page 299](#)

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	450
Number of wheel bolt holes:	4

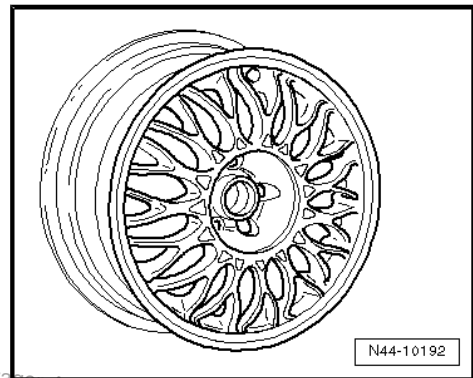


1H0 601 025 Q - Wheel and tyre combination ⇒ [page 299](#)

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	450
Number of wheel bolt holes:	4

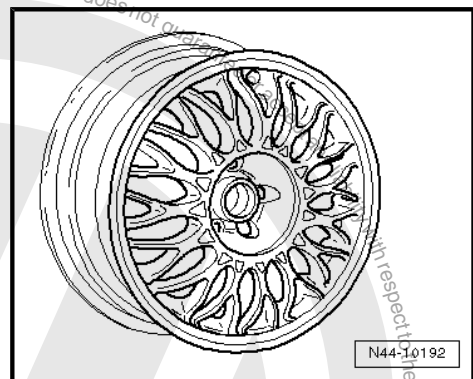

1H0 601 025 AD - Wheel and tyre combination ⇒ [page 299](#)

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	460
Number of wheel bolt holes:	4

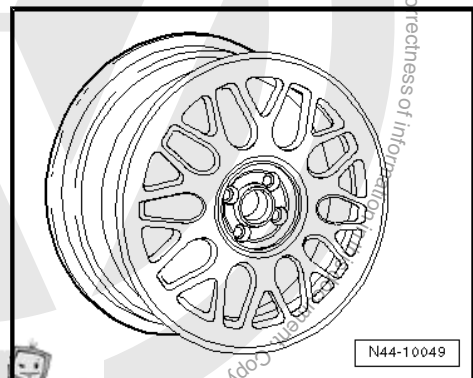


Estate to 85 kW petrol and diesel engines




1H0 601 025 AD - Wheel and tyre combination ⇒ page 299

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	460
Number of wheel bolt holes:	4

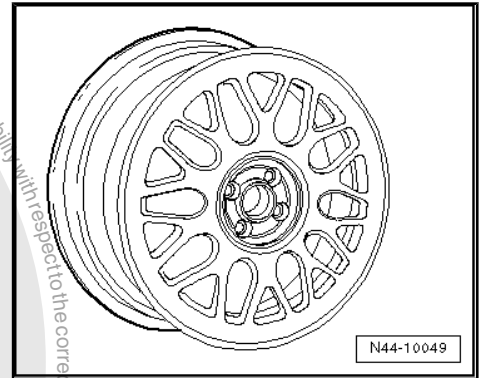

1H0 601 025 AE - Wheel and tyre combination ⇒ page 299


Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	480
Number of wheel bolt holes:	4

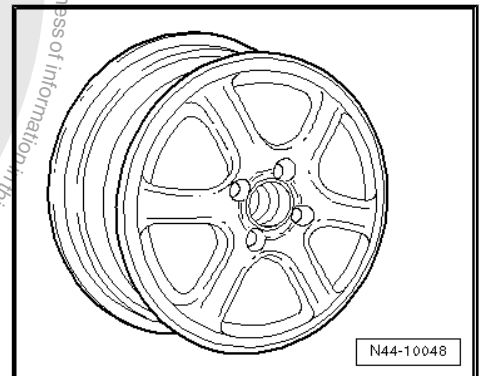

VR6 Syncro - possible only for winter tyres


3A0 601 027 - Wheel and tyre combination ⇒ page 301

Size:	6 J x 15
Wheel offset in mm:	35
Wheel load in kg:	530
Number of wheel bolt holes:	5

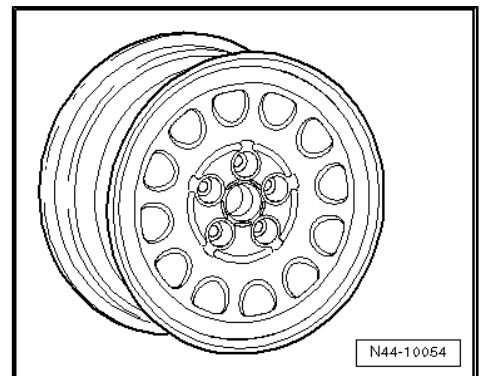

1H0 601 025 J - Wheel and tyre combination ⇒ page 301

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	530
Number of wheel bolt holes:	5

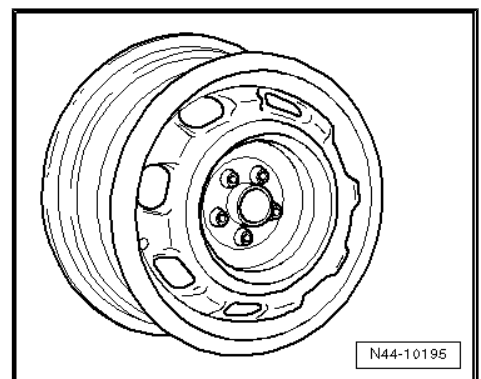




35.2.4 6¹/₂ J x 15

VR6 Syncro

1H0 601 025 AA - Wheel and tyre combination ⇒ [page 301](#)

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	43
Wheel load in kg:	500
Number of wheel bolt holes:	5

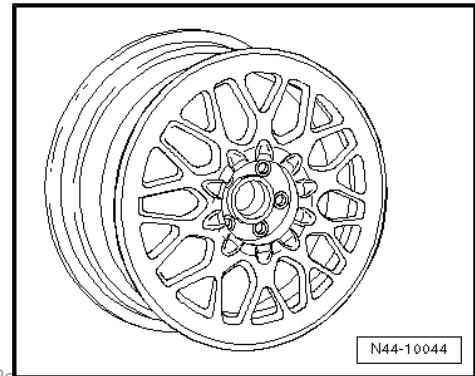



36 Golf estate model year 1999 to model year 2006, Bora estate model year 1999 to model year 2005

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of genuine Volkswagen spare parts only. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to disc-type wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

36.1 Golf Estate, Golf Estate 4Motion, Bora Estate, Bora Estate 4Motion, type 1J

Golf estate, Golf estate 4Motion; type 1J model year 1999 to model year 2006

Bora estate, Bora estate 4Motion; type 1J model year 1999 to model year 2005

Appendix 2 to Parts Certificate 1958/04



Type Approval No.: e1*96/79*0071*08 to e1*96/79*0071*09

Type Approval No.: e1*98/14*0071*10 to e1*98/14*0071*30

Type Approval No.: e1*2001/116*0071*31 to e1*2001/116*0071*36

Overview

Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
1.4l 55 kW petrol engine; 1.9l 50 kW diesel engine	Standard tyres	195/65 R 15 91T	6 J x 15 ⇒ page 312	38	Yes	General information on: ♦ Winter tyres ⇒ page 14 ♦ Snow chains ⇒ page 17 Tyre makes recommended by Volkswagen: ♦ Summer tyres ⇒ page 472 ♦ All-season tyres ⇒ page 485 ♦ Winter tyres ⇒ page 498
	Modification	205/55 R 16 91H	6 ¹ / ₂ J x 16 ⇒ page 316	42	No	
		225/45 R 17 91W	7 J x 17 ⇒ page 320	38	No	
	Winter tyres	195/65 R 15 91Q/T	6 J x 15 ⇒ page 312	38	Yes	
		205/55 R 16 91T/H	5 ¹ / ₂ J x 16 ⇒ page 315	36	Yes	
	1.9l 66 kW TDI	Standard tyres	195/65 R 15 91T	6 J x 15 ⇒ page 312	38	
Modification		205/55 R 16 91H	6 ¹ / ₂ J x 16 ⇒ page 316	42	No	
		225/45 R 17 91W	7 J x 17 ⇒ page 320	38	No	
		225/45 R 17 91W	7 ¹ / ₂ J x 17 ⇒ page 323	38	No	
Winter tyres		195/65 R 15 91Q/T	6 J x 15 ⇒ page 312	38	Yes	
		205/55 R 16 91T/H	5 ¹ / ₂ J x 16 ⇒ page 315	36	Yes	



Protected by copyright. Copying for private or commercial purposes, in paper or in electronic form, is not permitted unless authorised by Volkswagen AG. Volkswagen AG. Copying for private or commercial purposes, in paper or in electronic form, is not permitted unless authorised by Volkswagen AG. Copying for private or commercial purposes, in paper or in electronic form, is not permitted unless authorised by Volkswagen AG.



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
1.6l 74 kW, 75 kW, 77 kW, 81 kW, 2.0l 85 kW petrol engine; 2.0l 85 kW BI FUEL 1.9l 74 kW, 81 kW, 85 kW TDI	Standard tyres	195/65 R 15 91H	6 J x 15 ⇒ page 312	38	Yes	The adhesive weights for balancing must be attached to the inner side of the rim of 6 ¹ / ₂ J x 16 aluminium wheels! 4Motion vehicles: Snow chains are permitted on the front wheels only.
	Modification	205/55 R 16 91H	6 ¹ / ₂ J x 16 ⇒ page 316	42	No	
		225/45 R 17 91W	7 J x 17 ⇒ page 320	38	No	
		225/45 R 17 91W	7 ¹ / ₂ J x 17 ⇒ page 323	38	No	
	Winter tyres	195/65 R 15 91Q/T	6 J x 15 ⇒ page 312	38	Yes	
		205/55 R 16 91T/H	5 ¹ / ₂ J x 16 ⇒ page 315	36	Yes	
1.8l 92 kW; 1.8l 110 kW; 2.3l 110 kW petrol engines; 1.9l 96 kW TDI; 1.9l 110 kW TDI	Standard tyres	195/65 R 15 91V	6 J x 15 ⇒ page 312	38	Yes	
	Modification	205/55 R 16 91V	6 ¹ / ₂ J x 16 ⇒ page 316	42	No	
		225/45 R 17 91W	7 J x 17 ⇒ page 320	38	No	
		225/45 R 17 91W	7 ¹ / ₂ J x 17 ⇒ page 323	38	No	
	Winter tyres	195/65 R 15 91Q/T	6 J x 15 ⇒ page 312	38	Yes	
		205/55 R 16 91T/H	5 ¹ / ₂ J x 16 ⇒ page 315	36	Yes	
1.8l 132 kW; 2.3l 125 kW	Standard tyres	205/55 R 16 91W	6 ¹ / ₂ J x 16 ⇒ page 318	42	No	
	Modification	205/55 R 16 91H	6 ¹ / ₂ J x 16 ⇒ page 318	42	No	
		225/45 R 17 91W	7 J x 17 ⇒ page 320	38	No	
		225/45 R 17 91W	7 ¹ / ₂ J x 17 ⇒ page 323	38	No	



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
	Winter tyres	205/55 R 16 91T/H	5 ¹ / ₂ J x 16 ⇒ page 315	36	Yes	
2,8l 150 kW	Standard tyres	205/55 R 16 91W	6 ¹ / ₂ J x 16 ⇒ page 318	42	No	
	Modification	225/45 R 17 91W	7 J x 17 ⇒ page 320	38	No	
		225/45 R 17 91W	7 ¹ / ₂ J x 17 ⇒ page 323	38	No	
	Winter tyres	205/55 R 16 91T/H	5 ¹ / ₂ J x 16 ⇒ page 315	36	Yes	

Tyre pressures can be found on the inside of the fuel tank flap or in ⇒ Maintenance ; Booklet 37 .

36.2 Wheel allocation for Golf Estate, Golf Estate 4Motion, Bora Estate, Bora Estate 4Motion, type 1J

Wheel allocation Golf estate, Golf estate 4Motion; type 1J model year 1999 to model year 2006

Wheel allocation Bora estate, Bora estate 4Motion; type 1J model year 1999 to model year 2005

Explanation of information on wheels ⇒ [page 57](#)

Wheel bolt torque settings ⇒ Running gear, axles, steering - front and four-wheel drive; Rep. gr. 44 ; Wheel bolt torque settings

Pitch circle diameter 100 mm

Number of wheel bolt holes: 5

36.2.1 6 J x 15



Caution


Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 310](#) .



For vehicles with maximum permitted axle load of 1000 kg

1J0 601 025 B, 1J0 601 025 AA - Wheel and tyre combination
 ⇒ [page 310](#)


Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	500

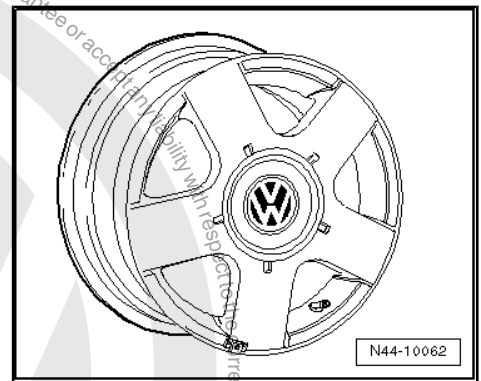

For vehicles with maximum permitted axle load of 1060 kg

1J0 601 025 Q - Wheel and tyre combination ⇒ [page 310](#)


Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	530

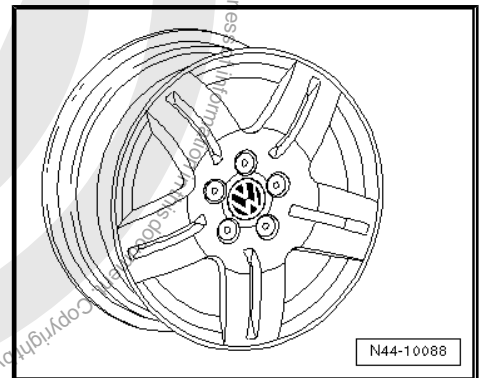

For vehicles up to and including 96 kW and petrol engines to 110 kW


1J0 601 027 K - Wheel and tyre combination ⇒ [page 310](#)

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	550

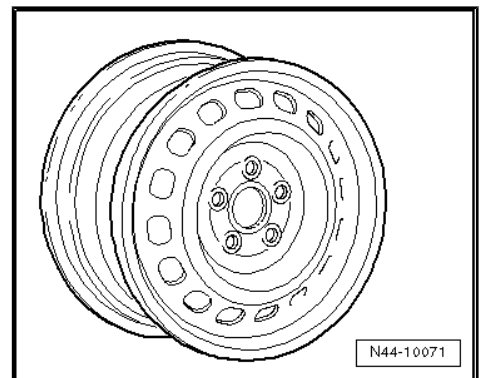

1J0 601 027 H, 1J0 601 027 Q - Wheel and tyre combination
 ⇒ [page 310](#)


Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	550

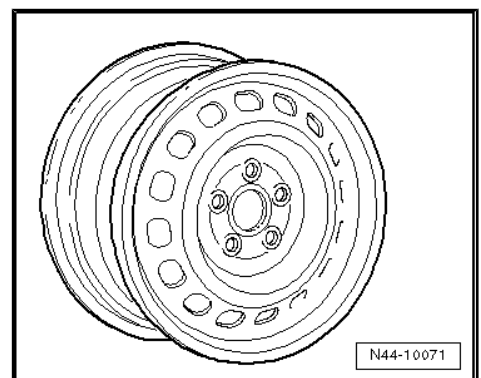




1J0 601 025 AK - Wheel and tyre combination ⇒ page 310

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	580

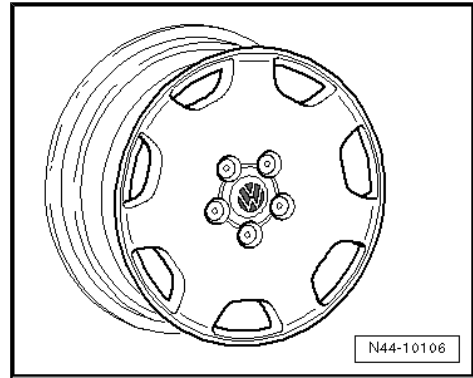


1J0 601 025 P, 1J0 601 025 AL - Wheel and tyre combination ⇒ page 310

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	550

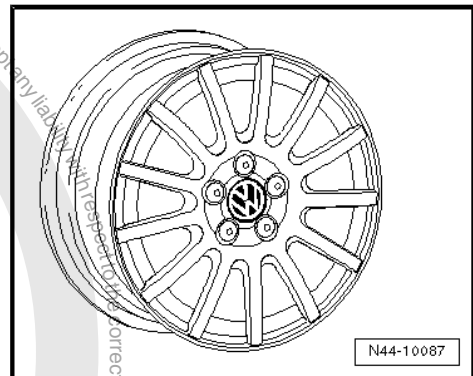


1C0 601 025 F - Wheel and tyre combination ⇒ page 310

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	550

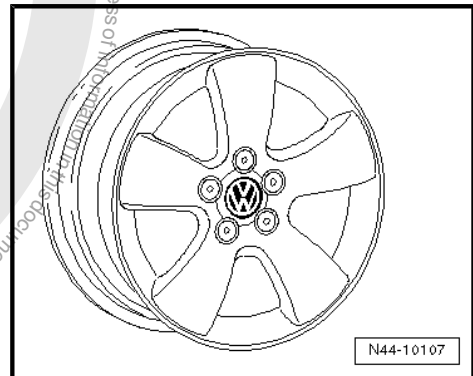

1J0 601 025 BD - Wheel and tyre combination ⇒ page 310

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	580

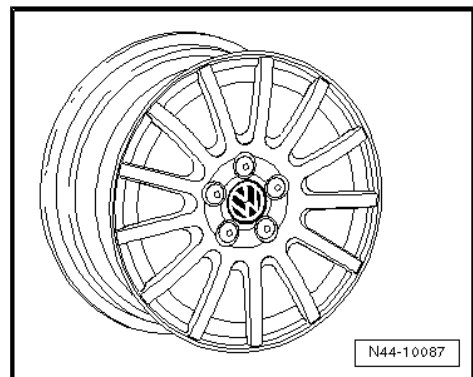


For vehicles with 110 kW TDI and petrol engines 1.8l 132 kW, 2.3l 125 kW, 2.8l 150 kW




1J0 601 025 P, 1J0 601 025 AL - Wheel and tyre combination
 ⇒ [page 311](#)

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	550

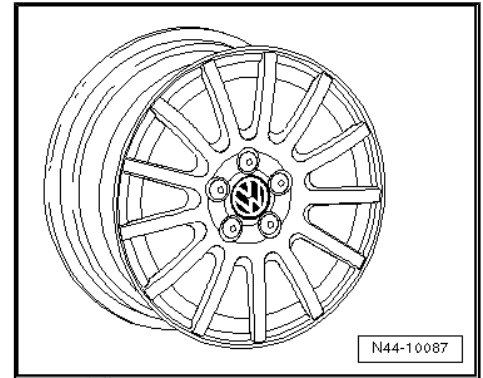


1J0 601 025 BD - Wheel and tyre combination ⇒ [page 311](#)

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	580

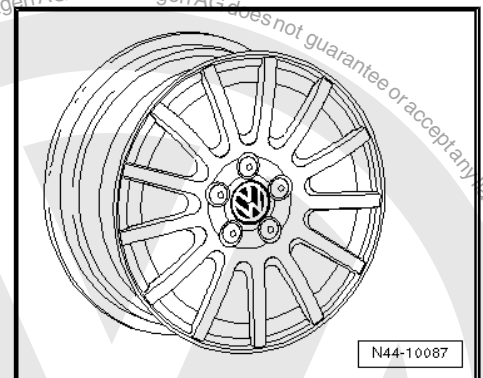

36.2.2 5¹/₂ J x 16



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 310](#) .


For vehicles up to and including 96 kW and petrol engines to 110 kW

For vehicles with 110 kW TDI and petrol engines 1.8l 132 kW, 2.3l 125 kW, 2.8l 150 kW

Snow tyres

1J0 601 025 M, 1J0 601 025 AF - Wheel and tyre combination
 ⇒ [page 310](#)


Size:	5 ¹ / ₂ J x 16
Wheel offset in mm:	36
Wheel load in kg:	550

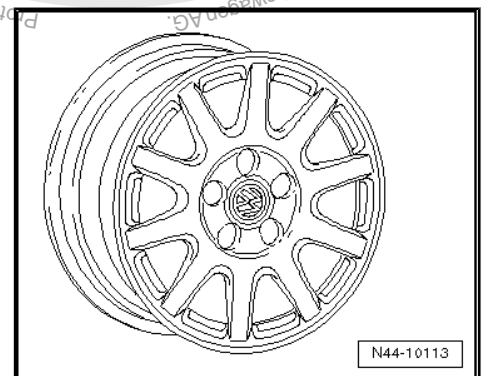



1J0 601 025 AP - Wheel and tyre combination ⇒ page 310

Size:	5 ¹ / ₂ J x 16
Wheel offset in mm:	36
Wheel load in kg:	550

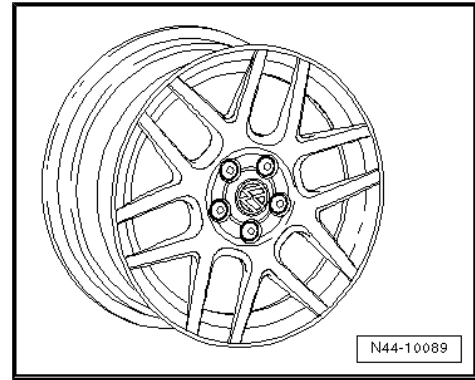

36.2.3 6¹/₂ J x 16




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 310 .

For vehicles with maximum permitted axle load of 1000 kg
1C0 601 025 A, 1C0 601 025 D - Wheel and tyre combination
⇒ page 310


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	500

For vehicles with maximum permitted axle load of 1060 kg

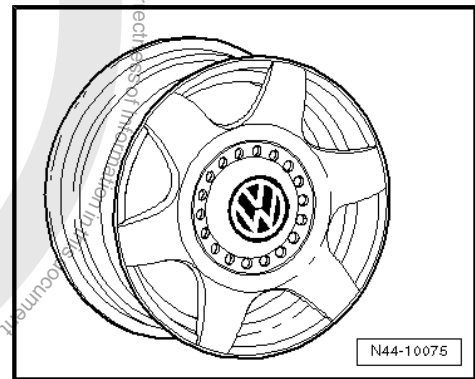

1J0 601 025 F, 1J0 601 025 AC - Wheel and tyre combination
⇒ page 310


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	530

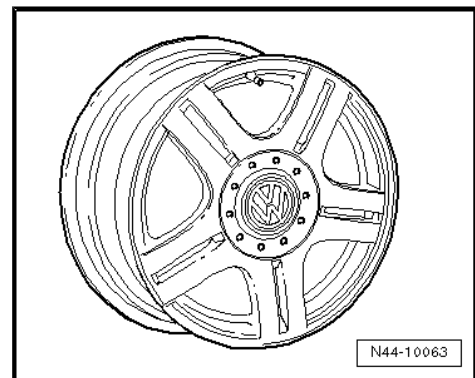




1J0 601 025 E, 1J0 601 025 AD - Wheel and tyre combination
 ⇒ [page 310](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	530

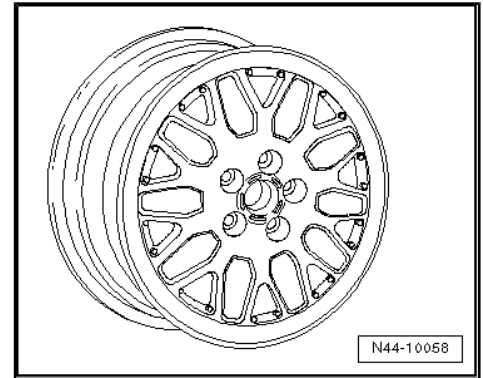

1J0 601 025 H, 1J0 601 025 AH - Wheel and tyre combination
 ⇒ [page 310](#)


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	530

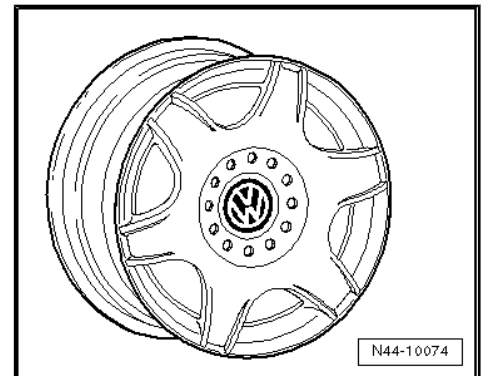

For vehicles up to and including 96 kW and petrol engines to 110 kW


1J0 601 027 R - Wheel and tyre combination ⇒ [page 310](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

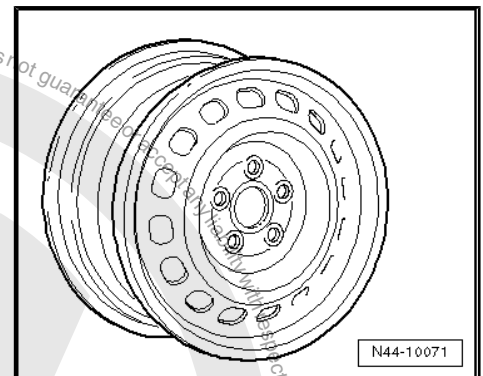

1J0 601 025 L, 1J0 601 025 AE - Wheel and tyre combination
 ⇒ [page 310](#)


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

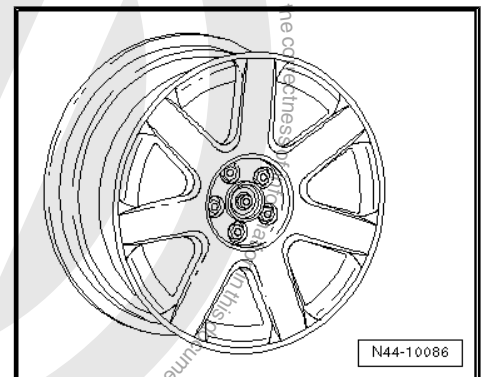




1J0 601 025 R, 1J0 601 025 AN - Wheel and tyre combination
⇒ [page 310](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

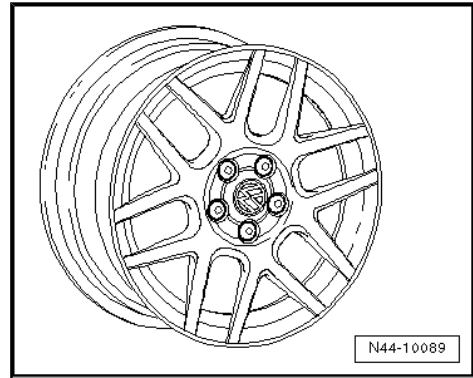


1J0 601 025 T, 1J0 601 025 AJ - Wheel and tyre combination
⇒ [page 310](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

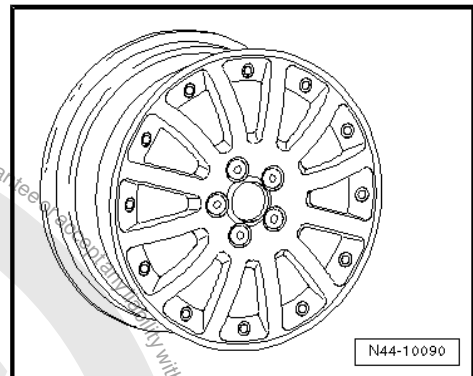


1C0 601 025 G - Wheel and tyre combination ⇒ [page 310](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

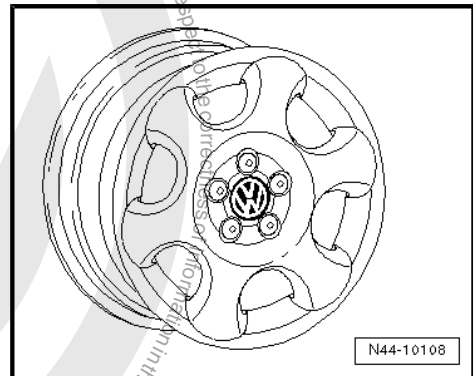

1C0 601 025 H - Wheel and tyre combination ⇒ [page 310](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

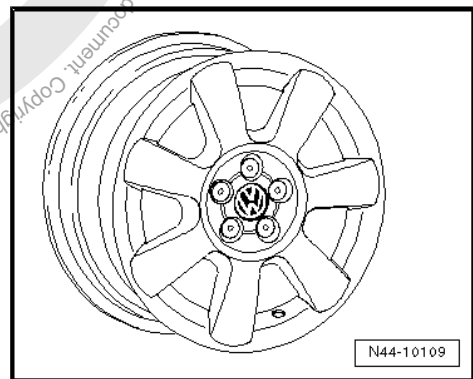


For vehicles with 110 kW TDI and petrol engines 1.8l 132 kW, 2.3l 125 kW, 2.8l 150 kW



1J0 601 027 L, 1J0 601 027 R - Wheel and tyre combination
 ⇒ [page 311](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

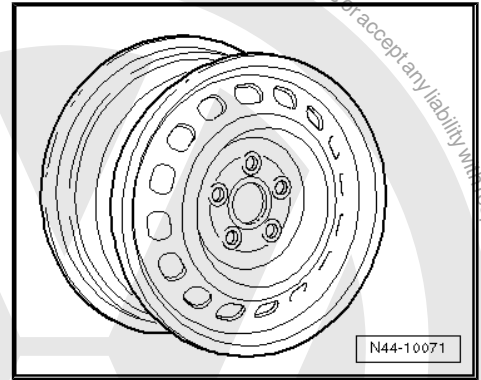


1J0 601 025 F, 1J0 601 025 AC - Wheel and tyre combination
 ⇒ [page 311](#)



Note


This rim is allowed only for vehicles with a maximum permitted axle load of 1060 kg.

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	530

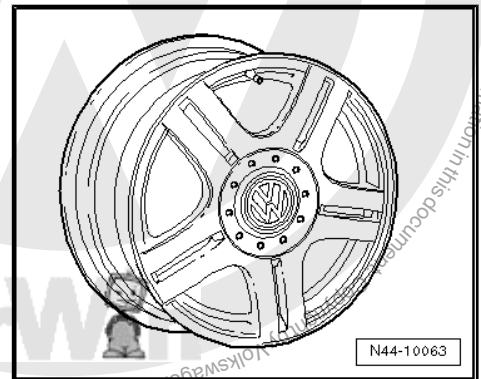


1J0 601 025 L - Wheel and tyre combination ⇒ [page 311](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

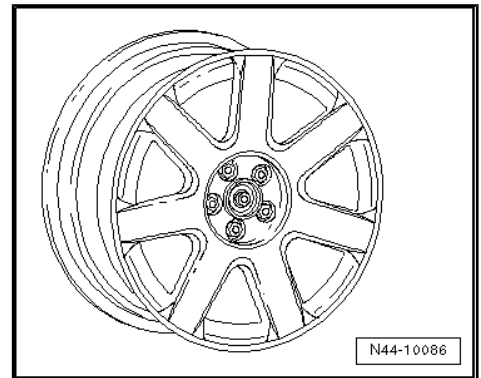

1J0 601 025 AN, 1J0 601 025 R - Wheel and tyre combination
 ⇒ [page 311](#)


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

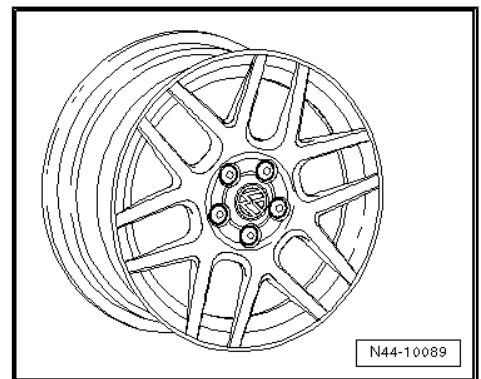




1J0 601 025 T, 1J0 601 025 AJ - Wheel and tyre combination
⇒ [page 311](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

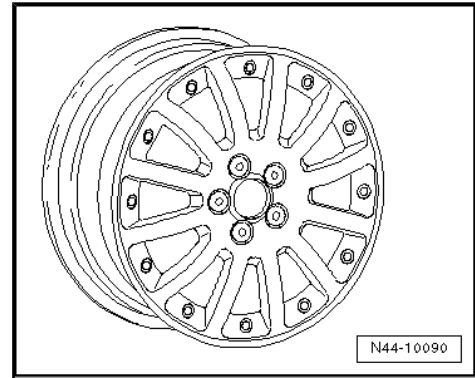


1C0 601 025 G - Wheel and tyre combination ⇒ [page 311](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

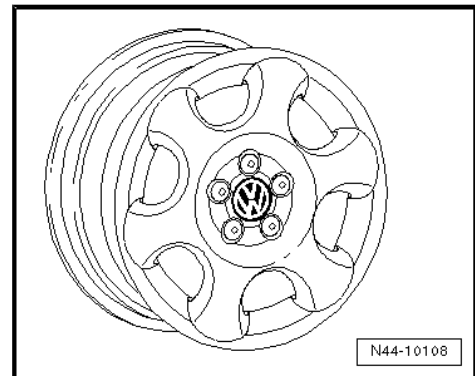

1C0 601 025 H - Wheel and tyre combination ⇒ [page 311](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

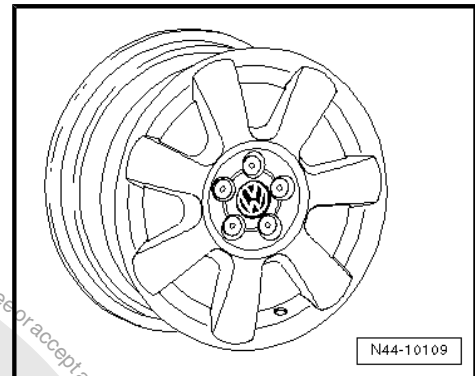

36.2.4 7 J x 17

The following wheels are permitted only if the stated conditions
⇒ [page 323](#) are fulfilled.




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 310](#) .




1J0 601 025 J, 1J0 601 025 S - Wheel and tyre combination
 ⇒ [page 310](#)

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	580

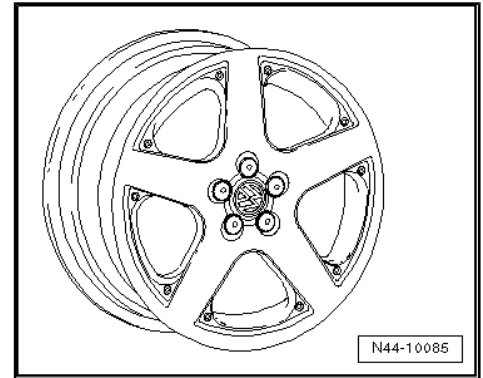


1J0 601 025 AB - Wheel and tyre combination ⇒ [page 310](#)

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

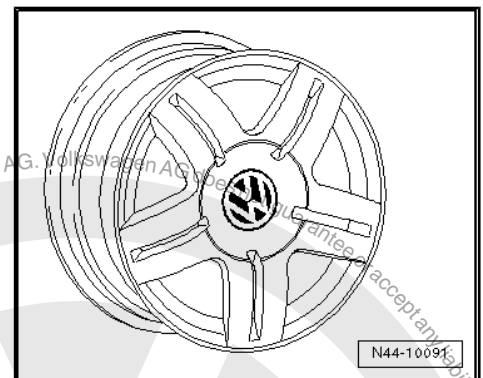


1C0 601 025 B, 1C0 601 025 E - Wheel and tyre combination
 ⇒ [page 310](#)

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

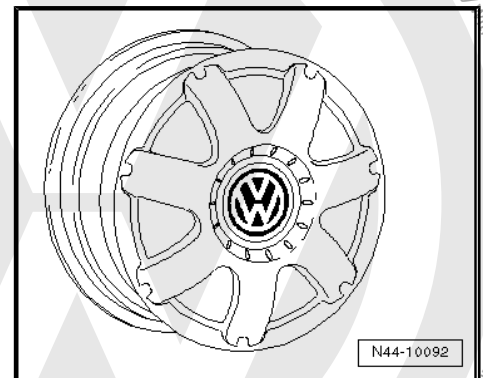

1C0 601 025 J - Wheel and tyre combination ⇒ [page 310](#)

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

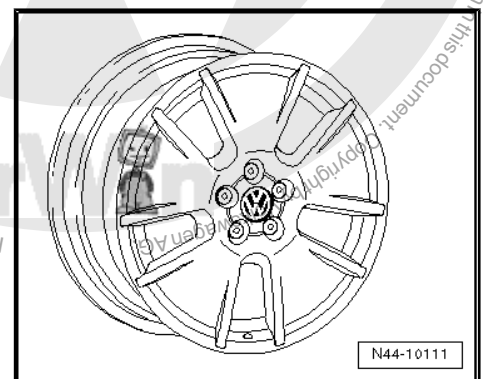




1C0 601 025 K, 1C0 601 025 Q - Wheel and tyre combination
⇒ [page 310](#)


Alloy disc-type wheels with exchangeable trim elements
⇒ [page 58](#)

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

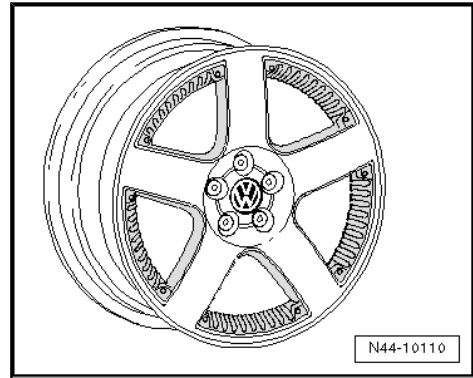


1J0 601 025 BE - Wheel and tyre combination ⇒ [page 310](#)

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

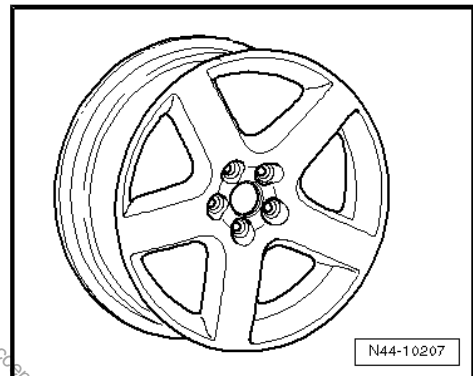


1J0 601 025 AS - Wheel and tyre combination ⇒ [page 310](#)

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

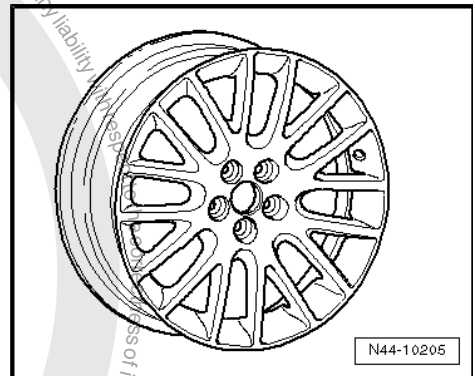

1C0 601 025 M - Wheel and tyre combination ⇒ [page 310](#)

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

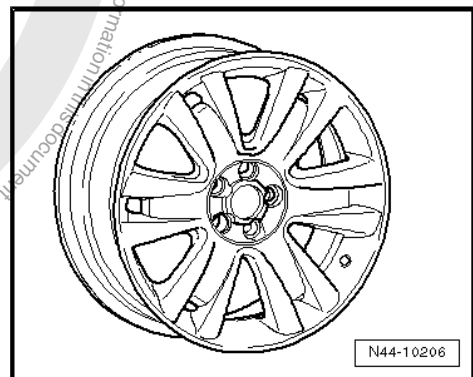




36.2.5 7 1/2 J x 17

The following wheels are permitted only if the stated conditions
⇒ [page 323](#) are fulfilled.

	Caution
<i>Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 310 .</i>	


1J0 601 025 BF - Wheel and tyre combination ⇒ [page 310](#)

Size:	7 1/2 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

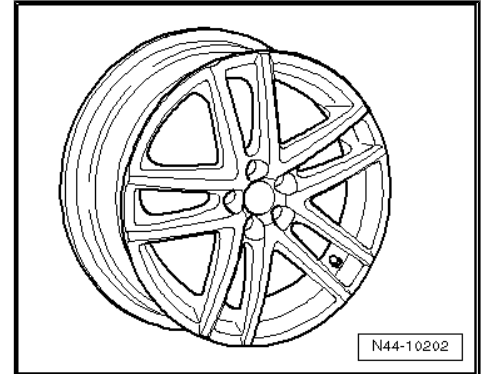

1J0 601 025 BH - Wheel and tyre combination ⇒ [page 310](#)

Size:	7 1/2 J x 17
Wheel offset in mm:	38
Wheel load in kg:	560

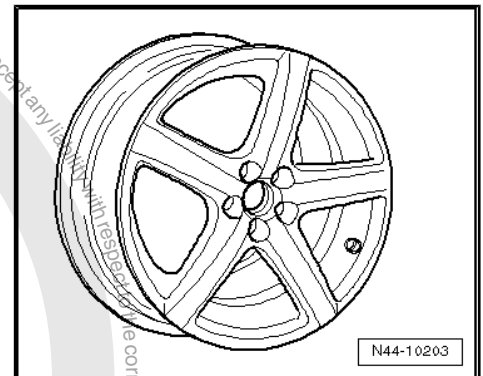

36.3 Conditions for fitting 17" wheels and tyres

17" wheels with 225/45 R 17 are possible only:

1. For vehicles from model year 2001.
2. If 17" sports running gear and a steering box with reduced steering arm travel are installed in the vehicle

Allocation of steering box PR No. to engine:	
PR No. of steering box	Engine
QZ 3 ⁹⁾	1.8l; 2.0l; 2.3l petrol engines; 1.9l diesel engines
QZ 4 ⁹⁾	Up to and including 1.6 l petrol engines
QZ 5 ⁹⁾	VR6 (US version); VR6 4Motion

9) Replacement part numbers ⇒ Electronic parts catalogue „ETKA“

3. If tyres with a maximum width of 218 mm are used.




4. If snow chains are not used.

Maximum width of 17" tyres

If a vehicle is retrofitted with 17" tyres or if existing 17" tyres are renewed, use only tyres with a maximum width -a- which does not exceed 218 mm during use ¹⁰⁾.

10) The measured width of the tyre including lettering on 7 J x 17 or 7¹/₂ J x 17 and at the specified tyre pressure.

If wider tyres are used, under certain circumstances, the tyres may contact the front axle and the bodywork while the car is being driven.

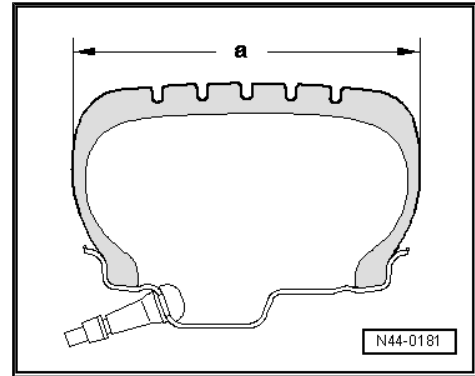



37 Golf Variant model year 2007 to model year 2010

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of only genuine Volkswagen spare parts. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

37.1 Golf Variant, Golf Variant 4Motion; type 1KM model year 2007 to model year 2008

Attachment to parts certificate 3878/08

The parts certificate can be found on the Volkswagen ServiceNet under Accessories/Tyres, Wheels and Tyres, Wheels and Tyres Guide.

Type approval number: e1*2001/116*0328*07 to e1*2001/116*0328*11

Overview

Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
1.6l 75 kW; 1.4l 59 kW petrol engine	Standard tyres	195/65 R 15 91T	6 J x 15 ⇒ page 331	47	Yes	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks	
1.9l 77 kW TDI diesel engine with automatic gearbox	Modification	195/65 R 15 91H/V	6 J x 15 ⇒ page 331	47	Yes	Tyre makes recommended by Volkswagen: ♦ Summer tyres ⇒ page 474 ♦ All-season tyres ⇒ page 485 ♦ Winter tyres ⇒ page 499 * The 225/40 R 18 92Y tyre on the 7 ¹ / ₂ J x 18 off-set 51 rim is permitted only on vehicles with sports running gear and rear axle camber of -1°45'! ⇒ page 340	
		195/65 R 15 91T/H/V	6 ¹ / ₂ J x 15 ⇒ page 332	50	Yes		
		205/60 R 15 91T/H/V	6 J x 15 ⇒ page 331	47	Yes		
		205/55 R 16 91T/H/V	6 ¹ / ₂ J x 16 ⇒ page 334	50	No		
		225/45 R 17 91T/H/V	7 J x 17 ⇒ page 338	54	No		
		225/40 R 18 92Y* ⇒ page 326	7 ¹ / ₂ J x 18 ⇒ page 340	51	No		
	Winter tyres	195/65 R 15 91Q/T/H	6 J x 15 ⇒ page 331	47	Yes		
		205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 333	50	Yes		
	1.4l 90 kW petrol engine	Standard tyres	195/65 R 15 91H	6 J x 15 ⇒ page 331	47		Yes
	1.9l 77 kW TDI diesel engine with manual gearbox and front-wheel drive 2.0l 100 kW TDI; 2.0l 103 kW TDI; diesel engines	Modification	195/65 R 15 91V	6 J x 15 ⇒ page 331	47		Yes
195/65 R 15 91H/V			6 ¹ / ₂ J x 15 ⇒ page 332	50	Yes		
205/60 R 15 91H/V			6 J x 15 ⇒ page 331	47	Yes		
205/55 R 16 91H/V/W			6 ¹ / ₂ J x 16 ⇒ page 334	50	No		
225/45 R 17 91H/V/W			7 J x 17 ⇒ page 338	54	No		



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
		225/40 R 18 92Y* ⇒ page 326	7 ¹ / ₂ J x 18 ⇒ page 340	51	No	
	Winter tyres	195/65 R 15 91Q/T/H	6 J x 15 ⇒ page 331	47	Yes	
		205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 333	50	Yes	
1.9l 77 kW TDI diesel engine with manual gearbox and 4Motion	Standard tyres	205/55 R 16 91T/H/V	6 ¹ / ₂ J x 16 ⇒ page 334	50	No	
	Modification	225/45 R 17 91T/H/V	7 J x 17 ⇒ page 338	54	No	
		225/40 R 18 92Y* ⇒ page 326	7 ¹ / ₂ J x 18 ⇒ page 340	51	No	
	Winter tyres	205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 333	50	Yes	
1.4l 103 kW; petrol engine	Standard tyres	205/55 R 16 91V	6 ¹ / ₂ J x 16 ⇒ page 334	50	No	
	Modification	195/65 R 15 91V	6 J x 15 ⇒ page 331	47	Yes	
		195/65 R 15 91V	6 ¹ / ₂ J x 15 ⇒ page 332	50	Yes	
		205/60 R 15 91V	6 J x 15 ⇒ page 331	47	Yes	
		205/55 R 16 91V/W	6 ¹ / ₂ J x 16 ⇒ page 334	50	No	
		225/45 R 17 91V/W	7 J x 17 ⇒ page 338	54	No	
		225/40 R 18 92Y* ⇒ page 326	7 ¹ / ₂ J x 18 ⇒ page 340	51	No	
	Winter tyres	195/65 R 15 91Q/T/H	6 J x 15 ⇒ page 331	47	Yes	
		205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 333	50	Yes	
1.4l 125 kW; petrol engine	Standard tyres	205/55 R 16 91V	6 ¹ / ₂ J x 16 ⇒ page 334	50	No	



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
	Modification	225/45 R 17 91V/W	7 J x 17 ⇒ page 338	54	No	
		225/40 R 18 92Y* ⇒ page 326	7 1/2 J x 18 ⇒ page 340	51	No	
	Winter tyres	205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 333	50	Yes	
2.0l 147 kW; petrol engine	Standard tyres	205/55 R 16 91W	6 1/2 J x 16 ⇒ page 334	50	No	
	Modification	225/45 R 17 91W	7 J x 17 ⇒ page 338	54	No	
		225/40 R 18 92Y* ⇒ page 326	7 1/2 J x 18 ⇒ page 340	51	No	
	Winter tyres	205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 333	50	Yes	

Tyre inflation pressures are located on a sticker on inside of fuel tank flap or in ⇒ Maintenance ; Booklet ; Check tyres: condition, profile, inflation pressure, depth of tread .

37.2 Golf Variant, Golf Variant 4Motion; type 1KM model year 2009 to model year 2010

Attachment to parts certificate 3878/08

The parts certificate can be found on the Volkswagen ServiceNet under Accessories/Tyres, Wheels and Tyres, Wheels and Tyres Guide.

Type approval number: e1*2001/116*0328*12 to e1*2001/116*0328*14

Overview

Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
1.6l 75 kW; 1.4l 59 kW petrol engine	Standard tyres	195/65 R 15 91T	6 J x 15 ⇒ page 331	47	Yes	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17
	Modification	195/65 R 15 91H/V	6 J x 15 ⇒ page 331	47	Yes	
1.9l 77 kW TDI diesel engine with front-wheel drive	Modification	195/65 R 15 91H/V	6 J x 15 ⇒ page 331	47	Yes	Tyre makes recom- mended by Volkswa- gen:



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
		195/65 R 15 91T/H/V	6 ¹ / ₂ J x 15 ⇒ page 332	50	Yes	<ul style="list-style-type: none"> ◆ Summer tyres ⇒ page 474 ◆ All-season tyres ⇒ page 485 ◆ Winter tyres ⇒ page 499
		205/60 R 15 91T/H/V	6 J x 15 ⇒ page 331	47	Yes	
		205/55 R 16 91T/H/V	6 ¹ / ₂ J x 16 ⇒ page 334	50	No	
		225/45 R 17 91T/H/V	7 J x 17 ⇒ page 338	54	No	
		225/40 R 18 92Y* ⇒ page 329	7 ¹ / ₂ J x 18 ⇒ page 340	51	No	
	Winter tyres	195/65 R 15 91Q/T/H	6 J x 15 ⇒ page 331	47	Yes	* The 225/40 R 18 92Y tyre on the 7 ¹ / ₂ J x 18 off-set 51 rim is permitted only on vehicles with sports running gear and rear axle camber of -1°45'! ⇒ page 340
		205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 333	50	Yes	
1.9l 77 kW TDI diesel engine with manual gearbox and 4Motion	Standard tyres	205/55 R 16 91T/H/V	6 ¹ / ₂ J x 16 ⇒ page 334	50	No	
	Modification	225/45 R 17 91T/H/V	7 J x 17 ⇒ page 338	54	No	
		225/40 R 18 92Y* ⇒ page 329	7 ¹ / ₂ J x 18 ⇒ page 340	51	No	
	Winter tyres	205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 333	50	Yes	
1.4l 90 kW petrol engine	Standard tyres	195/65 R 15 91H	6 J x 15 ⇒ page 331	47	Yes	
	Modification	195/65 R 15 91V	6 J x 15 ⇒ page 331	47	Yes	
		195/65 R 15 91H/V	6 ¹ / ₂ J x 15 ⇒ page 332	50	Yes	
		205/60 R 15 91H/V	6 J x 15 ⇒ page 331	47	Yes	



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
		205/55 R 16 91H/V/W	6 ¹ / ₂ J x 16 ⇒ page 334	50	No	
		225/45 R 17 91H/V/W	7 J x 17 ⇒ page 338	54	No	
		225/40 R 18 92Y* ⇒ page 329	7 ¹ / ₂ J x 18 ⇒ page 340	51	No	
	Winter tyres	195/65 R 15 91Q/T/H	6 J x 15 ⇒ page 331	47	Yes	
		205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 333	50	Yes	
2.0l 100 kW TDI; 2.0l 103 kW TDI; diesel engine	Standard tyres	205/55 R 16 91H/V/W	6 ¹ / ₂ J x 16 ⇒ page 334	50	No	As of model year 2009: models with a 2.0l 100/103 kW TDI engine will only be equipped with a 16" brake system (PR No. 1LJ). Only wheels as of 16" are permitted!
	Modification	225/45 R 17 91H/V/W	7 J x 17 ⇒ page 338	54	No	
		225/40 R 18 92Y* ⇒ page 329	7 ¹ / ₂ J x 18 ⇒ page 340	51	No	
	Winter tyres	205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 333	50	Yes	
1.4l 103 kW;	Standard tyres	205/55 R 16 91V	6 ¹ / ₂ J x 16 ⇒ page 334	50	No	As of model year 2009: models with a 1.4l 103 kW petrol engine will only be equipped with a 16" brake system (PR No. 1LJ). Only wheels as of 16" are permitted!
	Modification	205/55 R 16 91H/V/W	6 ¹ / ₂ J x 16 ⇒ page 334	50	No	
		225/45 R 17 91H/V/W	7 J x 17 ⇒ page 338	54	No	
		225/40 R 18 92Y* ⇒ page 329	7 ¹ / ₂ J x 18 ⇒ page 340	51	No	
	Winter tyres	205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 333	50	Yes	
1.4l 118 kW; 1.4l 125 kW; 2.0l 147 kW petrol engine	Standard tyres	205/55 R 16 91V	6 ¹ / ₂ J x 16 ⇒ page 334	50	No	



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
	Modification	225/45 R 17 91V/W	7 J x 17 ⇒ page 338	54	No	
		225/40 R 18 92Y* ⇒ page 329	7 1/2 J x 18 ⇒ page 340	51	No	
	Winter tyres	205/55 R 16 91Q/T/H	6 J x 16 ⇒ page 333	50	Yes	

Tyre inflation pressures are located on a sticker on inside of fuel tank flap or in ⇒ Maintenance ; Booklet ; Check tyres: condition, profile, inflation pressure, depth of tread .

37.3 Wheel allocation for Golf Variant, Golf Variant 4Motion; type 1KM model year 2007 to model year 2010


Explanation of information on wheels ⇒ [page 57](#)

Torque specifications for wheel bolts ⇒ Running gear, axles, steering; Rep. gr. 44 ; Torque specifications for fitting wheels

Pitch circle diameter: 112 mm

Number of wheel bolt holes: 5

37.3.1 6 J x 15




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 325](#) .

1K0 601 027 C, 1K0 601 027 H - Wheel and tyre combination
⇒ [page 325](#)


Size:	6 J x 15
Wheel offset in mm:	47
Wheel load in kg:	615

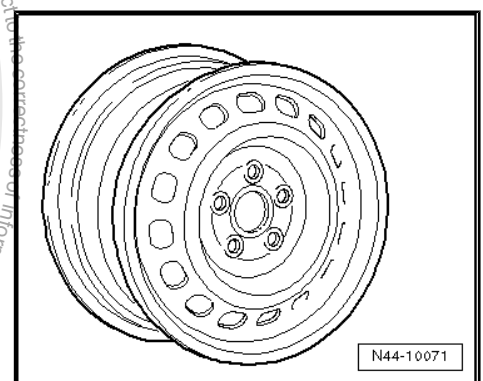




1K0 601,027 T - Wheel and tyre combination ⇒ page 325

Size:	6 J x 15
Wheel offset in mm:	47
Wheel load in kg:	615

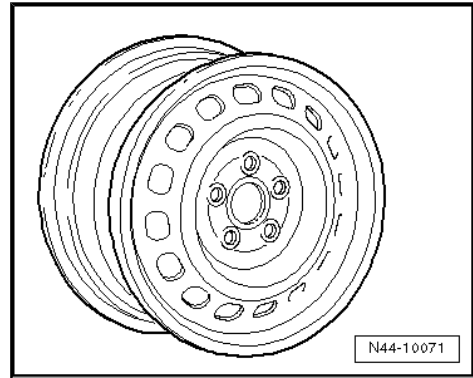

2K0 601 027 - Wheel and tyre combination ⇒ page 325

Size:	6 J x 15
Wheel offset in mm:	47
Wheel load in kg:	650

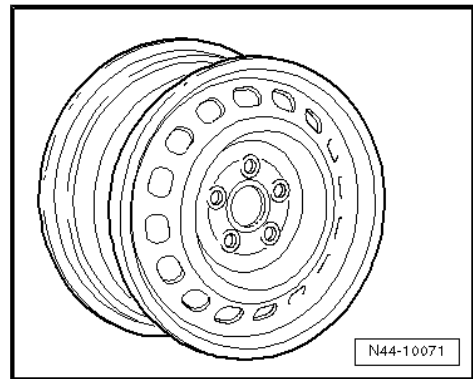

37.3.2 6¹/₂ J x 15




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 325 .


1K0 601,025 A - Wheel and tyre combination ⇒ page 326

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

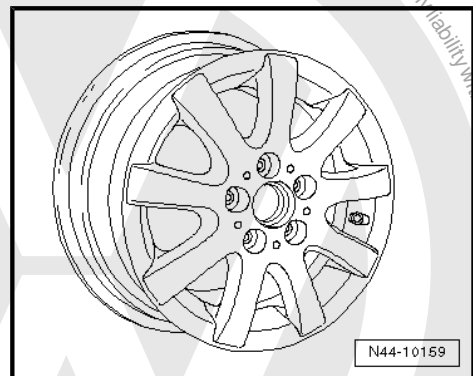

1K0 601 025 AK - Wheel and tyre combination ⇒ page 326


Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

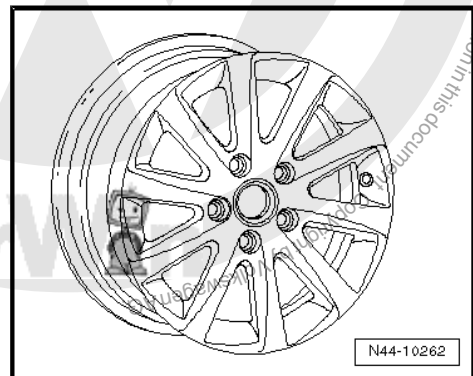




1K0 601 025 AQ - Wheel and tyre combination ⇒ page 326

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

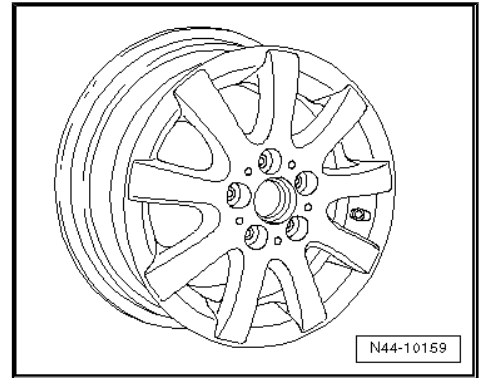

1K0 601 025 CA - Wheel and tyre combination ⇒ page 326

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

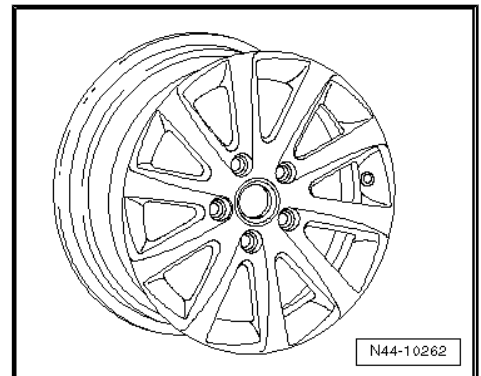

37.3.3 6 J x 16



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 325.


Winter wheels

8P0 601 027 - Wheel and tyre combination ⇒ page 326

Size:	6 J x 16
Wheel offset in mm:	50
Wheel load in kg:	600

Use the following wheel bolt caps for wheel bolts:


- ◆ 1K0.601.173 (4 per wheel)
- ◆ 1K0.601.173.A (1 per wheel)

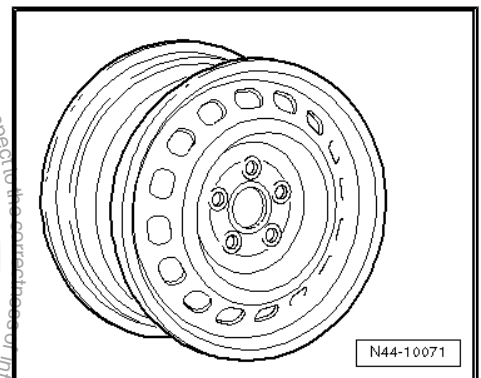



1K0 601 025 Q - Wheel and tyre combination ⇒ page 326

Size:	6 J x 16 EH2 ⇒ page 57
Wheel offset in mm:	50
Wheel load in kg:	615

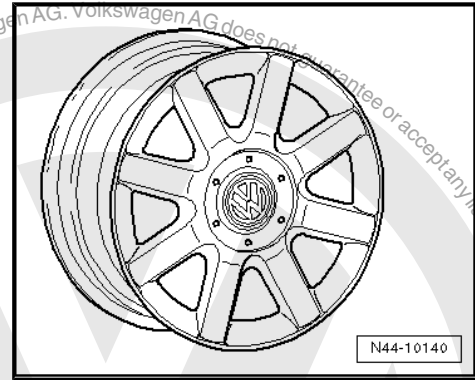

37.3.4 6¹/₂ J x 16




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 325 .


1K0 601 027 A - Wheel and tyre combination ⇒ page 326

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

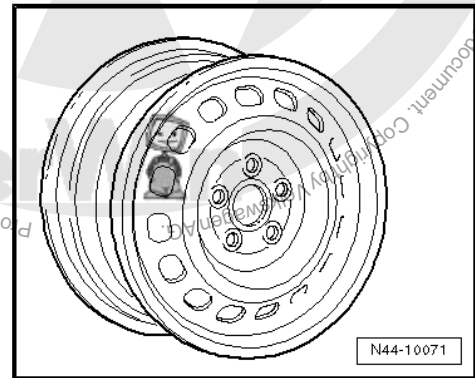


1K0 601 027 J - Wheel and tyre combination ⇒ page 326

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

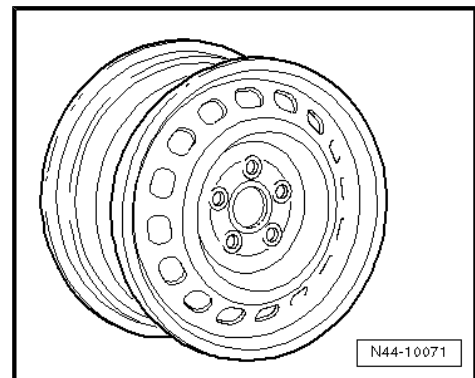

1K0 601 025 AJ - Wheel and tyre combination ⇒ page 326


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

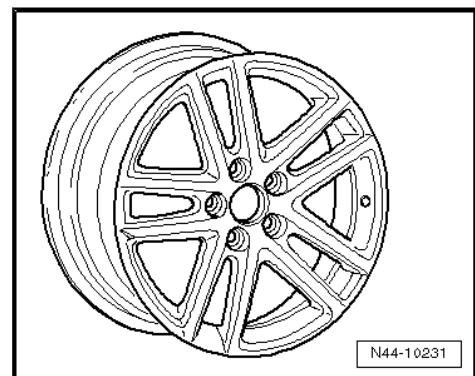




1K0 601 025 BC - Wheel and tyre combination ⇒ [page 326](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

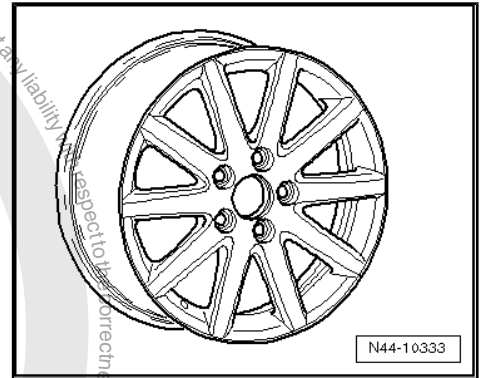

1K0 601 025 BM - Wheel and tyre combination ⇒ [page 326](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

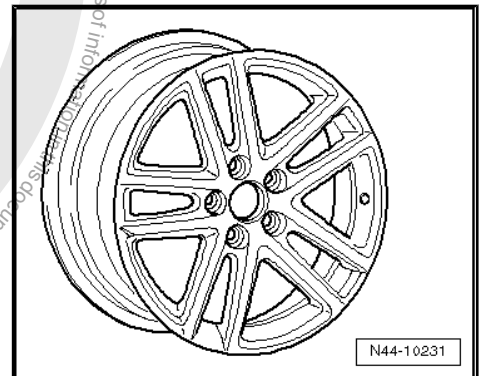

1K0 601 025 BR - Wheel and tyre combination ⇒ [page 326](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615



1K0 601 025 BS - Wheel and tyre combination ⇒ [page 326](#)


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615






1K0 601 025 CB - Wheel and tyre combination ⇒ page 326

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

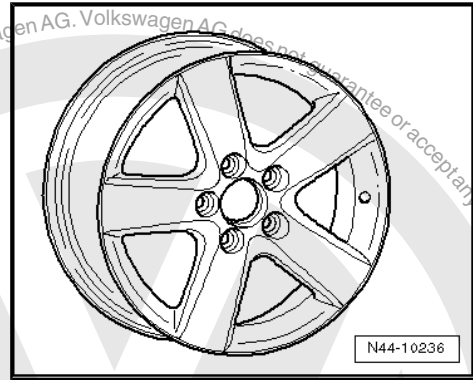


1K0 601 025 CG - Wheel and tyre combination ⇒ page 326

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

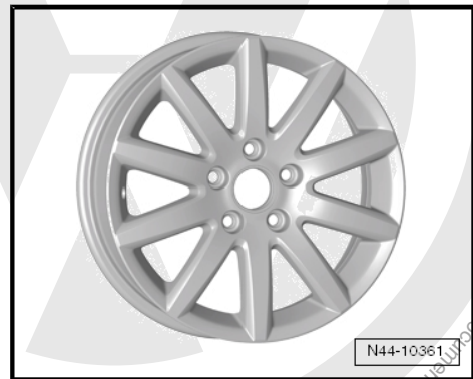


1T0 601 025 C - Wheel and tyre combination ⇒ page 326

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

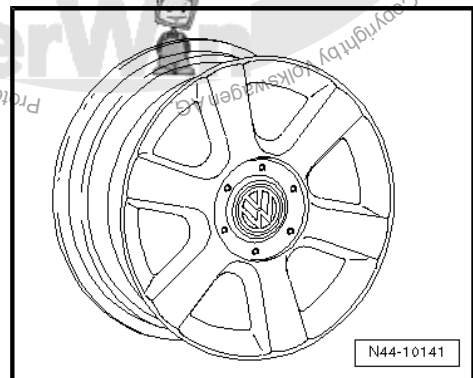

1K0 601 025 F - Wheel and tyre combination ⇒ page 326


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

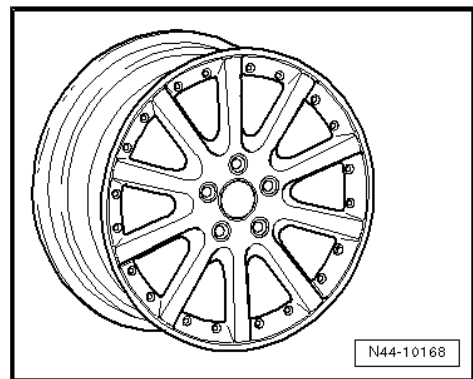




1K0 601 025 P - Wheel and tyre combination ⇒ page 326

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

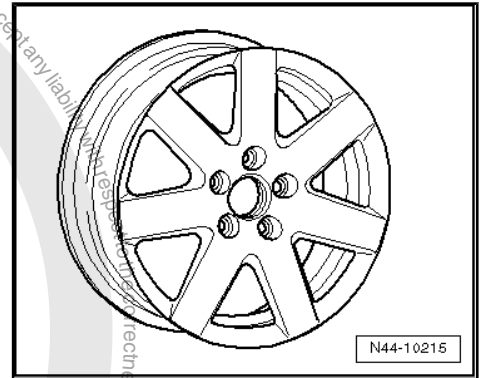


1K0 601 025 R - Wheel and tyre combination ⇒ page 326

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

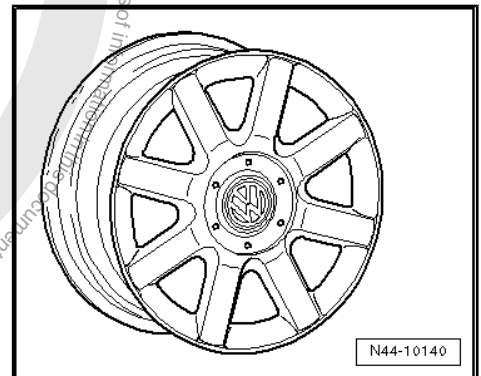


1T0 601 025 G, 1T0 601 025 K - Wheel and tyre combination ⇒ page 326

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

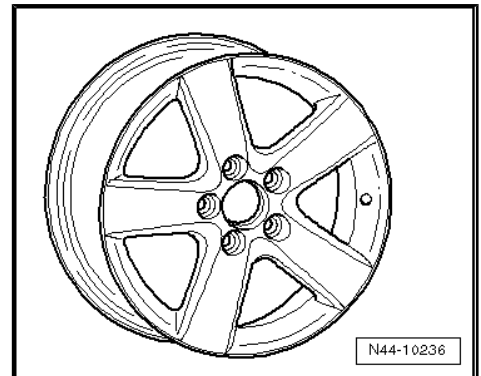

1T0 601 025 M - Wheel and tyre combination ⇒ page 326

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

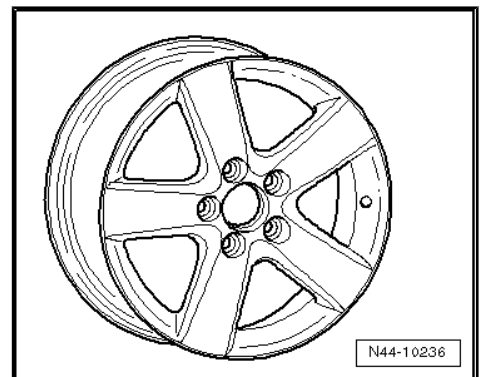



1T0 601 025 R - Wheel and tyre combination ⇒ [page 326](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615



37.3.5 7 J x 17




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 325](#).


1K0 601 025 B - Wheel and tyre combination ⇒ [page 326](#)

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

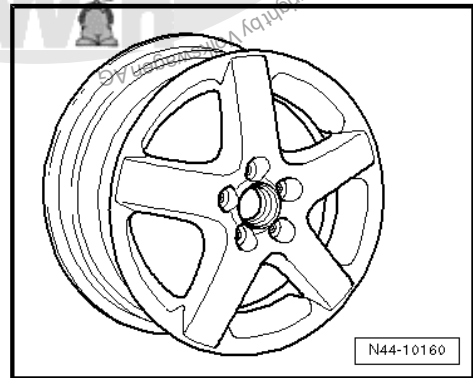


1K0 601,025 C - Wheel and tyre combination ⇒ [page 326](#)

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

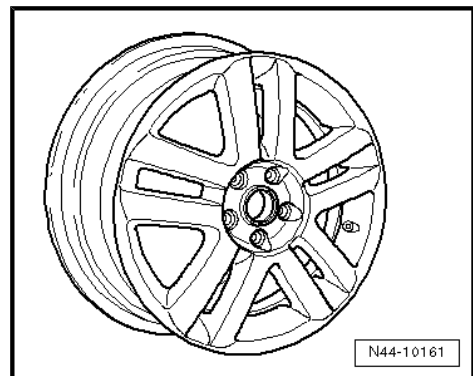

1K0 601 025 J - Wheel and tyre combination ⇒ [page 326](#)


Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

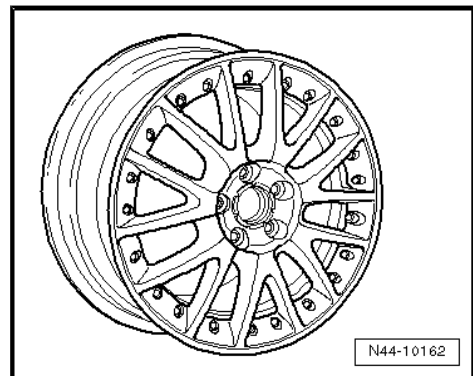




1K0 601 025 K - Wheel and tyre combination ⇒ page 326

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

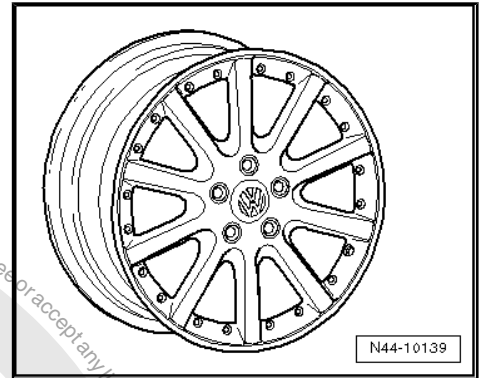


1K0 601 025 M - Wheel and tyre combination ⇒ page 326

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

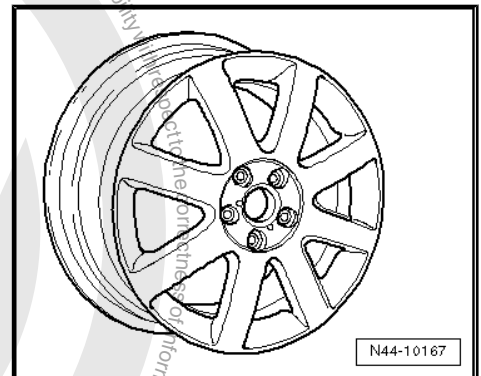


1K0 601 025 T - Wheel and tyre combination ⇒ page 326

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

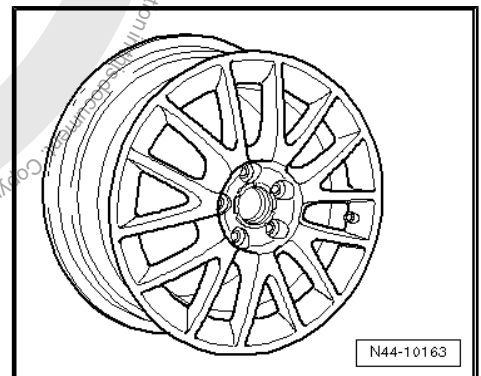

1K0 601 025 AF - Wheel and tyre combination ⇒ page 326


Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	630

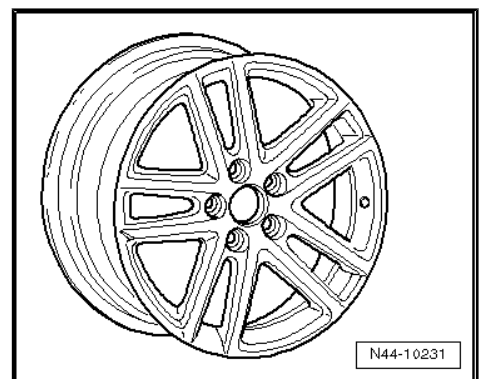




1K0 601 025 AE - Wheel and tyre combination ⇒ page 326

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	630

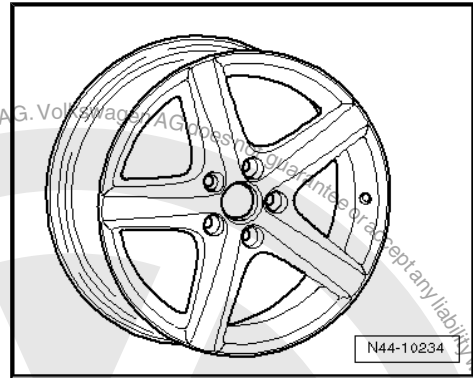

1K0 601 025 AN - Wheel and tyre combination ⇒ page 326

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	615

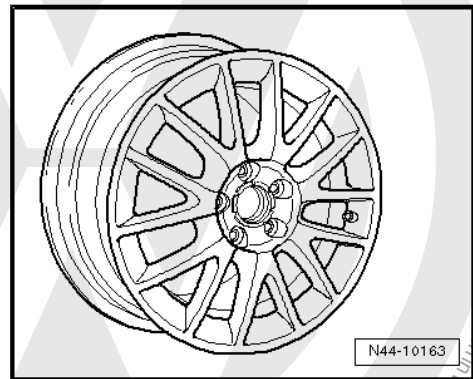

37.3.6 7 1/2 J x 18



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 325.



Caution


7 1/2 J x 18 wheels can only be fitted under the following conditions:

- *Additional wheel housing extensions (FLAPS) ⇒ page 4 have to be fitted on the rear axle ⇒ Electronic replacement parts catalogue „ETKA“.*

1K0 601 025 AD - Wheel and tyre combination ⇒ page 326

Only for vehicles with sports running gear and rear axle camber of -1°45'

Size:	7 1/2 J x 18
Wheel offset in mm:	51
Wheel load in kg:	630

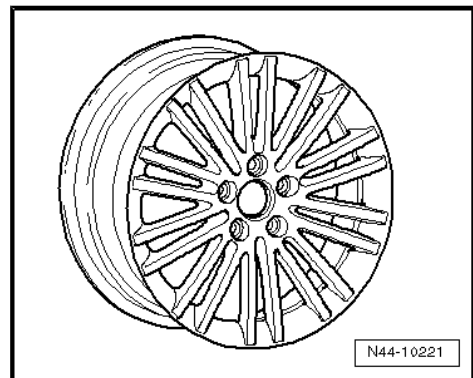




1K0 601 025 AG - Wheel and tyre combination ⇒ [page 326](#)

Only for vehicles with sports running gear and rear axle camber of -1°45'


Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	630

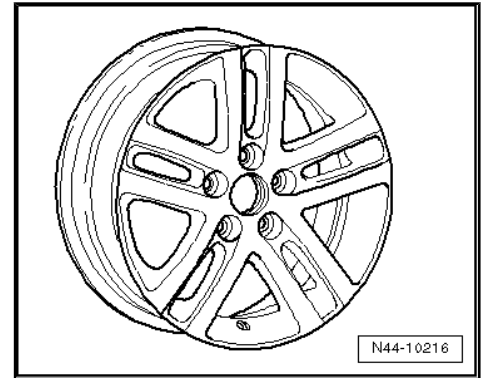

1K0 601 025 AH - Wheel and tyre combination ⇒ [page 326](#)

Only for vehicles with sports running gear and rear axle camber of -1°45'


Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

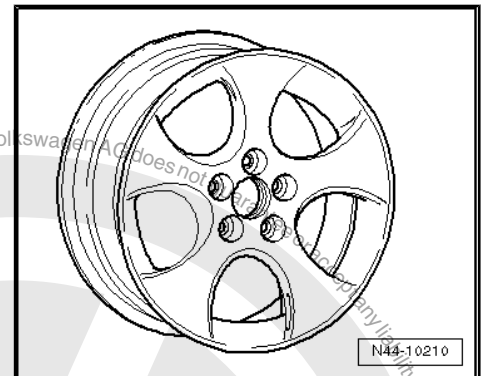

1K0 601 025 AM - Wheel and tyre combination ⇒ [page 326](#)

Only for vehicles with sports running gear and rear axle camber of -1°45'


Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

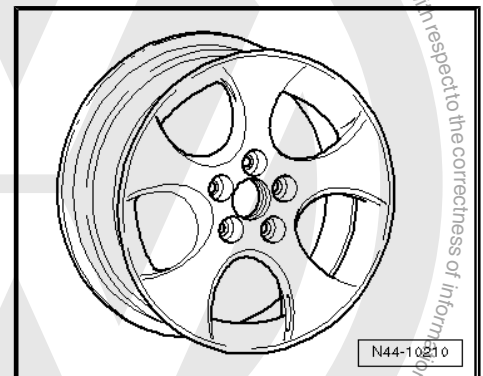

1K0 601 025 AT, 1K0 601 025 CC - Wheel and tyre combination ⇒ [page 326](#)

Only for vehicles with sports running gear and rear axle camber of -1°45'

Size:	7 ¹ / ₂ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

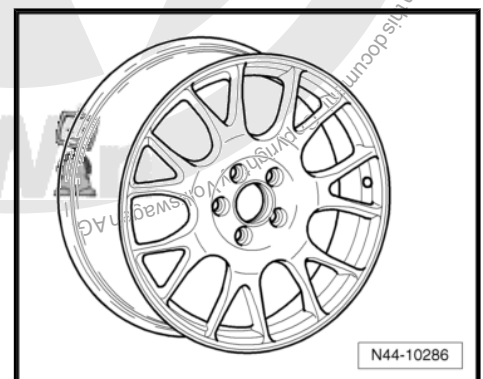




1K0 601 025 BA - Wheel and tyre combination ⇒ [page 326](#)

Only for vehicles with sports running gear and rear axle camber of $-1^{\circ}45'$


Size:	7 $\frac{1}{2}$ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

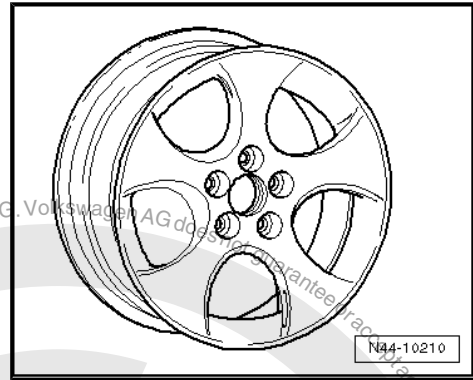

1K0 601 025 BE - Wheel and tyre combination ⇒ [page 326](#)

Only for vehicles with sports running gear and rear axle camber of $-1^{\circ}45'$


Size:	7 $\frac{1}{2}$ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

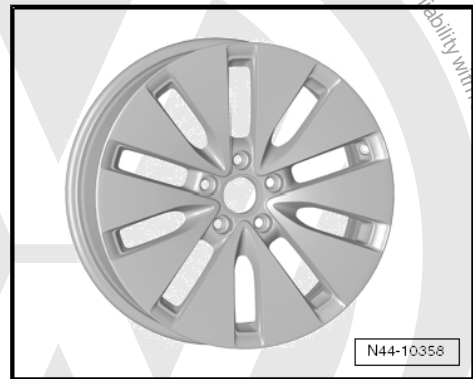

1K0 601 025 BL - Wheel and tyre combination ⇒ [page 326](#)

Only for vehicles with sports running gear and rear axle camber of $-1^{\circ}45'$

Size:	7 $\frac{1}{2}$ J x 18
Wheel offset in mm:	51
Wheel load in kg:	615

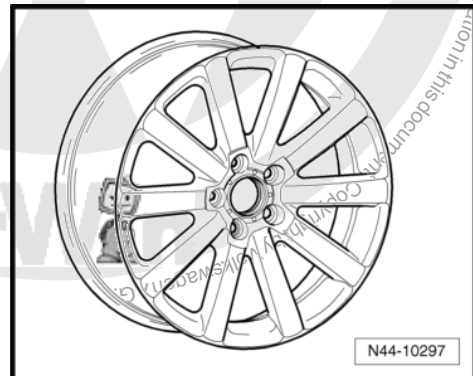



38 Golf Variant BlueMotion model year 2008 to model year 2010

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of only genuine Volkswagen spare parts. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

38.1 Golf Variant BlueMotion, type 1KM model year 2008 to model year 2010

Attachment to parts certificate 3878/08

The parts certificate can be found on the Volkswagen ServiceNet under Accessories/Tyres, Wheels and Tyres, Wheels and Tyres Guide.

Type approval number: e1*2001/116*0328*11 to e1*2001/116*0328*14

Overview

Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
1.9l 77 kW TDI diesel engine	Standard tyres	195/65 R 15 91T	6 J x 15 ⇒ page 344	47	Yes	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
	Modification	195/65 R 15 91H/V	6 J x 15 ⇒ page 344	47	Yes	Tyre makes recommended by Volkswagen: ♦ Summer tyres ⇒ page 475 ♦ Winter tyres ⇒ page 499
		195/65 R 15 91T/H/V	6 1/2 J x 15 ⇒ page 345	50	Yes	
		205/60 R 15 91T/H/V	6 J x 15 ⇒ page 344	47	Yes	
		205/55 R 16 91T/H/V/W	6 1/2 J x 16 ⇒ page 346	50	No	
	Winter tyres	195/65 R 15 91Q/T/H	6 J x 15 ⇒ page 344	47	Yes	

Tyre inflation pressures are located on a sticker on inside of fuel tank flap or in ⇒ Maintenance ; Booklet ; Check tyres: condition, profile, inflation pressure, depth of tread

38.2 Wheel allocation for Golf Variant Blue-Motion, type 1KM model year 2008 to model year 2010

Explanation of information on wheels ⇒ [page 57](#)

Torque specifications for wheel bolts ⇒ Running gear, axles, steering; Rep. gr. 44 ; Torque specifications for fitting wheels

Pitch circle diameter: 112 mm

Number of wheel bolt holes: 5

38.2.1 6 J x 15




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 343](#) .

1K0 601 027 C, 1K0 601 027 H - Wheel and tyre combination
⇒ [page 343](#)


Size:	6 J x 15
Wheel offset in mm:	47
Wheel load in kg:	615

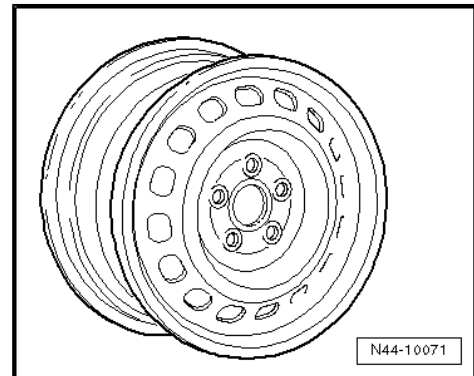




1K0 601,027 T - Wheel and tyre combination ⇒ page 343

Size:	6 J x 15
Wheel offset in mm:	47
Wheel load in kg:	615

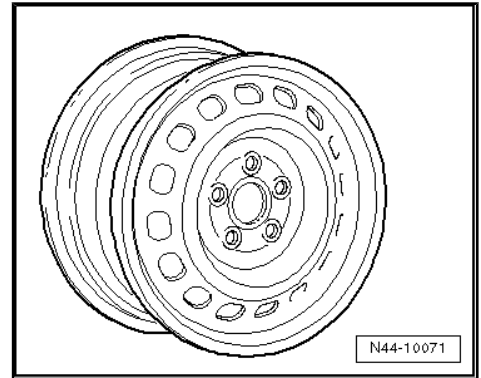


2K0 601 027 - Wheel and tyre combination ⇒ page 343

Size:	6 J x 15
Wheel offset in mm:	47
Wheel load in kg:	650

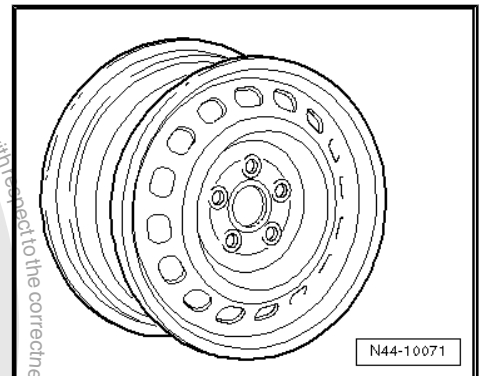


38.2.2 6¹/₂ J x 15

 **Caution**
Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 343 .


1K0 601,025 A - Wheel and tyre combination ⇒ page 344

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

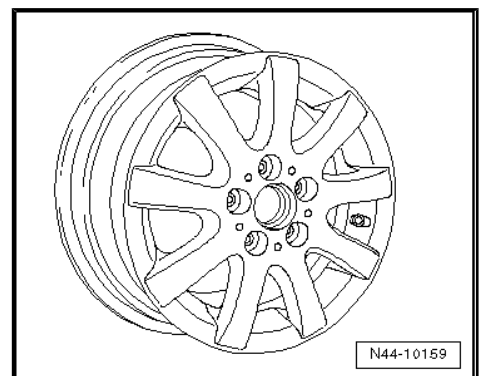

1K0 601 025 AK - Wheel and tyre combination ⇒ page 344


Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

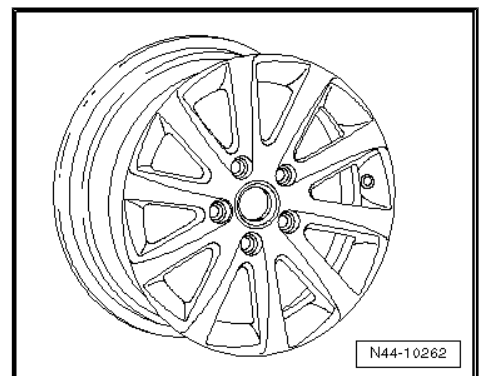




1K0 601 025 AQ - Wheel and tyre combination ⇒ page 344

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

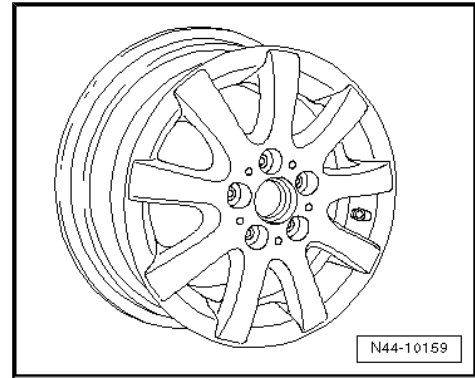

1K0 601 025 CA - Wheel and tyre combination ⇒ page 344

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	50
Wheel load in kg:	600

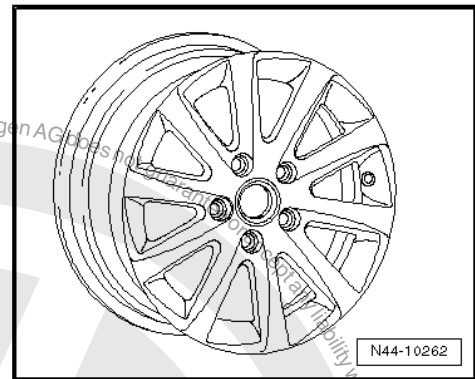


38.2.3 6¹/₂ J x 16

	Caution
<i>Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 343 .</i>	


1K0 601 027 A - Wheel and tyre combination ⇒ page 344

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

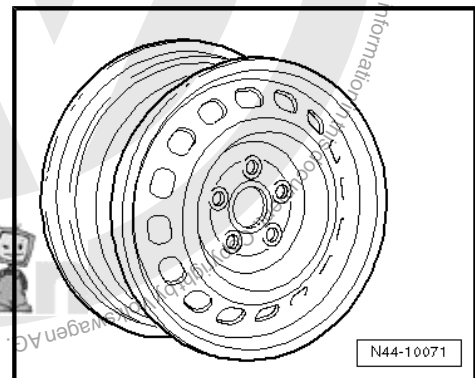

1K0 601 027 J - Wheel and tyre combination ⇒ page 344


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

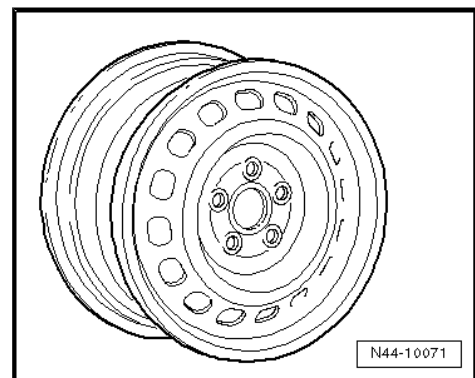




1K0 601 025 AJ - Wheel and tyre combination ⇒ page 344

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

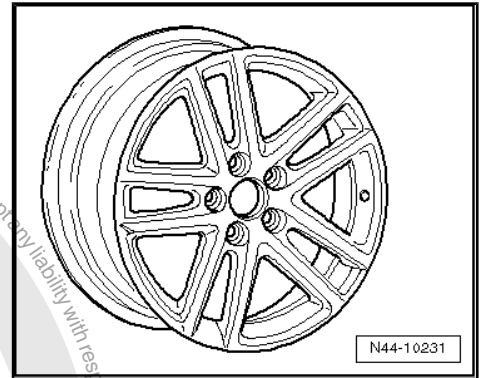


1K0 601 025 BC - Wheel and tyre combination ⇒ page 344

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

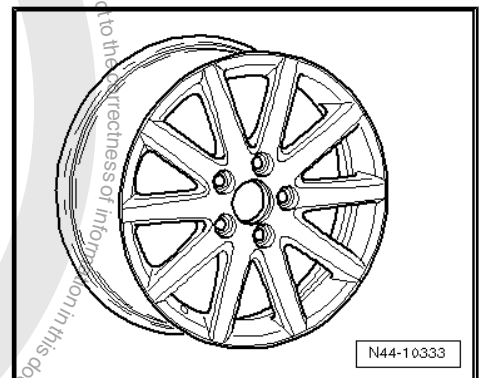

1K0 601 025 BM - Wheel and tyre combination ⇒ page 344

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

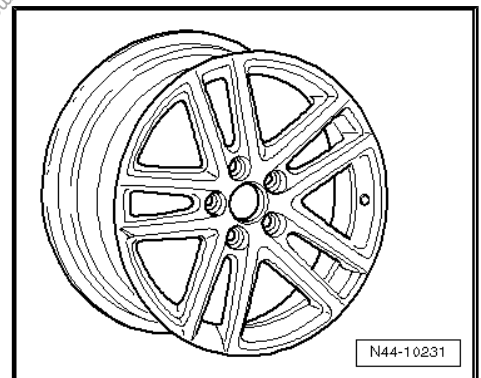

1K0 601 025 BR - Wheel and tyre combination ⇒ page 344


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615






1K0 601 025 BS - Wheel and tyre combination ⇒ [page 344](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

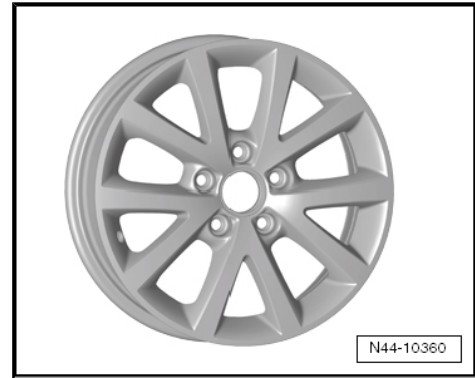


1K0 601 025 CB - Wheel and tyre combination ⇒ [page 344](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

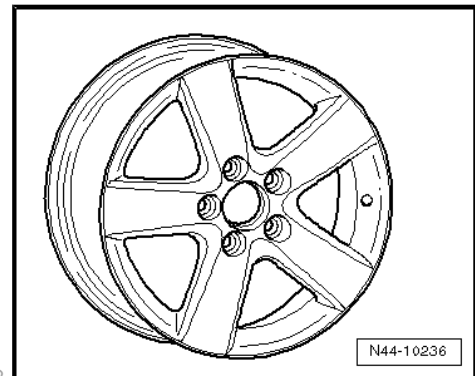


1K0 601 025 CG - Wheel and tyre combination ⇒ [page 344](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

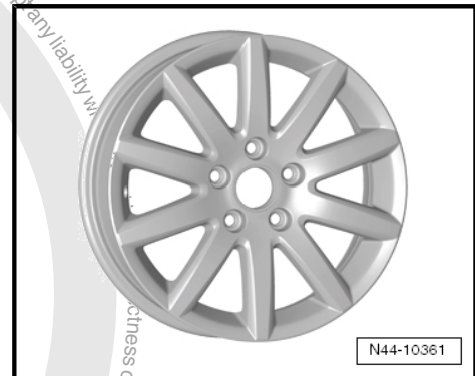

1T0 601 025 C - Wheel and tyre combination ⇒ [page 344](#)


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

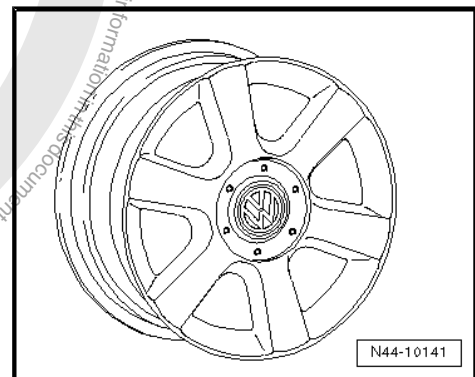




1K0 601 025 F - Wheel and tyre combination ⇒ page 344

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

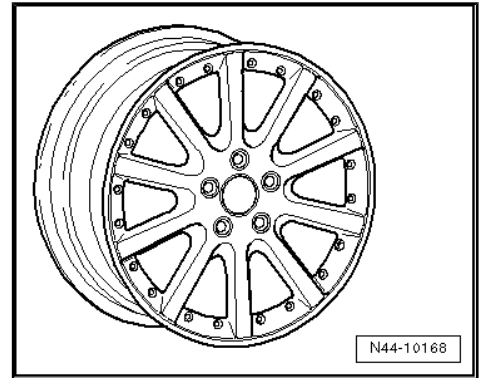


1K0 601 025 P - Wheel and tyre combination ⇒ page 344

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

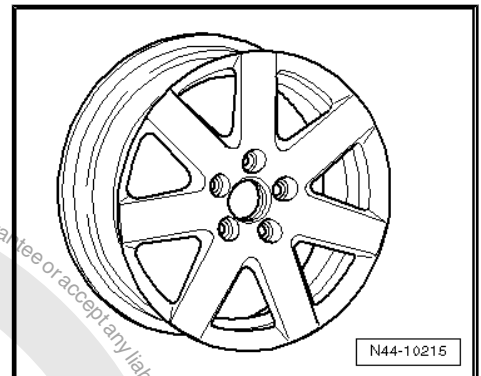


1K0 601 025 R - Wheel and tyre combination ⇒ page 344

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

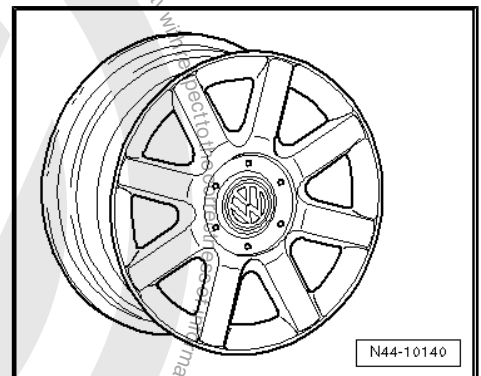

1T0 601 025 G - 1T0 601 025 K - Wheel and tyre combination ⇒ page 344


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

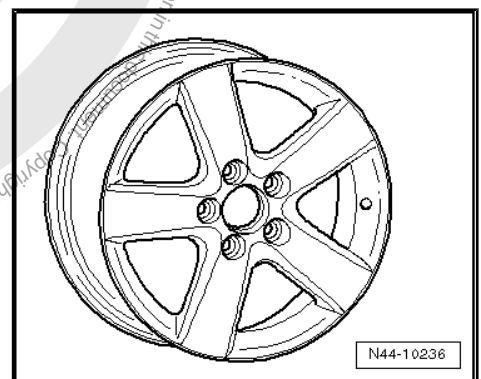




1T0 601 025 M - Wheel and tyre combination ⇒ [page 344](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

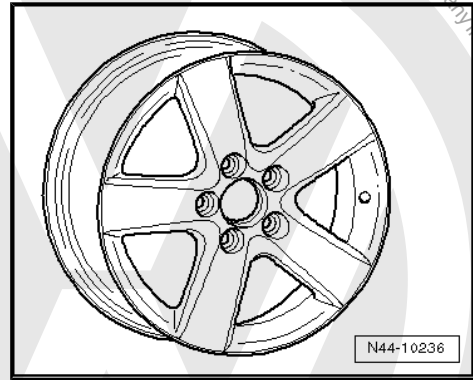

1T0 601 025 R - Wheel and tyre combination ⇒ [page 344](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	50
Wheel load in kg:	615

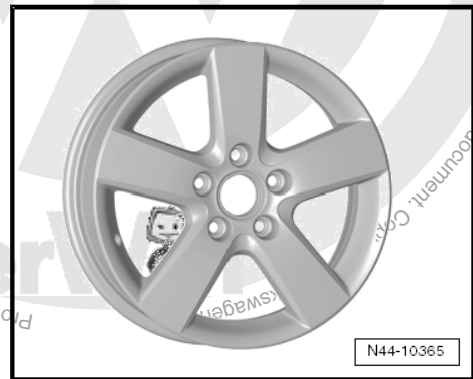



39 Golf cabriolet model year 1994 to model year 1997

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of genuine Volkswagen spare parts only. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to disc-type wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

39.1 Golf cabriolet type 1EX0 model year 1994 to model year 1997

Appendix 2 to Parts Certificate 1479/00

General type approval No.: G 407

Overview

Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
55 kW, 66 kW	Standard tyres	185/60 R 14 82T	6 J x 14 ⇒ page 353	43/4 5	Yes	205/45 R 16 83 H are only permissible if shock absorbers 1HM 513 031 B are installed on the rear axle and no equipment to lower vehicle is installed!
	Modification	185/60 R 14 82H	6 J x 14 ⇒ page 353	43/4 5	Yes	



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
		195/50 R 15 82H	6 J x 15 ⇒ page 354	45	Yes	Winter tyres 175/70 R 13 82Q are permitted only on vehicles to 12.94.
		205/45 R 16 83H	6 ¹ / ₂ J x 16 ⇒ page 354	45	No	
	Winter tyres	175/65 R 14 82Q	6 J x 14 ⇒ page 353	43/4 5	Yes	
74 kW, 81 kW, 85 kW	Standard tyres	185/60 R 14 82H	6 J x 14 ⇒ page 353	43/4 5	Yes	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17 Tyre makes recommended by Volkswagen: ◆ Summer tyres ⇒ page 465 ◆ All-season tyres ⇒ page 482 ◆ Winter tyres ⇒ page 493
	Modification	185/60 R 14 82T	6 J x 14 ⇒ page 353	43/4 5	Yes	
		195/50 R 15 82H	6 J x 15 ⇒ page 354	45	Yes	
		205/45 R 16 83H	6 ¹ / ₂ J x 16 ⇒ page 354	45	No	
	Winter tyres	175/65 R 14 82Q	6 J x 14 ⇒ page 353	43/4 5	Yes	

Tyre pressures can be found on the inside of the fuel tank flap or in ⇒ Maintenance ; Booklet 35 .

39.2 Wheel allocation Golf cabriolet, type 1EX0 from model year 1994 to model year 1997

Explanation of information on wheels ⇒ [page 57](#)

Torque settings for wheel bolts ⇒ Running gear; Rep. gr. 40 ;
Repairing front wheel suspension (basic running gear); Removing and installing wheel bearing, strut and drive shaft (basic running gear)

Pitch circle diameter 100 mm

Number of wheel bolt holes: 4




39.2.1 6 J x 14

Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 351](#) .


1H0 601 025 P - Wheel and tyre combination ⇒ [page 351](#)

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	460

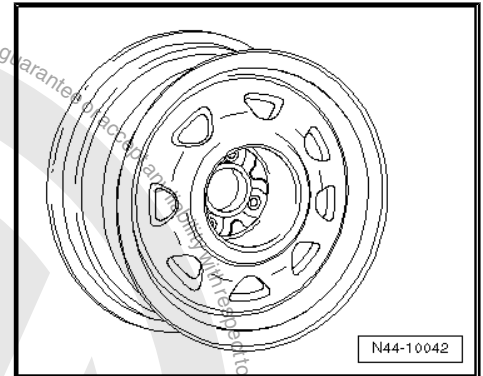


1HM 601 025 - Wheel and tyre combination ⇒ [page 351](#)

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	460

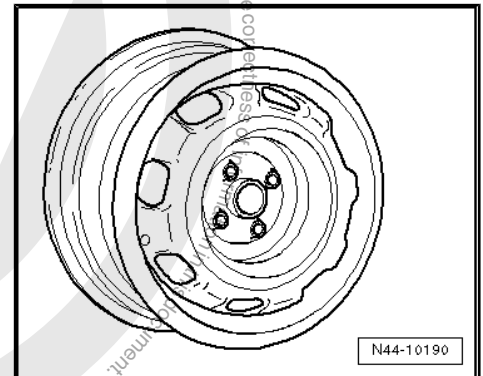


1H0 601 025 B - Wheel and tyre combination ⇒ [page 351](#)

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	460

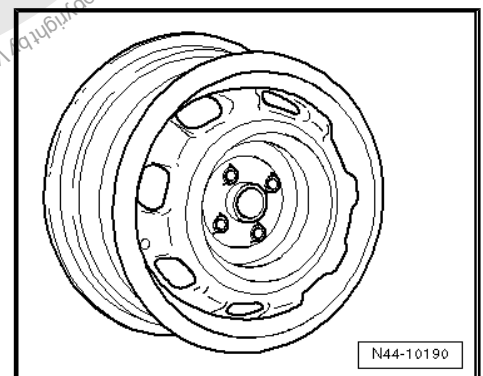

1H0 601 027 A - Wheel and tyre combination ⇒ [page 351](#)


Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	500

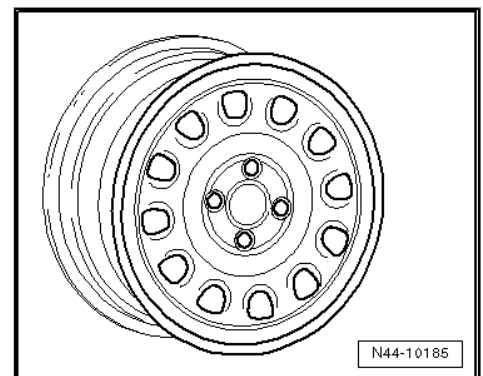



1H0 601 025 R - Wheel and tyre combination ⇒ page 351

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	500

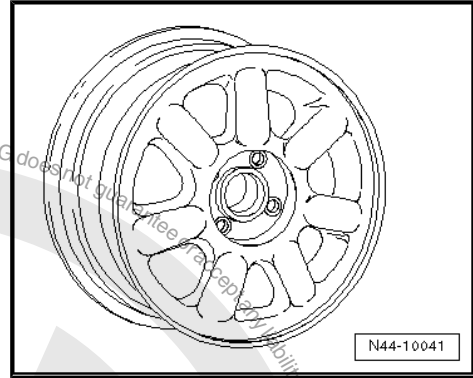

39.2.2 6 J x 15




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 351 .


1H0 601 025 AD - Wheel and tyre combination ⇒ page 352

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	460

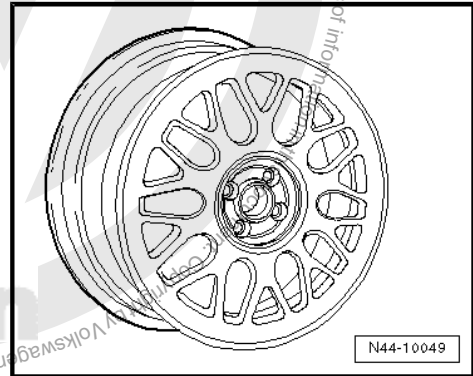

1H0 601 025 AE - Wheel and tyre combination ⇒ page 352

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	480

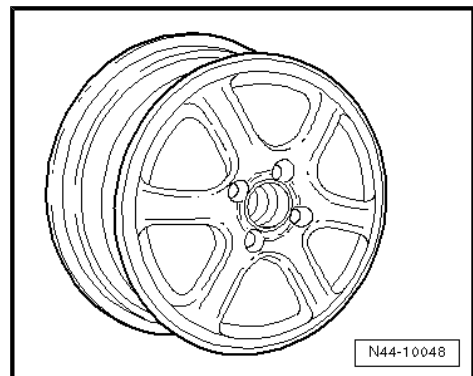

39.2.3 6 1/2 J x 16




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 351 .



1H0 601 025 AJ - Wheel and tyre combination ⇒ [page 352](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	45
Wheel load in kg:	480

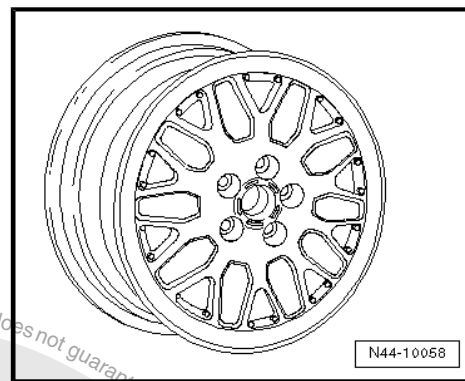



40 Golf cabriolet model year 1998 to model year 2002

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of genuine Volkswagen spare parts only. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to disc-type wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

40.1 Golf cabriolet; type 1E from model year 1998 to model year 2002

Appendix 2 to Parts Certificate 1486/03

Type Approval No. cabriolet: e1*96/79*0070*00 to e1*96/79*0070*04

Type Approval No. Cabriolet: e1*98/14*0070*05 to e1*98/14*0070*10

Overview

Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
55 kW petrol engine; 66 kW TDI	Standard tyres	185/60 R 14 82T	6 J x 14 ⇒ page 357	43/4 5	Yes	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
	Modification	195/50 R 15 82H	6 J x 15 ⇒ page 359	43/4 5	Yes	Tyre makes recommended by Volkswagen:
		205/45 R 16 83H	6 ¹ / ₂ J x 16 ⇒ page 361	45	No	<ul style="list-style-type: none"> ◆ Summer tyres ⇒ page 475 ◆ All-season tyres ⇒ page 485 ◆ Winter tyres ⇒ page 500
	Winter tyres	175/65 R 14 82Q	6 J x 14 ⇒ page 357	43/4 5	Yes	205/45 R 16 83H are permitted only if:
74 kW, 85 kW petrol engines 81 kW TDI	Standard tyres	185/60 R 14 82H	6 J x 14 ⇒ page 357	43/4 5	Yes	<ul style="list-style-type: none"> ◆ shock absorbers 1HM 513 031 B are installed on the rear axle. ◆ No equipment for lowering vehicle is installed.
	Modification	195/50 R 15 82H	6 J x 15 ⇒ page 359	43/4 5	Yes	Winter tyres 175/70 R13 82 Q are only possible on vehicles produced up to 12.94.
		205/45 R 16 83H	6 ¹ / ₂ J x 16 ⇒ page 361	45	No	
	Winter tyres	175/65 R 14 82Q	6 J x 14 ⇒ page 357	43/4 5	Yes	

Tyre pressures can be found on the inside of the fuel tank flap or in ⇒ Maintenance ; Booklet 35 .

40.2 Wheel allocation Golf cabriolet; type 1E from model year 1998 to model year 2002

Explanation of information on wheels ⇒ [page 57](#)

Tightening torques for wheel bolts ⇒ Running gear; Rep. gr. 40

Pitch circle diameter 100 mm

Number of wheel bolt holes: 4

40.2.1 6 J x 14



Caution


Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 356](#) .



For vehicles with maximum permitted axle load of 920 kg


1H0 601 025 P - Wheel and tyre combination ⇒ [page 356](#)

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	460

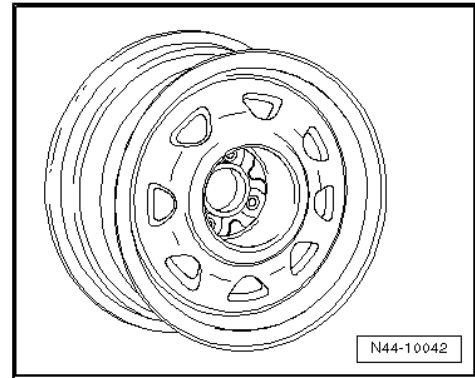


1HM 601 025 - Wheel and tyre combination ⇒ [page 356](#)

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	460

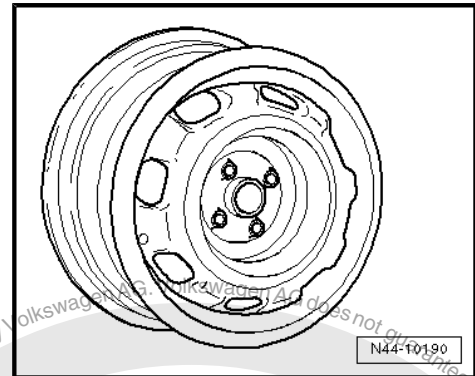

1H0 601 025 B - Wheel and tyre combination ⇒ [page 356](#)


Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	460

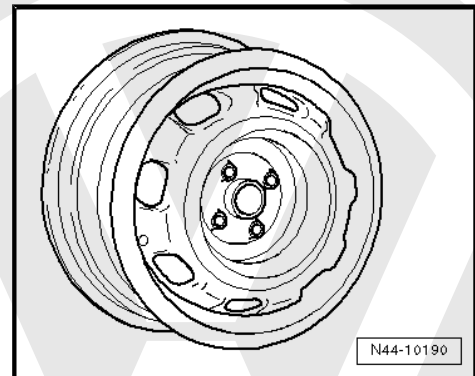

All vehicles

1H0 601 027 A - Wheel and tyre combination ⇒ [page 356](#)


Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	500

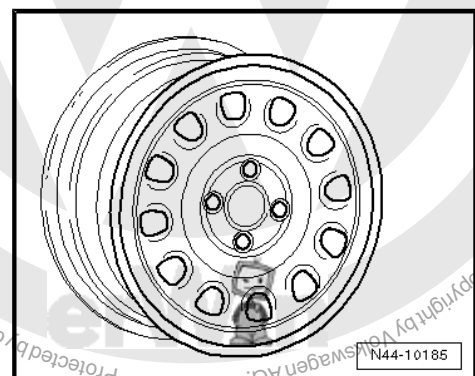




1H0 601 027 - Wheel and tyre combination ⇒ page 356

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	500

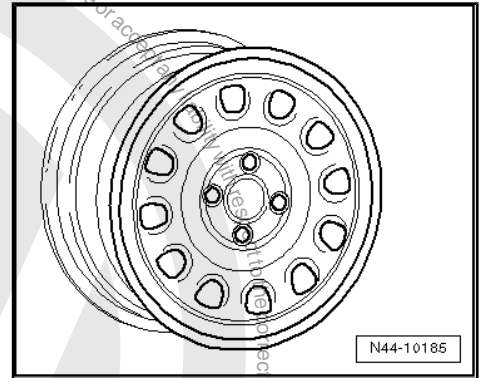


1H0 601 025 R - Wheel and tyre combination ⇒ page 356

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	500

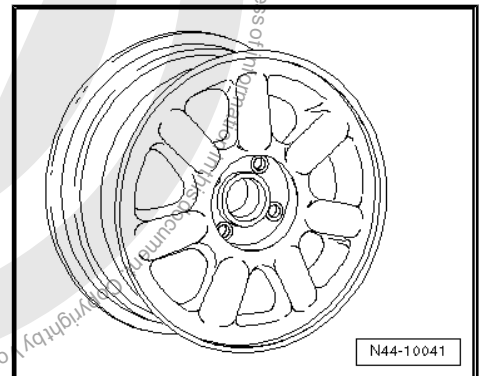

6X0 601 025 D - Wheel and tyre combination ⇒ page 356

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	475

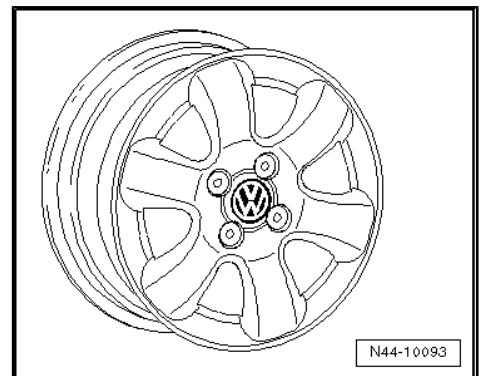

40.2.2 6 J x 15



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 356 .




For vehicles with maximum permitted axle load of 920 kg

1H0 601 025 AD - Wheel and tyre combination ⇒ [page 357](#)


Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	460

All vehicles

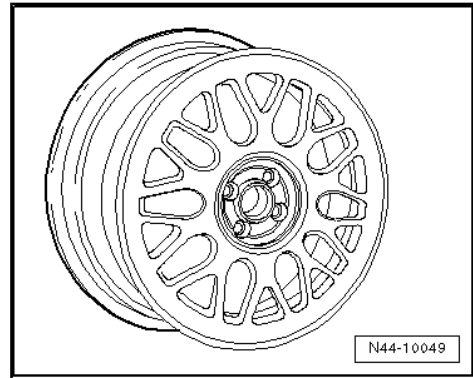


1H0 601 025 AE - Wheel and tyre combination ⇒ [page 357](#)

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	480

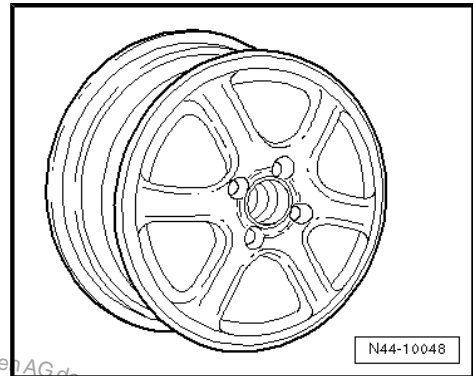


6X0 601 025 C - Wheel and tyre combination ⇒ [page 357](#)

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	475

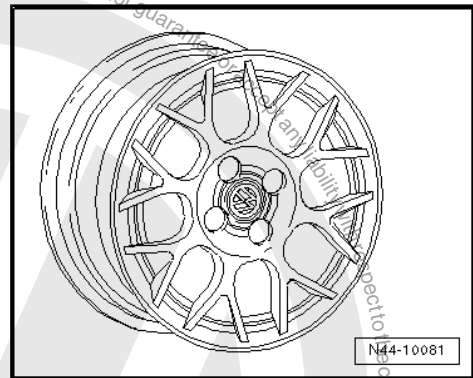

6X0 601 025 E - Wheel and tyre combination ⇒ [page 357](#)

Size:	6 J x 15
Wheel offset in mm:	43
Wheel load in kg:	475

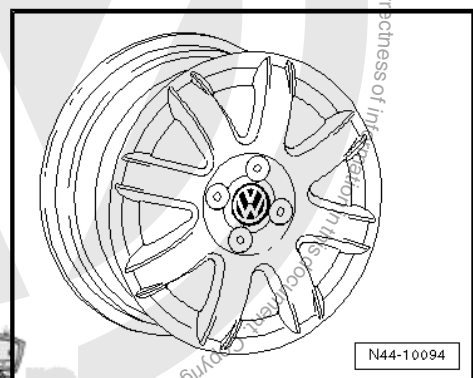



40.2.3 6¹/₂ J x 16




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 356](#) .

1H0 601 025 AJ - Wheel and tyre combination ⇒ [page 357](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	45
Wheel load in kg:	480

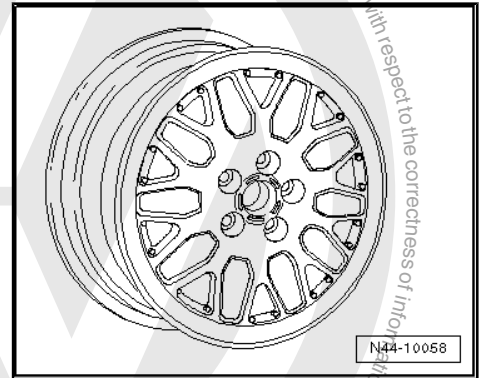



41 Vento from model year 1992 to model year 1998

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of genuine Volkswagen spare parts only. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to disc-type wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

41.1 Vento; type 1HX0, 1H

Appendix 2 to Parts Certificate 1479/00

Vento, type 1HX0 from model year 1992 to model year 1997

General type approval No.: F 804

Vento, type 1H model year 1998

Type Approval No.: e1*96/79*0068*01 to e1*96/79*0068*03

Overview

Model engine output	Tyres	Tyre size	Wheel	Offset in mm	Snow chains	Remarks
44 kW, 55 kW petrol engine;	Standard tyres	185/60 R 14 82T/H	6 J x 14 ⇒ page 365	45	Yes	
66 kW CL, GL petrol engine manual gearbox;	Modification	175/70 R 13 82S	5 ¹ / ₂ J x 13 ⇒ page 364	38	Yes	



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
47 kW, 55 kW diesel engine manual gear-box 55 kW and 66 kW with automatic gear-box to 12.94		175/65 R 14 82S	6 J x 14 ⇒ page 365	43/45	Yes	66 kW CL, GL vehicles require T tyres
		185/60 R 14 82T	6 J x 14 ⇒ page 365	43/45	Yes	
		195/50 R 15 82H	6 J x 15 ⇒ page 368	45	Yes	
	Winter tyres	175/70 R 13 82Q	5 ¹ / ₂ J x 13 ⇒ page 364	38	Yes	
55 kW and 66 kW with automatic gear-box to 01.95 66 kW GT; 66 kW TDI	Standard tyres	185/60 R 14 82H	6 J x 14 ⇒ page 365	43/45	Yes	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17 Tyre makes recommended by Volkswagen:
	Modification	185/60 R 14 82T	6 J x 14 ⇒ page 365	43/45	Yes	
		195/50 R 15 82H	6 J x 15 ⇒ page 368	45	Yes	
	Winter tyres	175/65 R 14 82Q	6 J x 14 ⇒ page 365	43/45	Yes	
44 kW, 47 kW, 55 kW with ABS from 05.96	Standard tyres	185/60 R 14 82H	6 J x 14 ⇒ page 365	43/45	Yes	◆ Summer tyres ⇒ page 463 ◆ All-season tyres ⇒ page 482 ◆ Winter tyres ⇒ page 492
	Modification	185/60 R 14 82T	6 J x 14 ⇒ page 365	43/45	Yes	
		195/50 R 15 82H	6 J x 15 ⇒ page 368	45	Yes	
	Winter tyres	175/65 R 14 82Q	6 J x 14 ⇒ page 365	43/45	Yes	
74 kW, 85 kW CL, GL, GT; 81 kW TDI	Standard tyres	185/60 R 14 82H	6 J x 14 ⇒ page 365	43/45	Yes	
	Modification	195/50 R 15 82H	6 J x 15 ⇒ page 368	45	Yes	
	Winter tyres	175/65 R 14 82Q	6 J x 14 ⇒ page 365	43/45	Yes	
85 kW GT	Standard tyres	195/50 R 15 82H	6 J x 15 ⇒ page 368	38	Yes	



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
	Modification	195/50 R 15 82H	6 1/2 J x 15 ⇒ page 370	43	Yes	
		205/50 R 15 86H	6 1/2 J x 15	43	Yes	
	Winter tyres	185/55 R 15 81T reinforced	6 J x 15 ⇒ page 369	38	Yes	Vehicles to 04.96
		185/55 R 15 81T reinforced	6 J x 15 ⇒ page 368	35	Yes	Vehicles from 05.96
128 kW VR6	Standard tyres	205/50 R 15 86V	6 1/2 J x 15 ⇒ page 370	43	Yes	
	Modification	No changes are permissible apart from the standard wheel and tyre combinations!				
	Winter tyres	185/55 R 15 81T reinforced	6 J x 15 ⇒ page 369	38	Yes	Vehicles to 12.94
		185/55 R 15 81T reinforced	6 J x 15 ⇒ page 370	35	Yes	Vehicles from 01.95

Tyre pressures can be found on the inside of the fuel tank flap or in ⇒ Maintenance ; Booklet 35 .

41.2 Wheel allocation for Vento; type 1HX0, 1H

Vento, type 1HX0 from model year 1992 to model year 1997

Vento, type 1H model year 1998

Explanation of information on wheels ⇒ [page 57](#)

Torque specifications for wheel bolts ⇒ Running gear; Rep. gr. 40 ; Repairing front suspension (basic running gear); Removing and installing wheel bearing, strut, drive shaft (basic suspension) or ⇒ Running gear; Rep. gr. 40 ; Repairing front suspension (plus running gear); Removing and installing wheel bearing, strut (plus running gear)

Pitch circle diameter: 100 mm

41.2.1 5 1/2 J x 13



Caution


Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 362](#) .



Vento to 55 kW CL, GL with manual gearbox (front-wheel drive)

191 601 025 D - Wheel and tyre combination ⇒ [page 362](#)


Size:	5 ¹ / ₂ J x 13
Wheel offset in mm:	38
Wheel load in kg:	410
Number of wheel bolt holes:	4

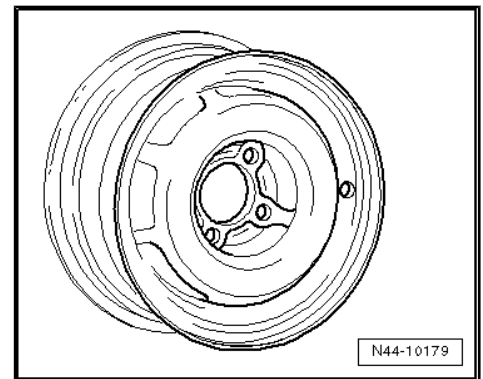

Vento to 66 kW CL, GL with petrol engine, Vento to 55 kW CL, GL with diesel engine, Vento GT


1H0 601 025 A - Wheel and tyre combination ⇒ [page 362](#)

Size:	5 ¹ / ₂ J x 13
Wheel offset in mm:	38
Wheel load in kg:	450
Number of wheel bolt holes:	4

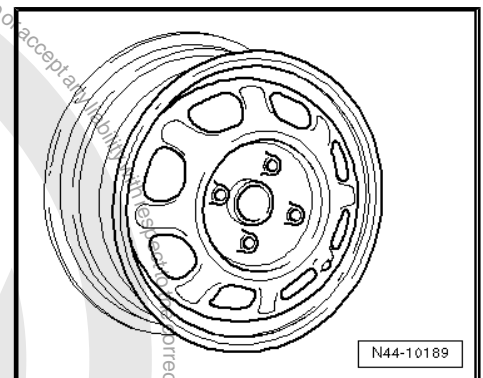

321 601 025 J/M - Wheel and tyre combination ⇒ [page 362](#)

Size:	5 ¹ / ₂ J x 13
Wheel offset in mm:	38
Wheel load in kg:	460
Number of wheel bolt holes:	4

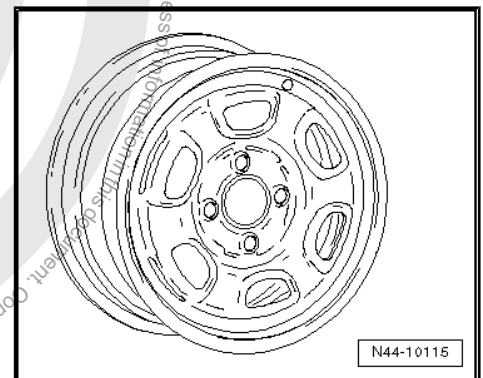

41.2.2 6 J x 14



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 362](#).



Vento to 85 kW CL, GL, Vento 66 kW GT, to 55 kW CL, GL diesel engine, Vento GTD, Vento 66 kW and 81 kW TDI


811 601 025 P - Wheel and tyre combination ⇒ [page 362](#)



Note


This rim is allowed only for vehicles with a maximum permitted axle load of 880 kg.

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	440
Number of wheel bolt holes:	4

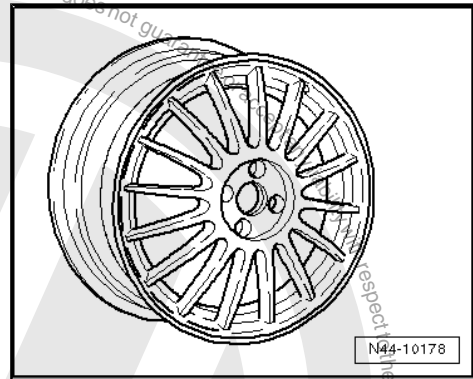


1H0 601 025 D - Wheel and tyre combination ⇒ [page 362](#)

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	450
Number of wheel bolt holes:	4

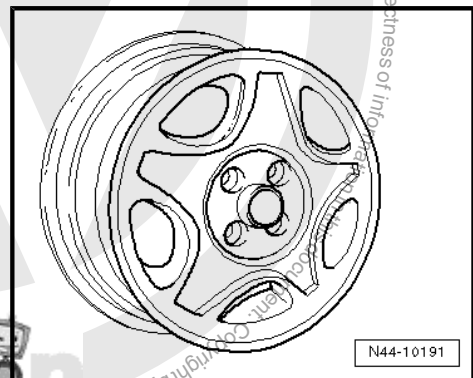


1H0 601 025 AE - Wheel and tyre combination ⇒ [page 362](#)

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	480
Number of wheel bolt holes:	4

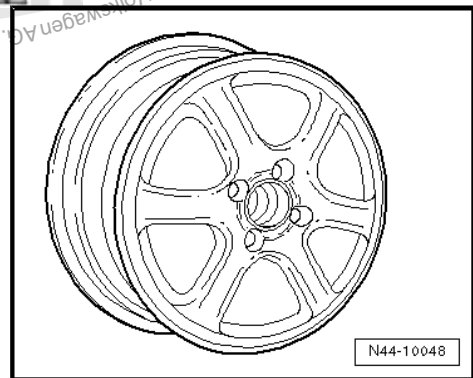

1H0 601 027 - Wheel and tyre combination ⇒ [page 362](#)


Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	500
Number of wheel bolt holes:	4

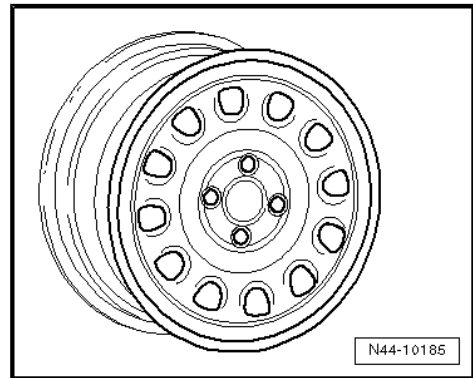




1H0 601 027 A - Wheel and tyre combination ⇒ page 363

Size:	6 J x 14
Wheel offset in mm:	43
Wheel load in kg:	500
Number of wheel bolt holes:	4

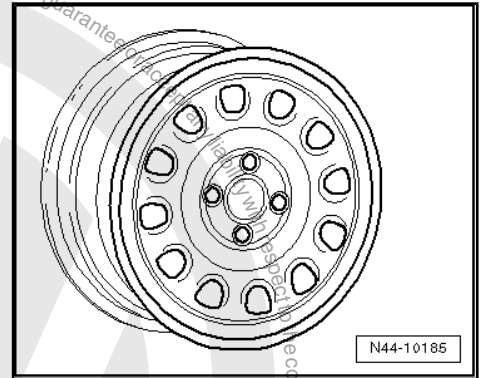


1H0 601 025 P - Wheel and tyre combination ⇒ page 362

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	460
Number of wheel bolt holes:	4

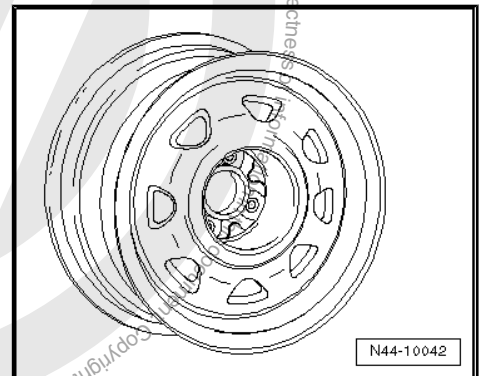


1HM 601 025 - Wheel and tyre combination ⇒ page 362

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	460
Number of wheel bolt holes:	4

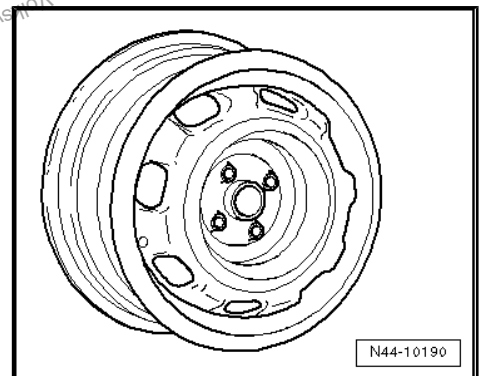

1H0 601 025 B - Wheel and tyre combination ⇒ page 362


Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	460
Number of wheel bolt holes:	4

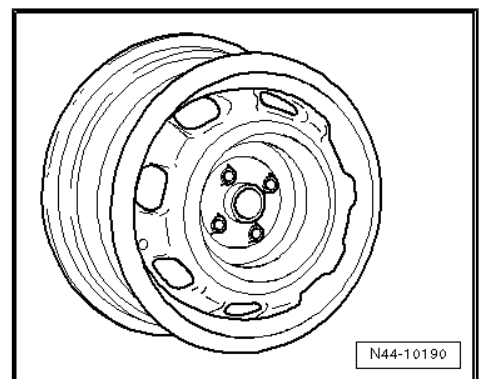



1H0 601 025 R - Wheel and tyre combination ⇒ [page 362](#)

Size:	6 J x 14
Wheel offset in mm:	45
Wheel load in kg:	500
Number of wheel bolt holes:	4

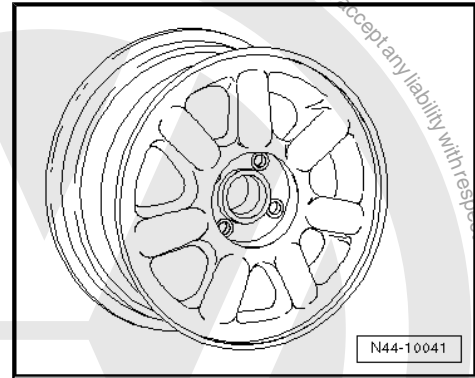

41.2.3 6 J x 15




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 362](#).

Vento to 85 kW CL, GL, Vento 66 kW GT, to 55 kW CL, GL diesel engine, Vento GTD, Vento 66 kW and 81 kW TDI


1H0 601 025 E - Wheel and tyre combination ⇒ [page 363](#)

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	450
Number of wheel bolt holes:	4

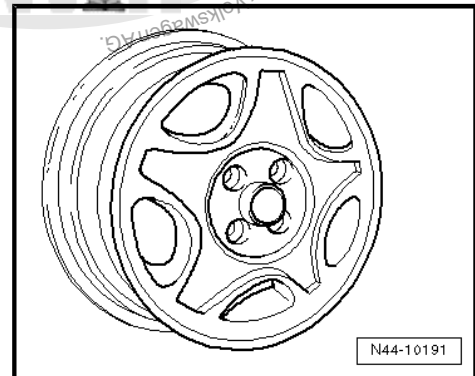

1H0 601 025 L - Wheel and tyre combination ⇒ [page 363](#)


Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	450
Number of wheel bolt holes:	4

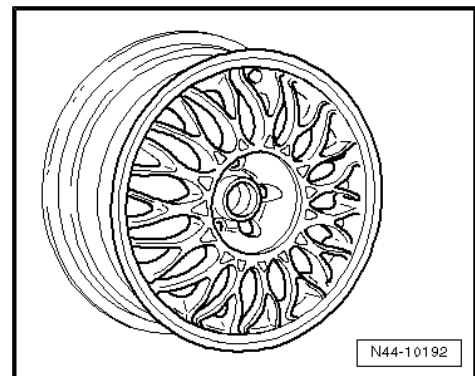




1H0 601 025 Q - Wheel and tyre combination ⇒ page 363

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	450
Number of wheel bolt holes:	4

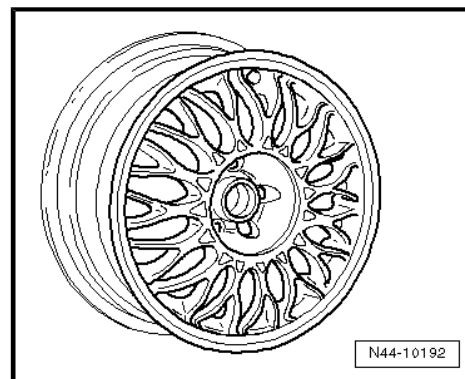

1H0 601 025 AD - Wheel and tyre combination ⇒ page 363


Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	460
Number of wheel bolt holes:	4

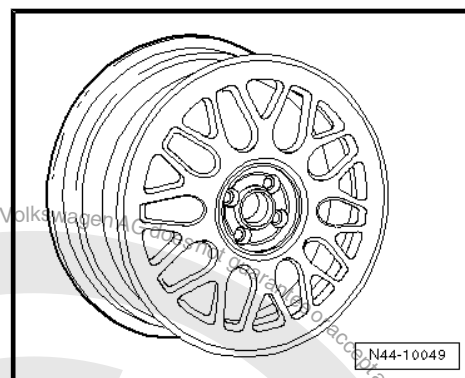

Vento VR6 to 12.94

1H0 601 025 K - Wheel and tyre combination ⇒ page 364


Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	490
Number of wheel bolt holes:	5

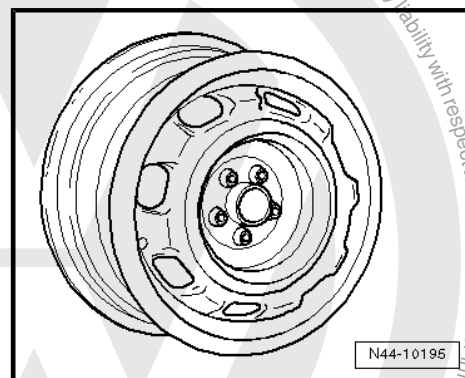

Vento 85 kW GT to 04.96

1H0 601 025 J - Wheel and tyre combination ⇒ page 364

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	530
Number of wheel bolt holes:	5

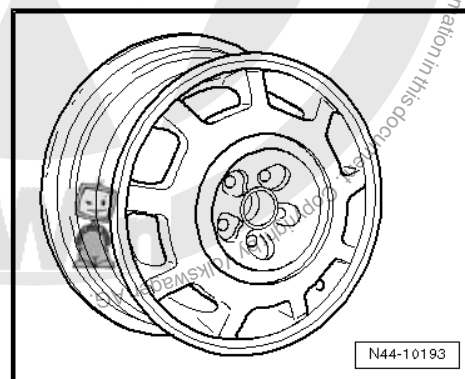




1H0 601 025 K - Wheel and tyre combination ⇒ page 364


Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	490
Number of wheel bolt holes:	5

Vento 85 kW GT, Vento VR6

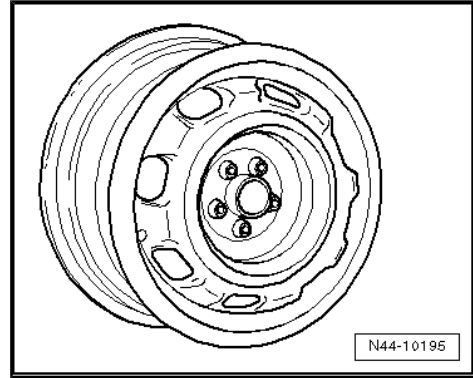

3A0 601 027 - Wheel and tyre combination ⇒ page 364

Size:	6 J x 15
Wheel offset in mm:	35
Wheel load in kg:	530
Number of wheel bolt holes:	5

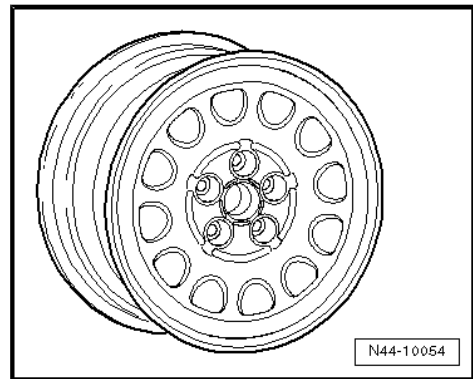

41.2.4 6 1/2 J x 15



Caution


Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 362 .

Vento VR6 to 12.94

1H0 601 025 F - Wheel and tyre combination ⇒ page 364

Size:	6 1/2 J x 15
Wheel offset in mm:	43
Wheel load in kg:	490
Number of wheel bolt holes:	5

Vento 85 kW GT to 04.96

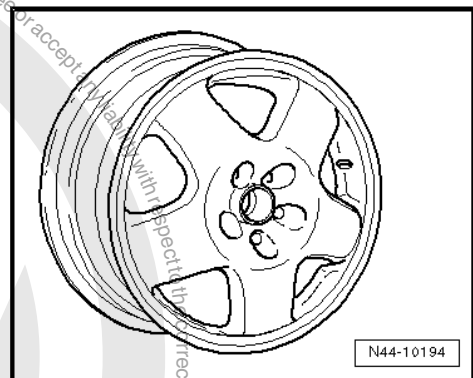




1H0 601 025 F - Wheel and tyre combination ⇒ page 364


Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	43
Wheel load in kg:	490
Number of wheel bolt holes:	5

Vento 85 kW GT, Vento VR6

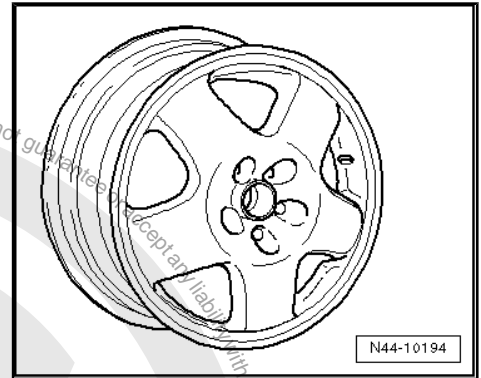


1H0 601 025 AA - Wheel and tyre combination ⇒ page 364

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	43
Wheel load in kg:	500
Number of wheel bolt holes:	5

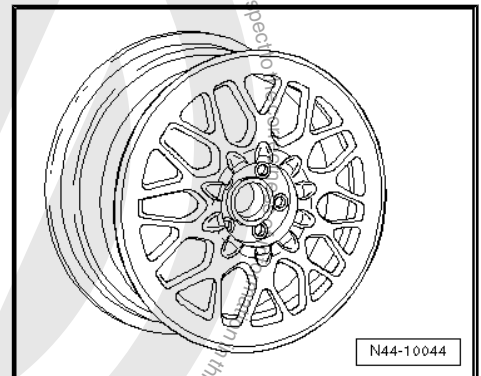


1H0 601 025 S- Wheel and tyre combination ⇒ page 364

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	43
Wheel load in kg:	490
Number of wheel bolt holes:	5

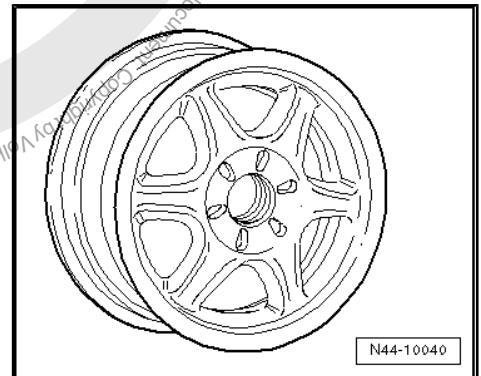

1H0 601 025 AB - Wheel and tyre combination ⇒ page 364


Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	43
Wheel load in kg:	510
Number of wheel bolt holes:	5

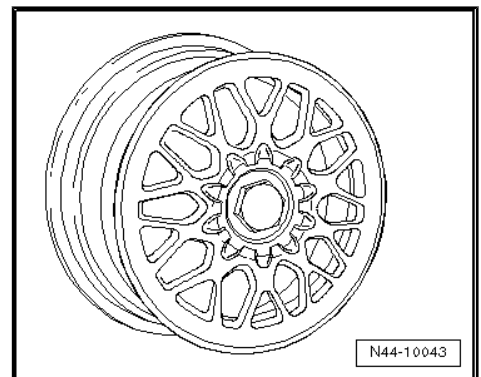




1H0 601 025 T - Wheel and tyre combination ⇒ page 364

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	43
Wheel load in kg:	490
Number of wheel bolt holes:	5

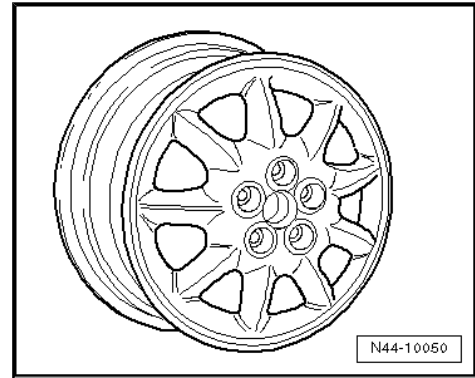


1H0 601 025 AF - Wheel and tyre combination ⇒ page 364

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	43
Wheel load in kg:	490
Number of wheel bolt holes:	5

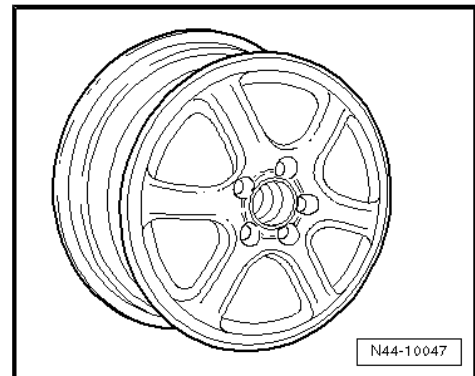


1H0 601 025 AG - Wheel and tyre combination ⇒ page 364

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	43
Wheel load in kg:	500
Number of wheel bolt holes:	5

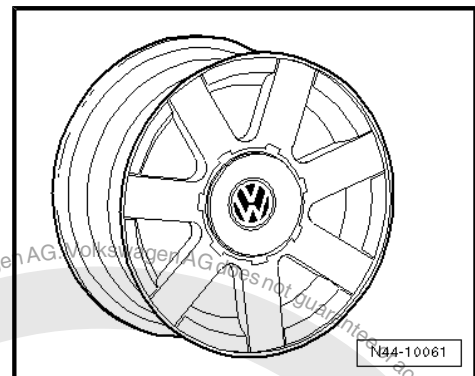

1H0 601 025 M - Wheel and tyre combination ⇒ page 364

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	43
Wheel load in kg:	490
Number of wheel bolt holes:	5

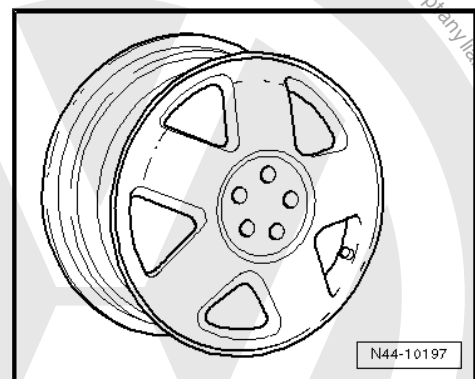


Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by Volkswagen AG. Volkswagen AG does not guarantee the accuracy or completeness of the information in this document. Copyright by Volkswagen AG.




535 601 025 D - Wheel and tyre combination ⇒ page 364

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	43
Wheel load in kg:	510
Number of wheel bolt holes:	5

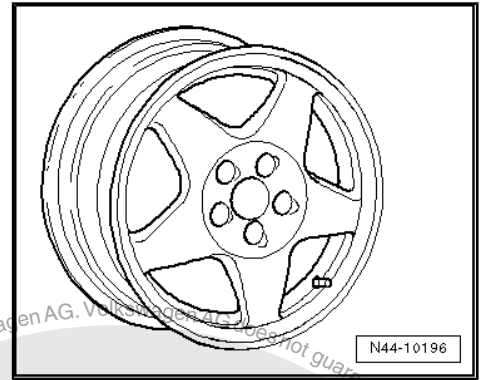


1H0 601 025 G - Wheel and tyre combination ⇒ page 364

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	43
Wheel load in kg:	490
Number of wheel bolt holes:	5

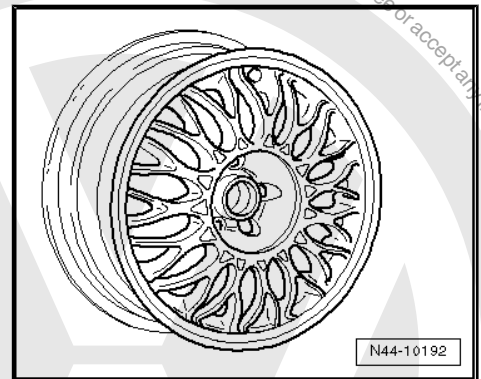

1H0 601 025 N - Wheel and tyre combination ⇒ page 364

Size:	6 ¹ / ₂ J x 15
Wheel offset in mm:	43
Wheel load in kg:	490
Number of wheel bolt holes:	5

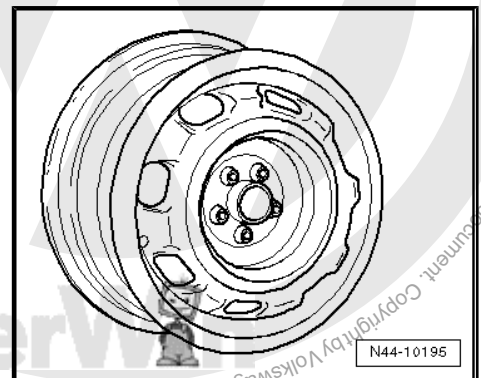



42 Bora model year 1999 to model year 2005

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of genuine Volkswagen spare parts only. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to disc-type wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

42.1 Bora, Bora 4Motion, type 1J model year 1999 to model year 2005

Appendix 2 to Parts Certificate 1958/04

Type Approval No.: e1*96/79*0071*05 to e1*96/79*0071*09

Type Approval No.: e1*98/14*0071*10 to e1*98/14*0071*30

Type Approval No.: e1*2001/116*0071*31 to e1*2001/116*0071*36

Overview

Model engine output	Tyres	Tyre size	Wheel	Offset in mm	Snow chains	Remarks
1.4l 55 kW petrol engine; 1.9l 50 kW diesel engine	Standard tyres	195/65 R 15 91T	6 J x 15 ≧ page 377	38	Yes	General information on: ◆ Winter tyres ≧ page 14 ◆ Snow chains ≧ page 17



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
	Modification	205/55 R 16 91H	6 ¹ / ₂ J x 16 ⇒ page 381	42	No	Tyre makes recommended by Volkswagen: ♦ Summer tyres ⇒ page 471 ♦ All-season tyres ⇒ page 484 ♦ Winter tyres ⇒ page 497
		225/45 R 17 91W	7 J x 17 ⇒ page 385	38	No	
	Winter tyres	195/65 R 15 91Q/T	6 J x 15 ⇒ page 377	38	Yes	
		205/55 R 16 91T/H	5 ¹ / ₂ J x 16 ⇒ page 380	36	Yes	
1.9l 66 kW TDI	Standard tyres	195/65 R 15 91T	6 J x 15 ⇒ page 377	38	Yes	The 225/45 R 17 tyre may be mounted on the 7 J x 17 or the 7 ¹ / ₂ J x 17 rim only if the listed conditions ⇒ page 388 are fulfilled!
	Modification	205/55 R 16 91H	6 ¹ / ₂ J x 16 ⇒ page 381	42	No	
		225/45 R 17 91W	7 J x 17 ⇒ page 385	38	No	
		225/45 R 17 91W	7 ¹ / ₂ J x 17 ⇒ page 387	38	No	
	Winter tyres	195/65 R 15 91Q/T	6 J x 15 ⇒ page 377	38	Yes	
		205/55 R 16 91T/H	5 ¹ / ₂ J x 16 ⇒ page 380	36	Yes	
1.6l 74 kW, 75 kW, 77 kW, 81 kW, 2.0l 85 kW petrol engine; 1.9l 74 kW, 81 kW, 85 kW TDI	Standard tyres	195/65 R 15 91H	6 J x 15 ⇒ page 377	38	Yes	The adhesive weights for balancing must be attached to the inner side of the rim of 6 ¹ / ₂ J x 16 aluminium wheels! 4Motion vehicles: Snow chains are permitted on the front wheels only.
	Modification	205/55 R 16 91H	6 ¹ / ₂ J x 16 ⇒ page 381	42	No	
		225/45 R 17 91W	7 J x 17 ⇒ page 385	38	No	
		225/45 R 17 91W	7 ¹ / ₂ J x 17 ⇒ page 387	38	No	



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
	Winter tyres	195/65 R 15 91Q/T	6 J x 15 ⇒ page 377	38	Yes	
		205/55 R 16 91T/H	5 ¹ / ₂ J x 16 ⇒ page 380	36	Yes	
1.8l 92 kW; 1.8l 110 kW; 2.3l 110 kW Petrol engines; 1.9l 96 kW TDI; 1.9l 110 kW TDI	Standard tyres	195/65 R15 91V	6 J x 15 ⇒ page 377	38	Yes	
	Modification	205/55 R 16 91V	6 ¹ / ₂ J x 16 ⇒ page 381	42	No	
		225/45 R 17 91W	7 J x 17 ⇒ page 385	38	No	
		225/45 R 17 91W	7 ¹ / ₂ J x 17 ⇒ page 387	38	No	
	Winter tyres	195/65 R 15 91Q/T	6 J x 15 ⇒ page 377	38	Yes	
		205/55 R 16 91T/H	5 ¹ / ₂ J x 16 ⇒ page 380	36	Yes	
1.8l 132 kW; 2.3l 125 kW	Standard tyres	205/55 R 16 91W	6 ¹ / ₂ J x 16 ⇒ page 383	42	No	
	Modification	205/55 R 16 91V	6 ¹ / ₂ J x 16 ⇒ page 383	42	No	
		225/45 R 17 91W	7 J x 17 ⇒ page 385	38	No	
		225/45 R 17 91W	7 ¹ / ₂ J x 17 ⇒ page 387	38	No	
	Winter tyres	205/55 R 16 91T/H	5 ¹ / ₂ J x 16 ⇒ page 380	36	Yes	
	2,8l 150 kW	Standard tyres	205/55 R 16 91W	6 ¹ / ₂ J x 16 ⇒ page 383	42	No
Modification		225/45 R 17 91W	7 J x 17 ⇒ page 385	38	No	
		225/45 R 17 91W	7 ¹ / ₂ J x 17 ⇒ page 387	38	No	
Winter tyres		205/55 R 16 91T/H	5 ¹ / ₂ J x 16 ⇒ page 380	36	Yes	



Tyre pressures can be found on the inside of the fuel tank flap or in => Maintenance ; Booklet 37 .

42.2 Wheel allocation Bora, Bora 4Motion, type 1J model year 1999 to model year 2005

Explanation of information on wheels => [page 57](#)

Wheel bolt torque settings => Running gear, axles, steering - front and four-wheel drive; Rep. gr. 44 ; Wheel bolt torque settings

Pitch circle diameter 100 mm

Number of wheel bolt holes: 5

42.2.1 6 J x 15




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table => [page 374](#) .

For vehicles with maximum permitted axle load of 1000 kg


1J0 601 025 N, 1J0 601 025 AG - Wheel and tyre combination
 => [page 374](#)

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	500

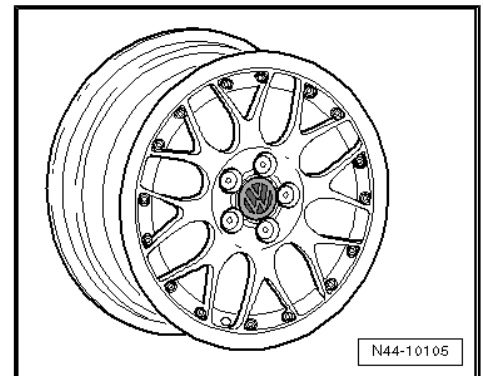

1J0 601 025 B, 1J0 601 025 AA - Wheel and tyre combination
 => [page 374](#)

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	500

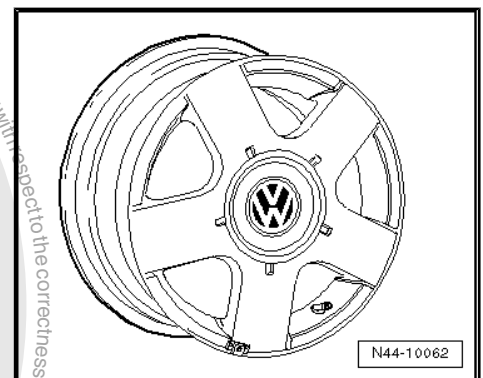


For vehicles up to and including 96 kW and petrol engines to 110 kW




1J0 601 027 - Wheel and tyre combination ⇒ [page 374](#)

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	550

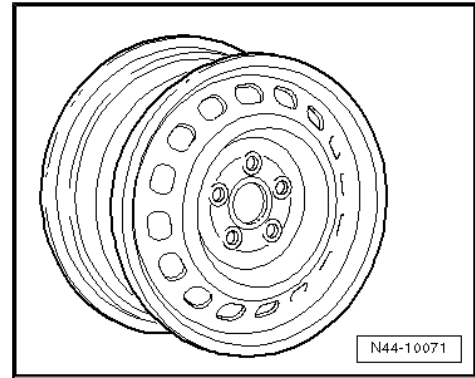


1J0 601 027 H, 1J0 601 027 Q - Wheel and tyre combination ⇒ [page 374](#)

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	550

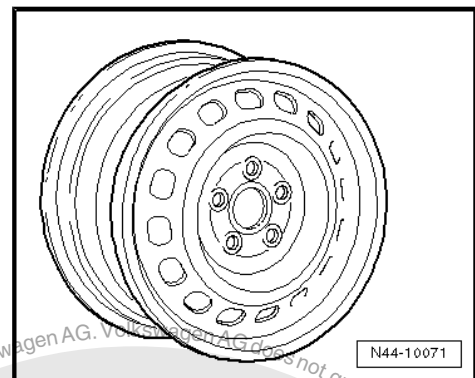


1J0 601 025 Q - Wheel and tyre combination ⇒ [page 374](#)

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	530

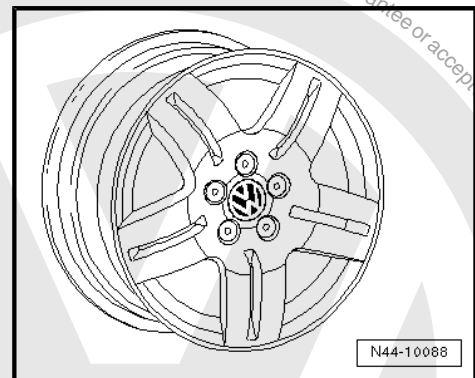

1J0 601 025 AK - Wheel and tyre combination ⇒ [page 374](#)


Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	580

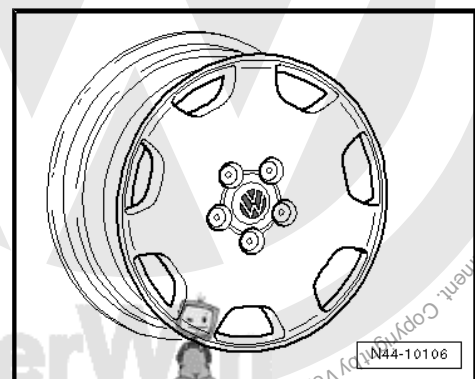




1C0 601 025 F - Wheel and tyre combination ⇒ page 374

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	550

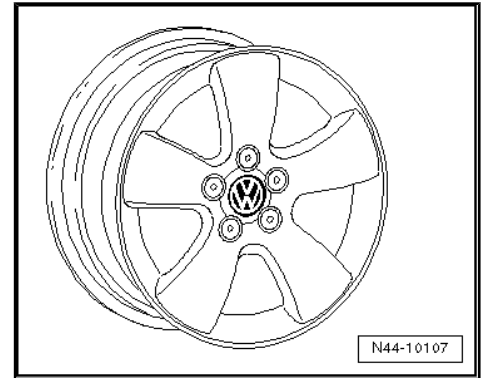

1J0 601 025 BD - Wheel and tyre combination ⇒ page 374


Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	580

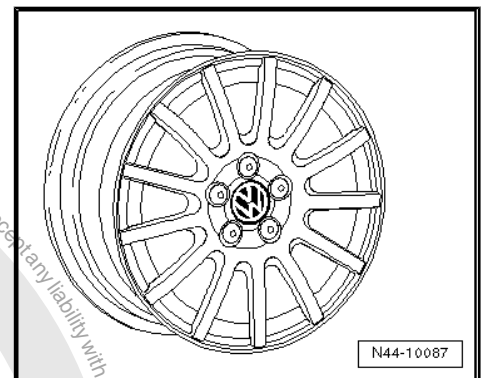


1J0 601 025 P, 1J0 601 025 AL - Wheel and tyre combination ⇒ page 374


Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	550

For vehicles with 110 kW TDI and petrol engines 1.8l 132 kW, 2.3l 125 kW, 2.8l 150 kW

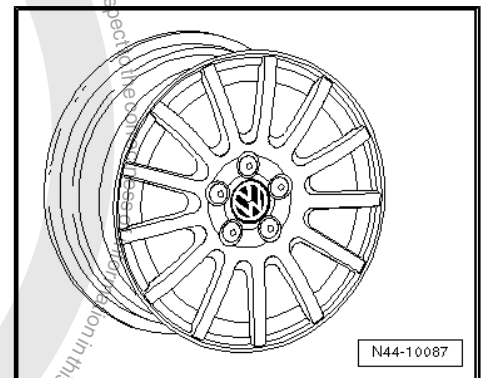

1J0 601 025 BD - Wheel and tyre combination ⇒ page 376


Size:	 6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	580

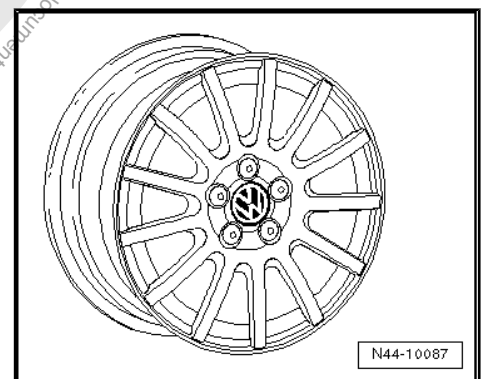



1J0 601 025 P, 1J0 601 025 AL - Wheel and tyre combination
⇒ [page 376](#)

Size:	6 J x 15
Wheel offset in mm:	38
Wheel load in kg:	550

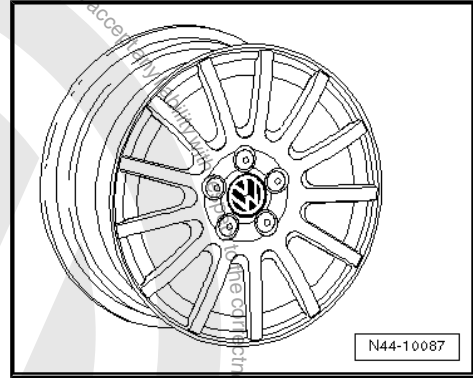

42.2.2 5¹/₂ J x 16



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 374](#).


For vehicles up to and including 96 kW and petrol engines to 110 kW

For vehicles with 110 kW TDI and petrol engines 1.8l 132 kW, 2.3l 125 kW, 2.8l 150 kW

Snow tyres


1J0 601 025 M, 1J0 601 025 AF - Wheel and tyre combination
⇒ [page 375](#)

Size:	5 ¹ / ₂ J x 16
Wheel offset in mm:	36
Wheel load in kg:	550

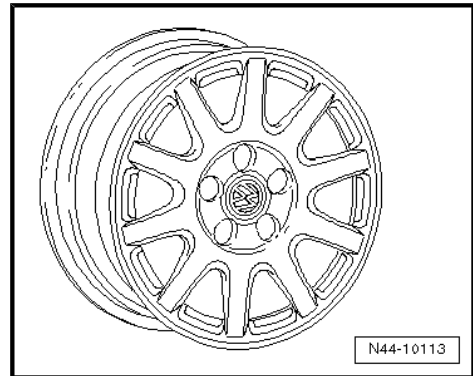

1J0 601 025 AP - Wheel and tyre combination ⇒ [page 375](#)

Size:	5 ¹ / ₂ J x 16
Wheel offset in mm:	36
Wheel load in kg:	550

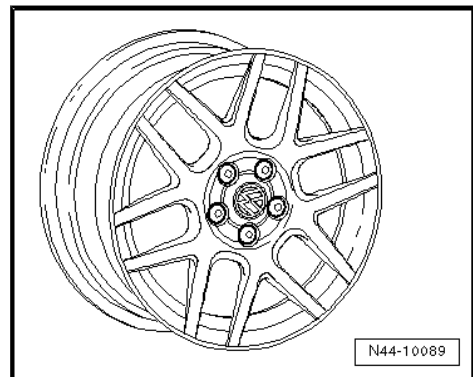



42.2.3 6¹/₂ J x 16




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 374](#).

For vehicles with maximum permitted axle load of 1000 kg
1C0 601 025 A, 1C0 601 025 D - Wheel and tyre combination
⇒ [page 375](#)


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	500

For vehicles up to and including 96 kW and petrol engines to 110 kW

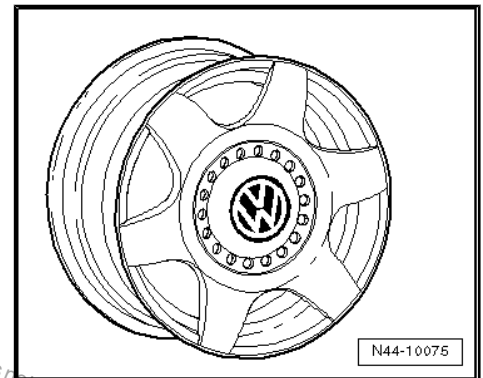


1J0 601 027 L, 1J0 601 027 R - Wheel and tyre combination
⇒ [page 375](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

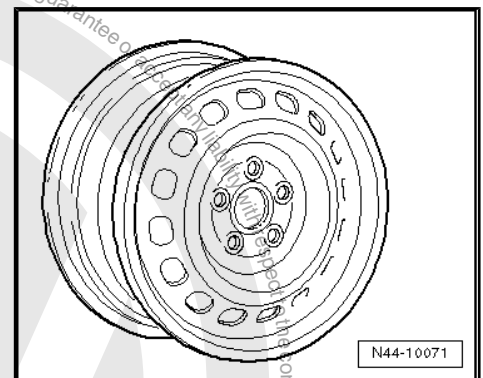

1J0 601 025 F, 1J0 601 025 AC - Wheel and tyre combination
⇒ [page 375](#)


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	530

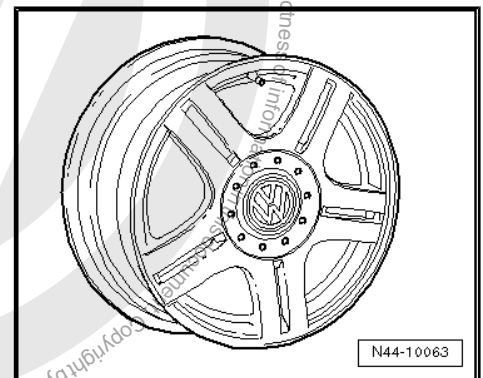




1J0 601 025 E, 1J0 601 025 AD - Wheel and tyre combination
⇒ [page 375](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	530

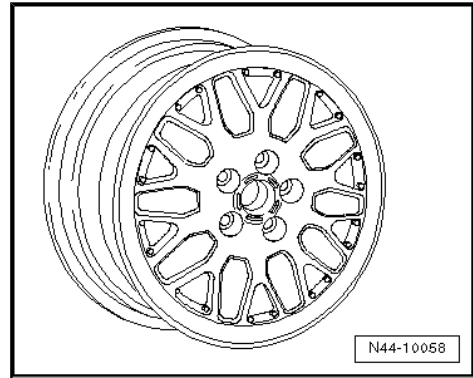


1J0 601 025 H, 1J0 601 025 AH - Wheel and tyre combination
⇒ [page 375](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	530

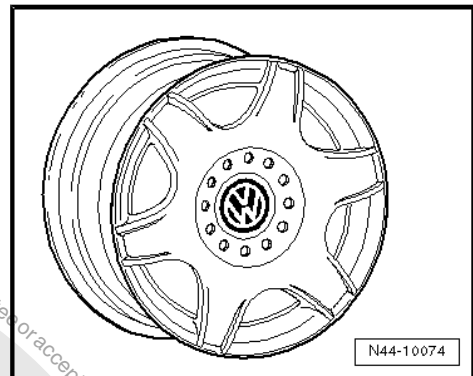


1J0 601 025 L, 1J0 601 025 AE - Wheel and tyre combination
⇒ [page 375](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

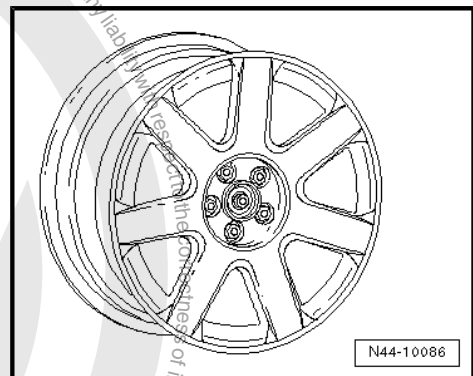

1C0 601 025 G - Wheel and tyre combination ⇒ [page 375](#)


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

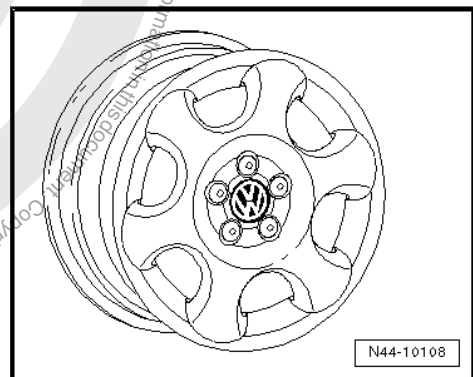




1C0 601 025 H - Wheel and tyre combination ⇒ [page 375](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

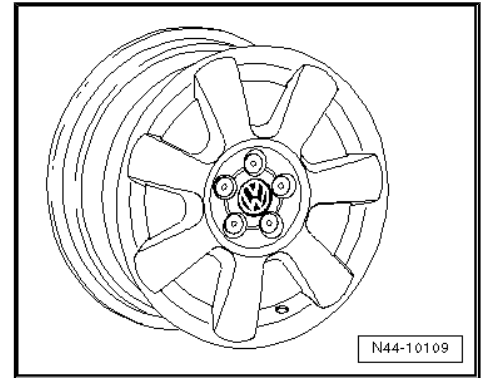


1J0 601 025 R, 1J0 601 025 AN - Wheel and tyre combination ⇒ [page 375](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

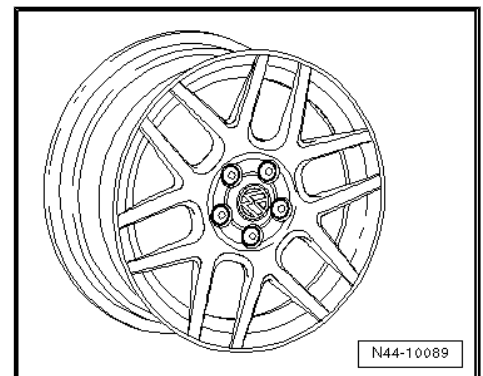

1J0 601 025 T, 1J0 601 025 AJ - Wheel and tyre combination ⇒ [page 375](#)


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

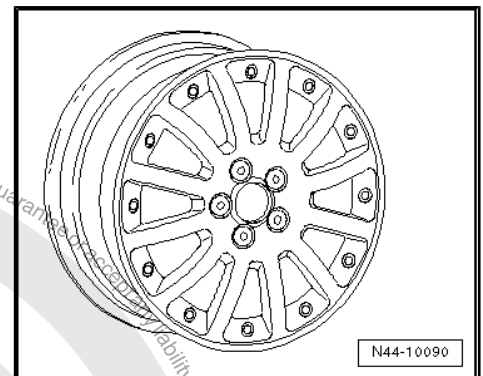

For vehicles with 110 kW TDI and petrol engines 1.8l 132 kW, 2.3l 125 kW, 2.8l 150 kW

1J0 601 027 L, 1J0 601 027 R - Wheel and tyre combination ⇒ [page 376](#)


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

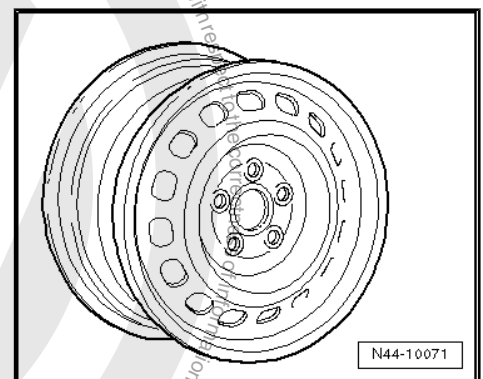




1J0 601 025 F, 1J0 601 025 AC - Wheel and tyre combination
⇒ [page 376](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	530

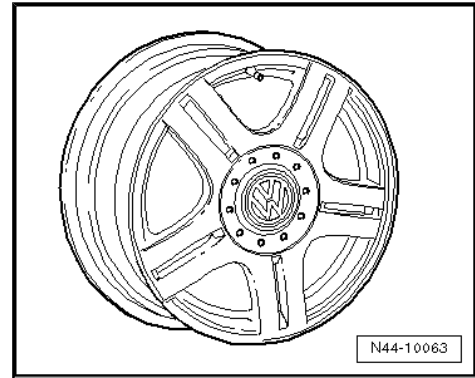


1J0 601 025 L, 1J0 601 025 AE - Wheel and tyre combination
⇒ [page 376](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

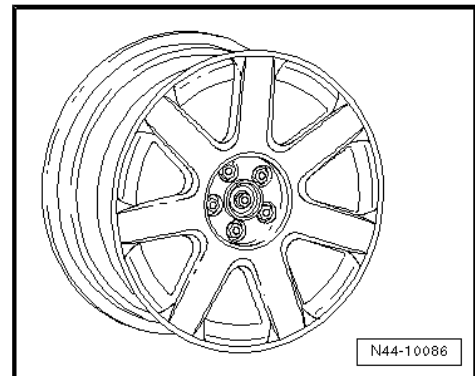


1J0 601 025 AN, 1J0 601 025 R - Wheel and tyre combination
⇒ [page 376](#)

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

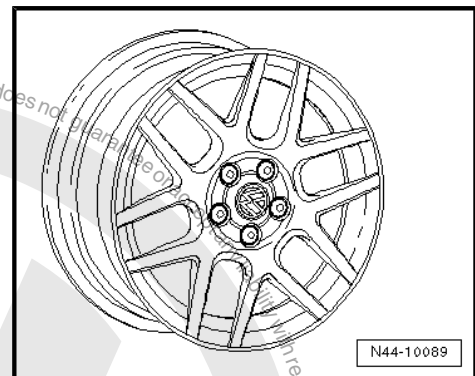

1J0 601 025 T, 1J0 601 025 AJ - Wheel and tyre combination
⇒ [page 376](#)


Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

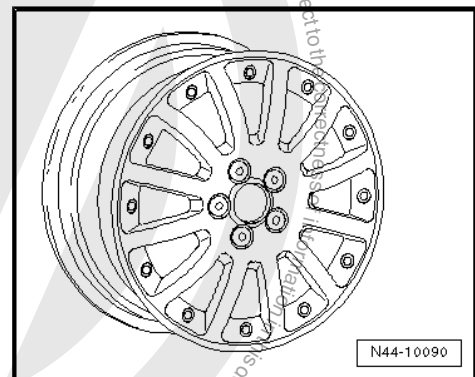




1C0 601 025 G - Wheel and tyre combination ⇒ page 376

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

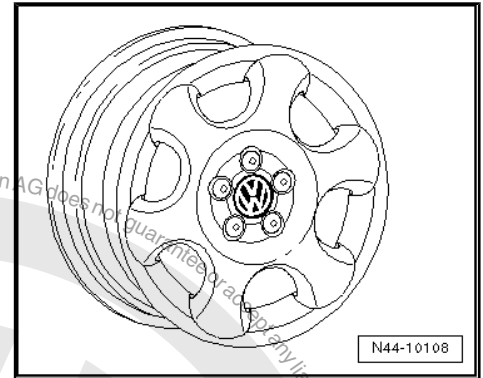

1C0 601 025 H - Wheel and tyre combination ⇒ page 376

Size:	6 ¹ / ₂ J x 16
Wheel offset in mm:	42
Wheel load in kg:	550

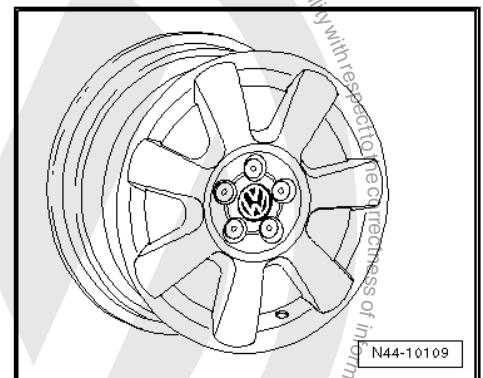

42.2.4 7 J x 17


The following wheels are permitted only if the stated conditions
 ⇒ [page 388](#) are fulfilled.

Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 374](#) .

**1J0 601 025 J, 1J0 601 025 S - Wheel and tyre combination
 ⇒ page 375**


Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	580

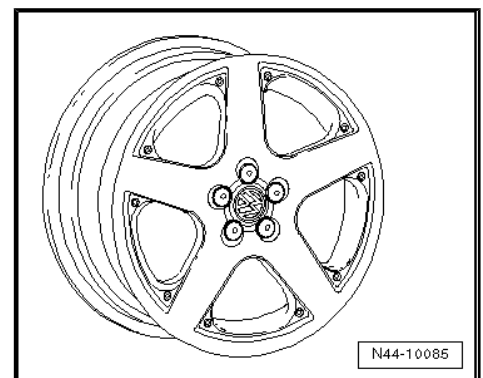




1J0 601 025 AB - Wheel and tyre combination ⇒ [page 375](#)

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

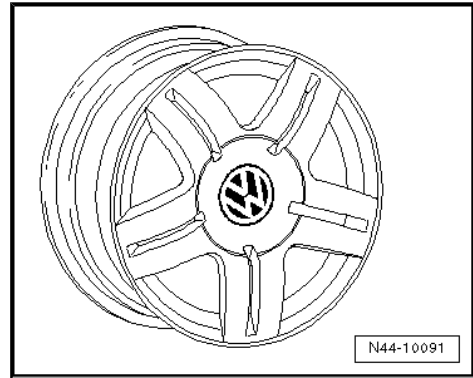


1C0 601 025 B, 1C0 601 025 E - Wheel and tyre combination ⇒ [page 375](#)

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

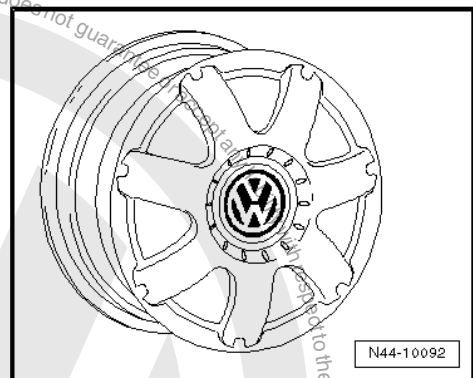

1C0 601 025 J - Wheel and tyre combination ⇒ [page 375](#)


Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

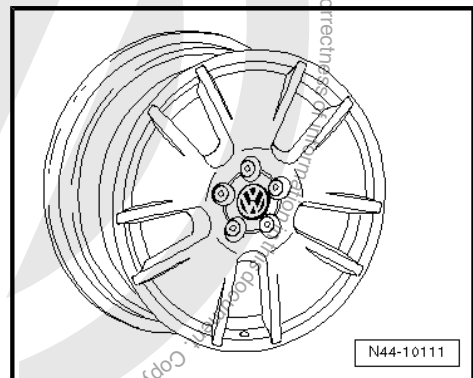

1C0 601 025 K, 1C0 601 025 Q - Wheel and tyre combination ⇒ [page 375](#)

Alloy disc-type wheels with exchangeable trim elements
⇒ [page 58](#)


Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

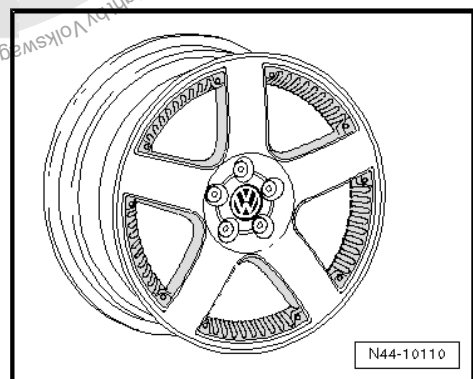




1J0 601 025 BE - Wheel and tyre combination ⇒ page 375

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

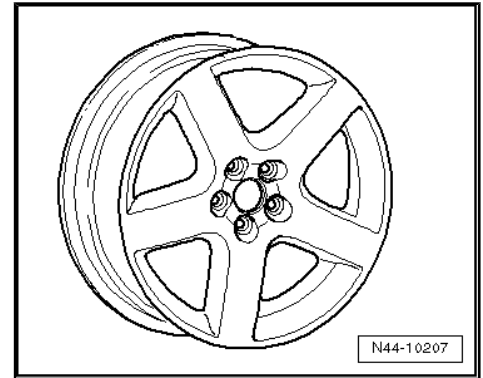


1J0 601 025 AS - Wheel and tyre combination ⇒ page 375

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

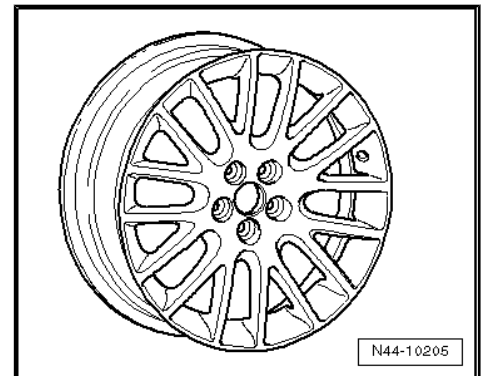


1C0 601 025 M - Wheel and tyre combination ⇒ page 375

Size:	7 J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

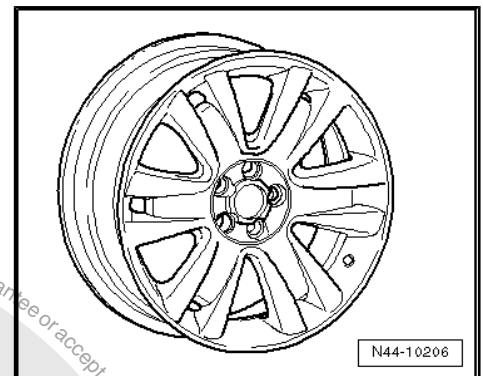

42.2.5 7 1/2 J x 17

The following wheels are permitted only if the stated conditions ⇒ [page 388](#) are fulfilled.


	<p>Caution</p> <p><i>Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 374 .</i></p>
---	---

Protected by copyright. Copying for private or commercial purposes is not permitted unless authorised by Volkswagen AG. Volkswagen AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by Volkswagen AG.




1J0 601 025 BF - Wheel and tyre combination ⇒ page 375

Size:	7 ¹ / ₂ J x 17
Wheel offset in mm:	38
Wheel load in kg:	550

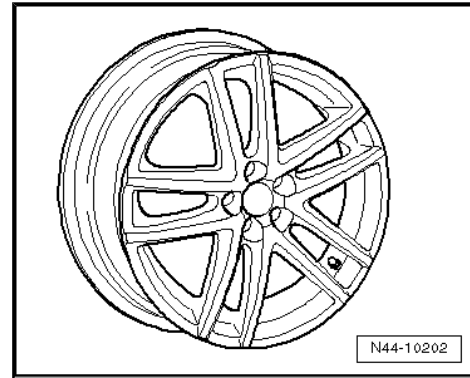

1J0 601 025 BH - Wheel and tyre combination ⇒ page 375

Size:	7 ¹ / ₂ J x 17
Wheel offset in mm:	38
Wheel load in kg:	560

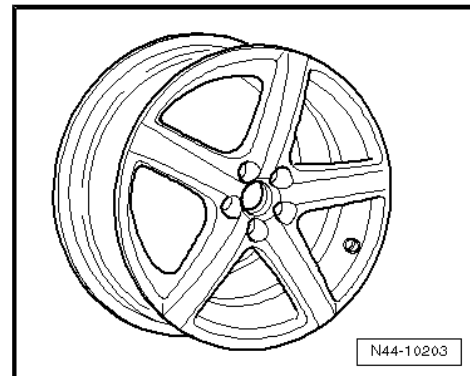

42.3 Conditions for fitting 17" wheels and tyres

17" wheels with 225/45 R 17 are possible only:

1. For vehicles from model year 2001.
2. If 17" sports running gear and a steering box with reduced steering arm travel are installed in the vehicle

Allocation of steering box PR No. to engine:	
PR No. of steering box	Engine
QZ 3 ¹¹⁾	1.8l; 2.0l; 2.3l petrol engines; 1.9l diesel engines
QZ 4 ¹¹⁾	Up to and including 1.6 l petrol engines
QZ 5 ¹¹⁾	VR6 (US version); VR6 4Motion

11) Replacement part numbers ⇒ Electronic parts catalogue „ETKA“


3. If tyres with a maximum width of 218 mm are used.
4. If snow chains are not used.

Maximum width of 17" tyres

If a vehicle is retrofitted with 17" tyres or if existing 17" tyres are renewed, use only tyres with a maximum width -a- which does not exceed 218 mm during use ¹²⁾.

12) The measured width of the tyre including lettering on 7 J x 17 or 7¹/₂ J x 17 and at the specified tyre pressure.

If wider tyres are used, under certain circumstances, the tyres may contact the front axle and the bodywork while the car is being driven.

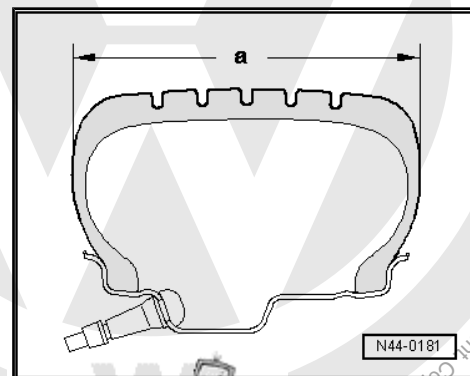



43 New Beetle RSi

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of genuine Volkswagen spare parts only. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to disc-type wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

43.1 New Beetle RSi, type 9CR from model year 2001

Appendix 2 to Parts Certificate 1486/03

Type Approval No.: e1*98/14*0152*00

Overview

Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
3.2l 165 kW	Standard tyres	235/40 R 18 91W	9 J x 18 ⇒ page 390	10	No	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17
	Modification	No changes are permissible apart from the standard wheel and tyre combinations!				Tyre makes recommended by Volkswagen:



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
	Winter tyres	205/55 R 16 91H	7 J x 16 ⇒ page 390	10	Yes	<ul style="list-style-type: none"> ◆ Summer tyres ⇒ page 476 ◆ Winter tyres ⇒ page 500

43.2 Wheel allocation for New Beetle RSi, type 9CR from model year 2001

Explanation of information on wheels ⇒ [page 57](#)

Torque specification for wheel bolts ⇒ Running gear, axles, steering; Rep. gr. 44 ; Wheels and tyres; Fitting notes on removing and installing wheels

Pitch circle diameter

100 mm

Number of wheel bolt holes:

5

43.2.1 7 J x 16




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 389](#) .

Winter wheel

1C9 601 025 A - wheel/tyre combination ⇒ [page 390](#)

Size:	7 J x 16
Wheel offset in mm:	10
Wheel load in kg:	520

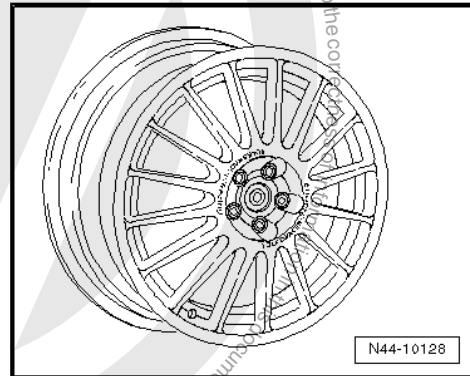

43.2.2 9 x 18




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 389](#) .



1C9 601 025 - wheel/tyre combination ⇒ [page 389](#)

Size:	9 x 18
Wheel offset in mm:	10
Wheel load in kg:	520

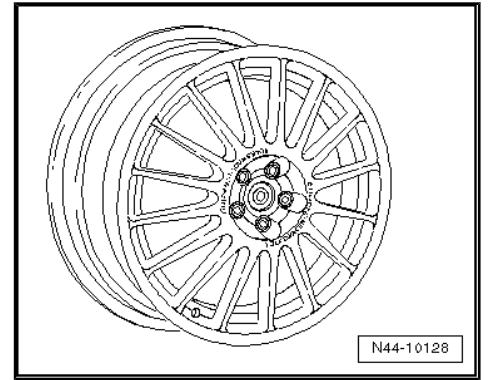



44 Passat model year 1994 to model year 1997

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of genuine Volkswagen spare parts only. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to disc-type wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

44.1 Passat, type 35I model year 1994 to model year 1997

Appendix 2 to Parts Certificate 1481/00

General type approval No. for Passat front-wheel drive; E 657/1 Supplement 5

General type approval No. for Passat Syncro; E 960 Supplement 8

Overview

Model engine output	Tyres	Tyre size	Wheel	Offset in mm	Snow chains	Remarks
55 kW petrol and diesel engines	Standard tyres	185/65 R 14 86T	6 J x 14 ⇒ page 394	38	Yes	205/50 R 15 86 tyres are standard on vehicles having GT equipment



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks	
	Modification	185/65 R 14 86S	6 J x 14 ⇒ page 394	38	Yes	General information on: ♦ Winter tyres ⇒ page 14 ♦ Snow chains ⇒ page 17 Tyre makes recommended by Volkswagen: ♦ Summer tyres ⇒ page 476 ♦ Winter tyres ⇒ page 500	
		195/60 R 14 86S	6 J x 14 ⇒ page 394	38	Yes		
		205/50 R 15 86S	6 J x 15 ⇒ page 396	35	Yes		
	Winter tyres	185/65 R 14 85Q	6 J x 14 ⇒ page 394	38	Yes		
66 kW petrol and diesel engines; Saloon/Estate; 66 kW TDI Syncro	Standard tyres	185/65 R 14 86T	6 J x 14 ⇒ page 394	38	Yes		
	Modification	195/60 R 14 86T	6 J x 14 ⇒ page 394	38	Yes		
		205/50 R 15 86T	6 J x 15 ⇒ page 396	35	Yes		
	Winter tyres	185/65 R 14 85Q	6 J x 14 ⇒ page 394	38	Yes		
74 kW, 85 kW Saloon/Estate; 85 kW Syncro	Standard tyres	195/60 R 14 86H	6 J x 14 ⇒ page 394	38	Yes		
	Modification	185/65 R 14 85H	6 J x 14 ⇒ page 394	38	Yes		
		205/50 R 15 86H* ⇒ page 393	6 J x 15 ⇒ page 394	35	Yes		
	Winter tyres	185/65 R 14 85Q	6 J x 14 ⇒ page 394	38	Yes		
81 kW TDI 81 kW Syncro Saloon/Estate;	Standard tyres	205/50 R 15 86H	6 J x 15 ⇒ page 398	35	Yes	*Not for vehicles with heavy-duty running gear (1BB) Syncro vehicles: Snow chains are permitted on the front wheels only.	
	Modification	No changes are permissible apart from the standard wheel and tyre combinations!					
	Winter tyres	195/55 R 15 85T	6 J x 15 ⇒ page 396	35	Yes		Vehicles with front-wheel drive
		205/50 R 15 86T	6 J x 15 ⇒ page 396	35	Yes		Syncro vehicles
110 kW Saloon/Estate	Standard tyres	205/50 R 15 86W	6 J x 15 ⇒ page 398	35	Yes		



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
	Modification	205/50 R 15 86V	6 J x 15 ⇒ page 398	35	Yes	
	Winter tyres	195/55 R 15 85T	6 J x 15 ⇒ page 398	35	Yes	
128 kW VR6 Saloon/Estate	Standard tyres	205/50 R 15 86W	6 J x 15 ⇒ page 398	35	Yes	
	Modification	205/50 ZR 15 86W** ⇒ page 394	6 J x 15 ⇒ page 398	35	Yes	**Tyres with this double rating were offered by tyre dealers only during a transition period after which W tyres were offered.
	Winter tyres	195/55 R 15 85T	6 J x 15 ⇒ page 398	35	Yes	
135 kW Syncro Estate	Standard tyres	205/50 R 15 86W	6 J x 15 ⇒ page 398	35	Yes	Syncro vehicles: Snow chains are permitted on the front wheels only.
	Modification	205/50 ZR 15 86W** ⇒ page 394	6 J x 15 ⇒ page 398	35	Yes	
	Winter tyres	205/50 R 15 86T	6 J x 15 ⇒ page 398	35	Yes	

Tyre pressures can be found on the inside of the fuel tank flap or in ⇒ Maintenance ; Booklet 27 .

44.2 Wheel allocation Passat, type 35I model year 1994 to model year 1997

Explanation of information on wheels ⇒ [page 57](#)

Torque specifications for wheel bolts ⇒ Running gear, axles, steering; Rep. gr. 40 ; Repairing front suspension (basic running gear); Removing and installing wheel bearing, strut, drive shaft (basic suspension) or ⇒ Running gear, axles, steering; Rep. gr. 40 ; Repairing front suspension (plus running gear); Removing and installing wheel bearing, strut (plus running gear)

Pitch circle diameter 100 mm

44.2.1 6 J x 14



Caution


Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 392](#) .



Saloon/Estate 55 to 85 kW petrol engine front-wheel drive,
Estate Syncro 85 kW,
55 to 66 kW diesel engines, front-wheel drive


357 601 025 A/B/Q - Wheel and tyre combination ⇒ [page 392](#)

Size:	6 J x 14
Wheel offset in mm:	38
Wheel load in kg:	530
Number of wheel bolt holes:	4

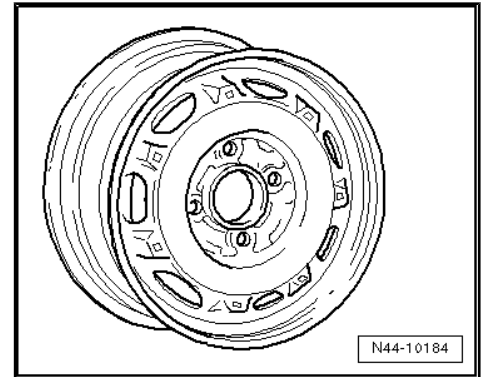


357 601 025 AB/AC - Wheel and tyre combination ⇒ [page 392](#)

Size:	6 J x 14
Wheel offset in mm:	38
Wheel load in kg:	530
Number of wheel bolt holes:	4

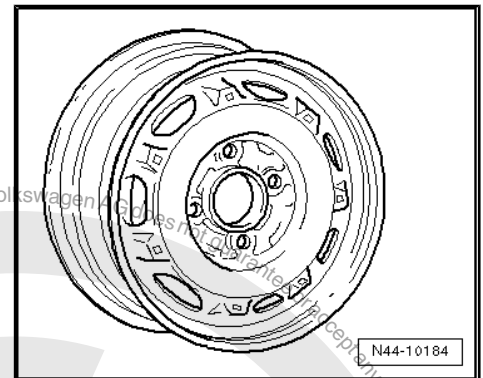

357 601 025 C - Wheel and tyre combination ⇒ [page 392](#)

Size:	6 J x 14
Wheel offset in mm:	38
Wheel load in kg:	515
Number of wheel bolt holes:	4

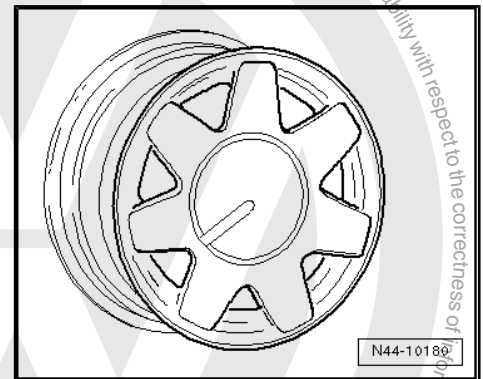


171 601 025 H - Wheel and tyre combination ⇒ [page 392](#)

 **Note**

Not for Estate Syncro 85 kW!


Size:	6 J x 14
Wheel offset in mm:	38
Wheel load in kg:	515
Number of wheel bolt holes:	4

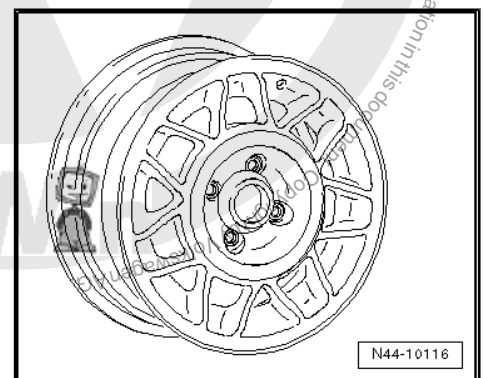



191 601 025 F - Wheel and tyre combination ⇒ page 392

Size:	6 J x 14
Wheel offset in mm:	38
Wheel load in kg:	510
Number of wheel bolt holes:	4

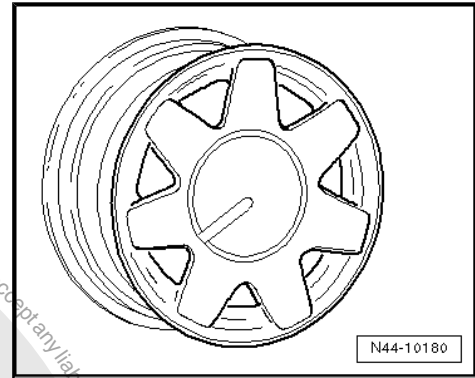


321 601 025 N - Wheel and tyre combination ⇒ page 392



Note


Not for Estate Syncro 85 kW!

Size:	6 J x 14
Wheel offset in mm:	38
Wheel load in kg:	500
Number of wheel bolt holes:	4

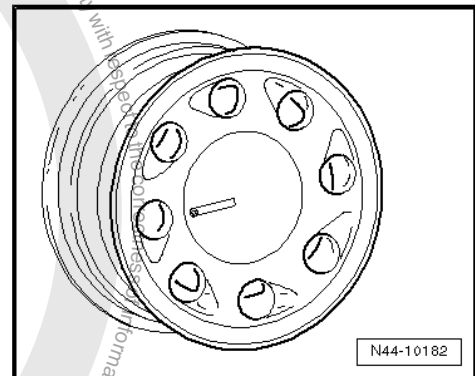

357 601 025 N - Wheel and tyre combination ⇒ page 392

Size:	6 J x 14
Wheel offset in mm:	38
Wheel load in kg:	510
Number of wheel bolt holes:	4

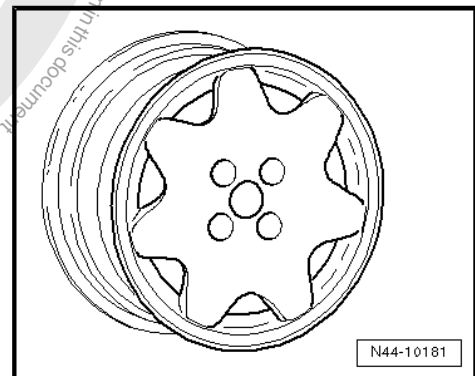

44.2.2 6 J x 15



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 392 .




Saloon/Estate 55 to 85 kW petrol engine front-wheel drive,

Estate Syncro 85 kW,

55 to 66 kW diesel engines, front-wheel drive


535 601 025 B/F - Wheel and tyre combination ⇒ [page 393](#)

Size:	6 J x 15
Wheel offset in mm:	35
Wheel load in kg:	510
Number of wheel bolt holes:	4

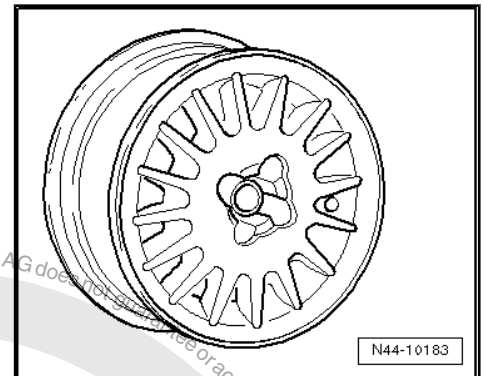


3A0 601 025 B - Wheel and tyre combination ⇒ [page 393](#)

Size:	6 J x 15
Wheel offset in mm:	35
Wheel load in kg:	530
Number of wheel bolt holes:	4

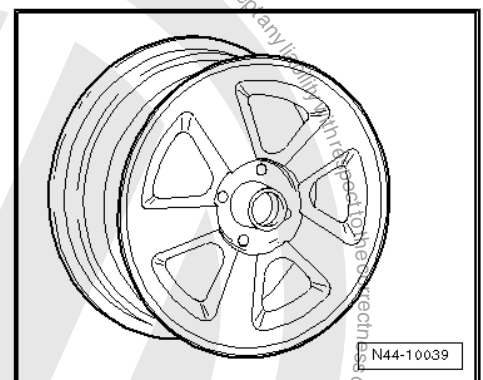


357 601 025 G - Wheel and tyre combination ⇒ [page 393](#)

Size:	6 J x 15
Wheel offset in mm:	35
Wheel load in kg:	510
Number of wheel bolt holes:	4

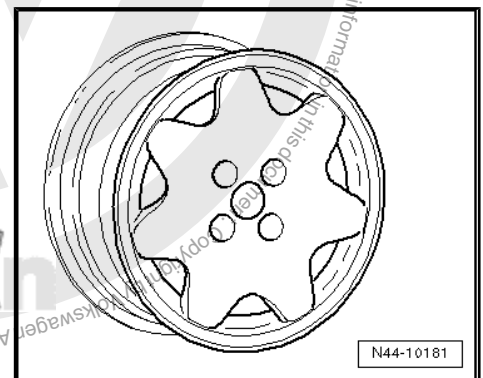

191 601 025 Q/AD - Wheel and tyre combination ⇒ [page 393](#)

Size:	6 J x 15
Wheel offset in mm:	35
Wheel load in kg:	510
Number of wheel bolt holes:	4

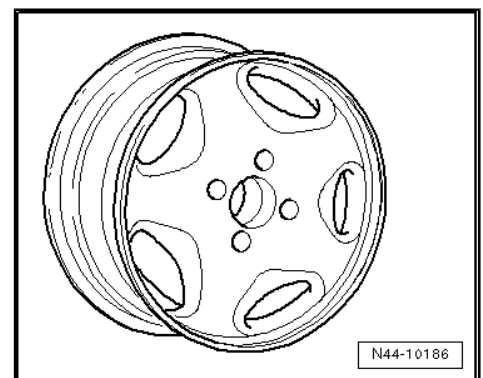




357 601 025 M - Wheel and tyre combination ⇒ page 393


Size:	6 J x 15
Wheel offset in mm:	35
Wheel load in kg:	530
Number of wheel bolt holes:	4

Saloon/Estate 16V and VR6 as well as 81 kW TDI Syncro, 135 kW VR6 Syncro

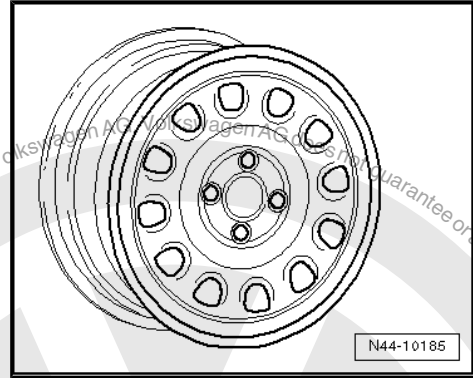


357 601 025 AA - Wheel and tyre combination ⇒ page 393

Size:	6 J x 15
Wheel offset in mm:	35
Wheel load in kg:	510
Number of wheel bolt holes:	5

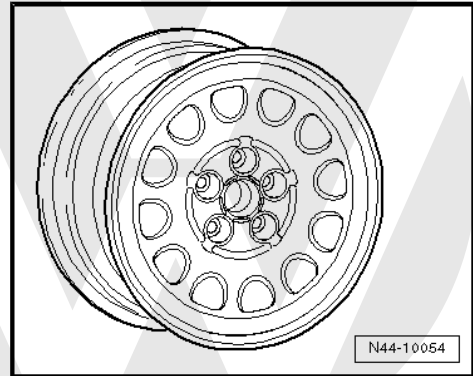


3A0 601 027 - Wheel and tyre combination ⇒ page 393

Size:	6 J x 15
Wheel offset in mm:	35
Wheel load in kg:	530
Number of wheel bolt holes:	5

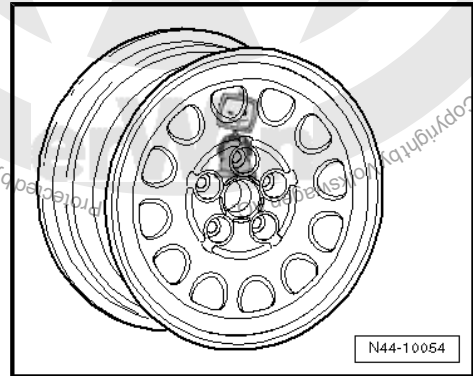

357 601 025 S - Wheel and tyre combination ⇒ page 393


Size:	6 J x 15
Wheel offset in mm:	35
Wheel load in kg:	530
Number of wheel bolt holes:	5

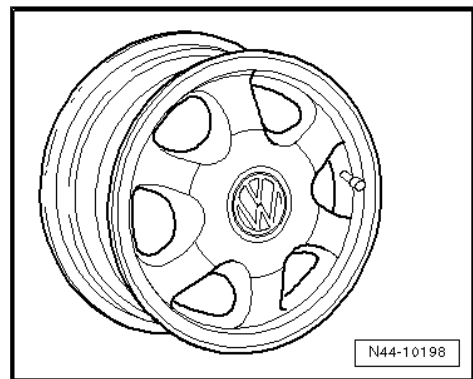




357 601 025 T - Wheel and tyre combination ⇒ [page 393](#)

Size:	6 J x 15
Wheel offset in mm:	35
Wheel load in kg:	530
Number of wheel bolt holes:	5

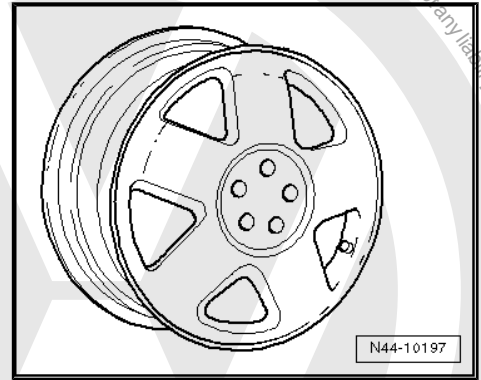

3A0 601 025 A - Wheel and tyre combination ⇒ [page 393](#)

Size:	6 J x 15
Wheel offset in mm:	35
Wheel load in kg:	530
Number of wheel bolt holes:	5

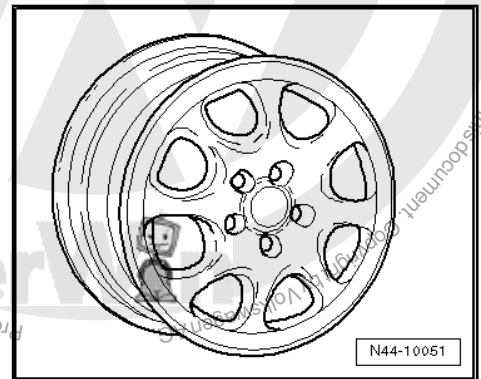



45 Passat model year 1997 to model year 2005

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of genuine Volkswagen spare parts only. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to disc-type wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

45.1 Passat, Passat estate, type 3B model year 1997 to model year 2000


Appendix 2 to Parts Certificate 2523/03

Type Approval No.: e1*95/54*0043*00 to e1*95/54*0043*10

Type Approval No.: e1*98/14*D0043*11

Type Approval No.: e1*98/14*0043*12 to e1*98/14*0043*15

Overview

Model engine output	Tyres	Tyre size	Wheel	Offset in mm	Snow chains	Remarks
1.9l 66 kW TDI Saloon/Estate	Standard tyres	195/65 R 15 91T	6 J x 15  page 402	45	Yes	Syncro and 4Motion vehicles: Snow chains are permitted on the front wheels only.



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
	Modification	205/60 R 15 91T	7 J x 15 ⇒ page 403	45	No	General information on: ♦ Winter tyres ⇒ page 14 ♦ Snow chains ⇒ page 17 Tyre makes recommended by Volkswagen: ♦ Summer tyres ⇒ page 477 ♦ All-season tyres ⇒ page 486 ♦ Winter tyres ⇒ page 501
		205/55 R 16 91T	7 J x 16 ⇒ page 404	45	No	
	Winter tyres	195/65 R 15 91Q/T	6 J x 15 ⇒ page 402	45	Yes	
1.6l 74 kW; 1.9l 74 kW, 81 kW und 85 kW TDI Saloon/Estate	Standard tyres	195/65 R 15 91V	6 J x 15 ⇒ page 402	45	Yes	Winter tyres with „V-rating“ ⇒ page 15
	Modification	195/65 R 15 91H	6 J x 15 ⇒ page 402	45	Yes	
		205/60 R 15 91H	7 J x 15 ⇒ page 403	45	No	
		205/55 R 16 91H	7 J x 16 ⇒ page 404	45	No	
	Winter tyres	195/65 R 15 91Q/T	6 J x 15 ⇒ page 402	45	Yes	
2.0l 88 kW; 1.8l 92 kW, 110 kW; 2.3l 110 kW, 125 kW; 2.5l 110 kW with front-wheel drive, Saloon/Estate	Standard tyres	195/65 R 15 91V	6 J x 15 ⇒ page 402	45	Yes	
	Modification	205/60 R 15 91V	7 J x 15 ⇒ page 403	45	No	
		205/55 R 16 91V	7 J x 16 ⇒ page 404	45	No	
	Winter tyres	195/65 R 15 91Q/T/H/V	6 J x 15 ⇒ page 402	45	Yes	
2.5l 110 kW Syncro/4Motion Saloon/Estate 2.8l 142 kW front-wheel drive and Syncro/4Motion Saloon/Estate	Standard tyres	195/65 R 15 91W	6 J x 15 ⇒ page 402	45	Yes	
	Modification	205/60 R 15 91W	7 J x 15 ⇒ page 403	45	No	
		205/55 R 16 91W	7 J x 16 ⇒ page 404	45	No	



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
	Winter tyres	195/65 R 15 91Q/T/H/V	6 J x 15 ≧ page 402	45	Yes	

Tyre pressures can be found on the inside of the fuel tank flap or in ⇒ Maintenance ; Booklet 36 .

45.2 Passat, Passat estate, type 3B model year 1997 to model year 2000

Explanation of information on wheels ⇒ [page 57](#)

Torque specifications for wheel bolts ⇒ Running gear, axles, steering - front and four-wheel drive; Rep. gr. 44 ; Fitting wheels and tyres; Fitting wheels

Pitch circle diameter 112 mm
Number of wheel bolt holes: 5

45.2.1 6 J x 15



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 400](#) .

Saloon/Estate with front-wheel drive saloon Syncro/4Motion, Estate Syncro/4Motion to maximum permitted axle load of 1180 kg



8D0 601 025 D - Wheel and tyre combination ⇒ [page 400](#)

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	590

All saloons and estates with front-wheel drive; all Syncro or 4Motion saloons, all Syncro or 4Motion estates

8D0 601 027 - Wheel and tyre combination ⇒ [page 400](#)


Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	605

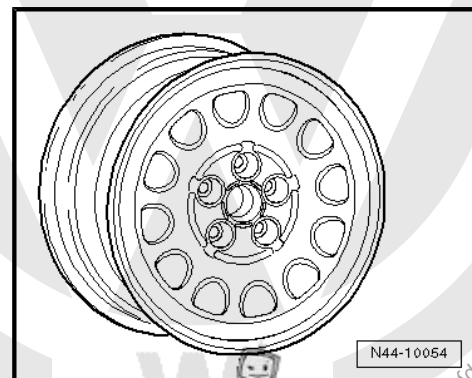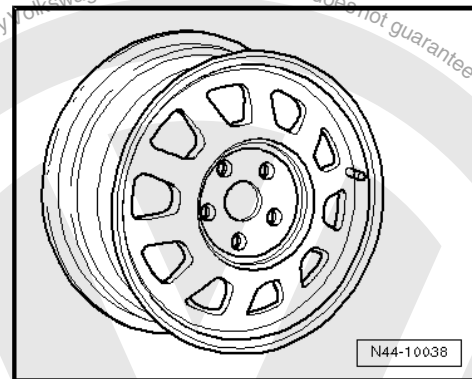




4A0 601 025 J - Wheel and tyre combination ⇒ page 400

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	605

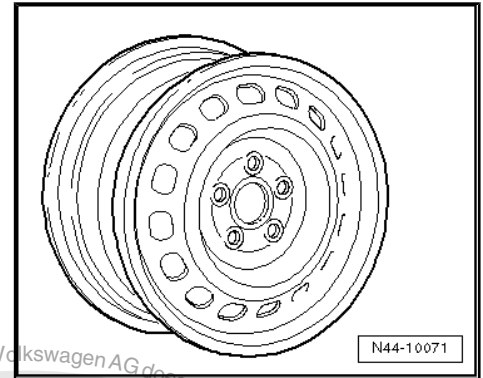


4B0 601 027 - Wheel and tyre combination ⇒ page 400

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	605

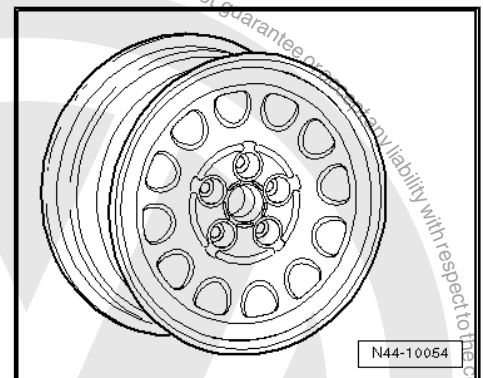

4B0 601 025 J, 4B0 601 025 N - Wheel and tyre combination ⇒ page 400

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	605

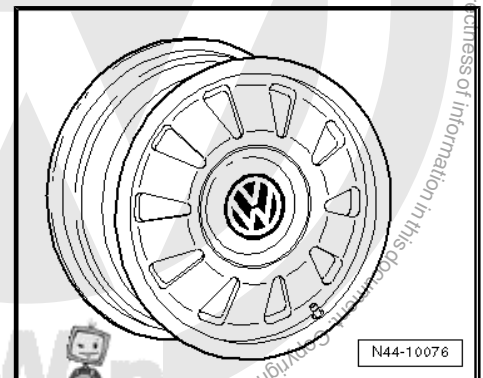

45.2.2 7 J x 15



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 400 .



Saloons and estates with front-wheel drive to maximum permitted axle load of 1150 kg,

Saloon Syncro/4Motion, Estate Syncro/4Motion to maximum axle load 1150 kg

3B0 601 025 A/C - Wheel and tyre combination ⇒ [page 401](#)



Size:	7 J x 15
Wheel offset in mm:	45
Wheel load in kg:	575

Saloons and estates with front-wheel drive to maximum permitted axle load of 1,160 kg,

Saloon Syncro/4Motion, Estate Syncro/4Motion to maximum axle load 1160 kg

3B0 601 027 - Wheel and tyre combination ⇒ [page 401](#)

Size:	7 J x 15
Wheel offset in mm:	45
Wheel load in kg:	580

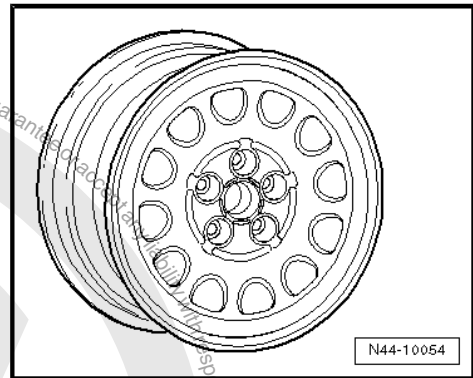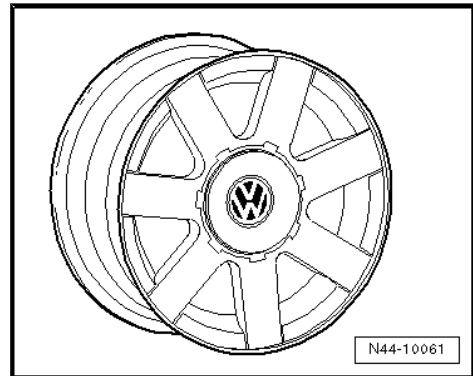

45.2.3 7 J x 16



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 400](#) .


Saloons and estates with front-wheel drive to maximum permitted axle load of 1,160 kg,

Saloon Syncro/4Motion, Estate Syncro/4Motion to maximum axle load 1160 kg

3B0 601 027 A - Wheel and tyre combination ⇒ [page 401](#)

Size:	7 J x 16
Wheel offset in mm:	45
Wheel load in kg:	580


Saloon/Estate with front-wheel drive saloon Syncro/4Motion, Estate Syncro/4Motion to maximum permitted axle load of 1,190 kg

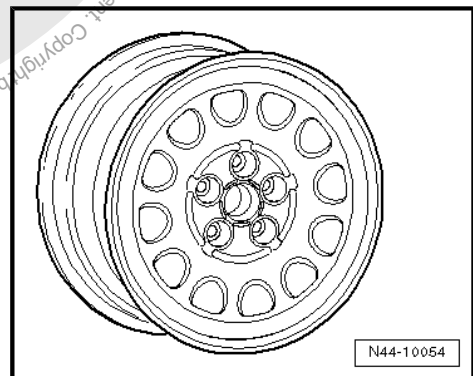



3B0 601 025 G - Wheel and tyre combination ⇒ [page 401](#)

Size:	7 J x 16
Wheel offset in mm:	45
Wheel load in kg:	595

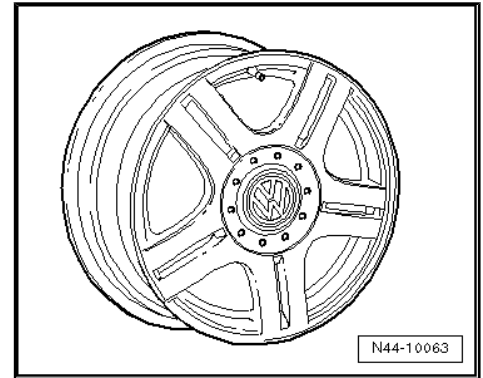

45.3 Passat, Passat estate, type 3BG model year 2001 to model year 2005

Appendix 2 to Parts Certificate 2523/03

Type Approval No. e1*98/14*0157*00 to e1*98/14*0157*09

Type Approval No.: e1*2001/116*0157*10 to e1*2001/116*0157*12

Overview

Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
1.6l 75 kW Saloon/Estate; 1.9l 74 kW TDI Saloon/Estate 2.0l 85 kW Saloon/Estate, front-wheel drive and 4Motion	Standard tyres	195/65 R 15 91V	6 J x 15 ⇒ page 407	37	Yes	4Motion vehicles: Snow chains are permitted on the front wheels only.
	Modification	195/65 R 15 91H	6 J x 15 ⇒ page 407	37	Yes	*17" wheels and tyres: This combination of wheels and tyres is not permitted for vehicles with front-wheel drive and sports running gear.
		205/60 R 15 91H	7 J x 15 ⇒ page 408	37	No	
		205/55 R 16 91H	7 J x 16 ⇒ page 409	37	No	
		225/45 R 17 91H* ⇒ page 405	7 J x 17* ⇒ page 405 ⇒ page 411	37	No	Winter tyres with „V-rating“ ⇒ page 15
	Winter tyres	195/65 R 15 91Q/T	6 J x 15 ⇒ page 407	37/4 5	Yes	
1.8l 110 kW Saloon/Estate; 1.9l 96 kW TDI Saloon/Estate, front-wheel drive or 4Motion; 2.0l 96 kW Saloon/Estate, front-wheel drive	Standard tyres	195/65 R 15 91V	6 J x 15 ⇒ page 407	37	Yes	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17
	Modification	205/60 R 15 91V	7 J x 15 ⇒ page 408	37	No	Tyre makes recommended by Volkswagen:



Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
2.0l 100 kW TDI Saloon/Estate, front-wheel drive		205/55 R 16 91V	7 J x 16 ⇒ page 409	37	No	<ul style="list-style-type: none"> ◆ Summer tyres ⇒ page 477 ◆ All-season tyres ⇒ page 486 ◆ Winter tyres ⇒ page 501
		225/45 R 17 91V* ⇒ page 405	7 J x 17* ⇒ page 405	37	No	
	Winter tyres	195/65 R 15 91Q/T	6 J x 15 ⇒ page 407	37/4 5	Yes	
V5 2.3l 125 kW Saloon/Estate, front-wheel drive and 4Motion	Standard tyres	205/55 R 16 91V	7 J x 16 ⇒ page 410	37	No	
	Modification	205/55 R 16 91W	7 J x 16 ⇒ page 410	37	No	
		225/45 R 17 91V/W/Y* ⇒ page 405	7 J x 17* ⇒ page 405	37	No	
	Winter tyres	205/55 R 16 91T/V	6 J x 16 ⇒ page 408	40	Yes	
V6 TDI 2.5l 110 kW Saloon/Estate, front-wheel drive and 4Motion	Standard tyres	205/55 R 16 91W	7 J x 16 ⇒ page 410	37	No	
	Modification	225/45 R 17 91W* ⇒ page 405	7 J x 17* ⇒ page 405	37	No	
	Winter tyres	205/55 R 16 91T/V	6 J x 16 ⇒ page 408	40	Yes	
V6 TDI 2.5l 120 kW Saloon/Estate, front-wheel drive;						
V6 TDI 2.5l 132 kW Saloon/Estate, 4Motion;						
V6 2.8l 140 kW Saloon/Estate, front-wheel drive;						
V6 2.8l 142 kW Saloon/Estate, 4Motion;						

Tyre pressures can be found on the inside of the fuel tank flap or in ⇒ Maintenance ; Booklet 36 .

45.4 Wheel allocation Passat, Passat estate, type 3BG model year 2001 to model year 2005

Explanation of information on wheels ⇒ [page 57](#)



Torque specifications for wheel bolts ⇒ Running gear, axles,
steering - front and four-wheel drive; Rep. gr. 44 ; Fitting wheels
and tyres; Fitting wheels

Pitch circle diameter 112 mm
Number of wheel bolt holes: 5

45.4.1 6 J x 15



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 405](#).

Saloon/estate with front-wheel drive up to and including 110 kW petrol engine and 96 kW and 100 kW diesel engines,

saloon/estate 4Motion up to and including 110 kW petrol engine, 96 kW diesel engine


4B0 601 027 - Wheel and tyre combination ⇒ [page 405](#)



Note


Only permissible with winter tyres.

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	605

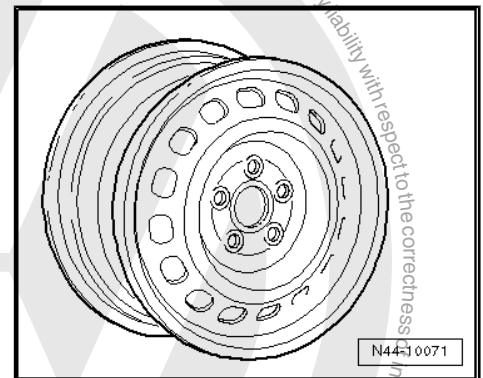


3B0 601 027 D - Wheel and tyre combination ⇒ [page 405](#)

Size:	6 J x 15
Wheel offset in mm:	37
Wheel load in kg:	605

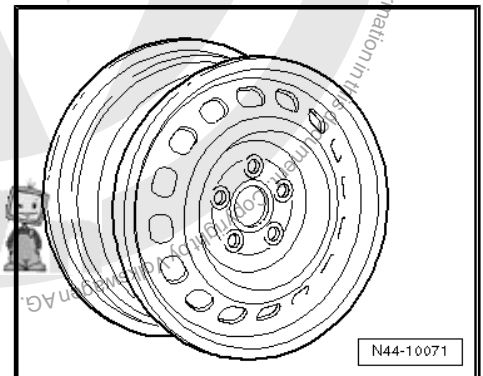

4B0 601 025 J, 4B0 601 025 N - Wheel and tyre combination ⇒ [page 405](#)

Size:	6 J x 15
Wheel offset in mm:	45
Wheel load in kg:	605

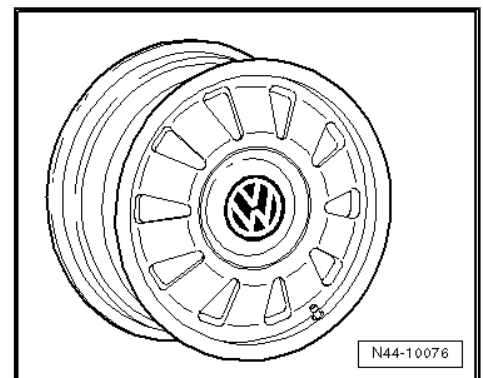



45.4.2 7 J x 15



Caution


Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 405](#) .

Saloon/estate with front-wheel drive up to and including 110 kW petrol engine and 96 kW and 100 kW diesel engines,

saloon/estate 4Motion up to and including 110 kW petrol engine, 96 kW diesel engine


3B0 601 027 E - Wheel and tyre combination ⇒ [page 405](#)

Size:	7 J x 15
Wheel offset in mm:	37
Wheel load in kg:	600

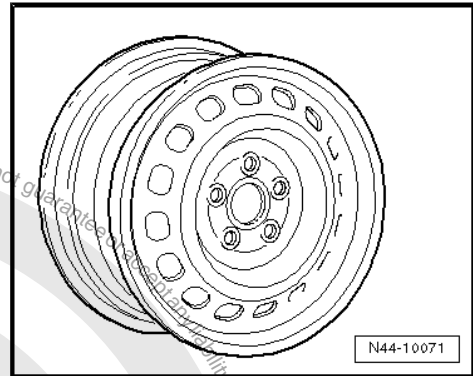

3B0 601 025 K - Wheel and tyre combination ⇒ [page 405](#)


Size:	7 J x 15
Wheel offset in mm:	37
Wheel load in kg:	590

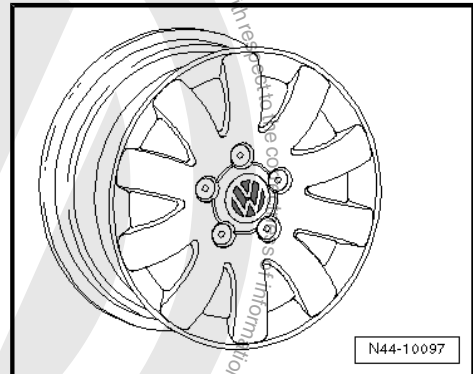

Only for vehicles for export to the USA

3B0 601 025 S- Wheel and tyre combination ⇒ [page 405](#)

Size:	7 J x 15
Wheel offset in mm:	37
Wheel load in kg:	600

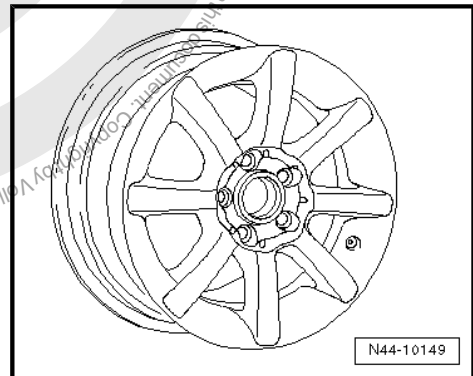

45.4.3 6 J x 16



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 405](#) .




Saloon/Estate with front-wheel drive V6 TDI, V5, V6 petrol engine,

Saloon/Estate, 4Motion V6 TDI, V5, V6 petrol engines

Snow tyres


8D0 601 025 P - Wheel and tyre combination ⇒ [page 406](#)

Size:	6 J x 16
Wheel offset in mm:	40
Wheel load in kg:	615

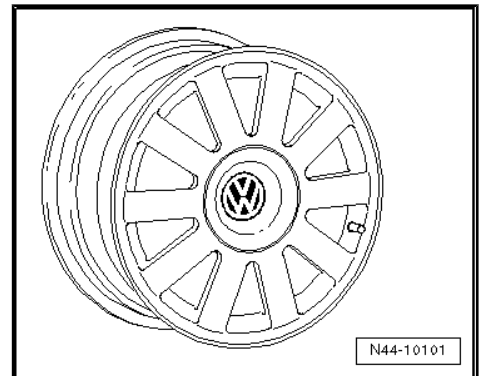

8D0 601 027 A - Wheel and tyre combination ⇒ [page 406](#)

Size:	6 J x 16
Wheel offset in mm:	40
Wheel load in kg:	615

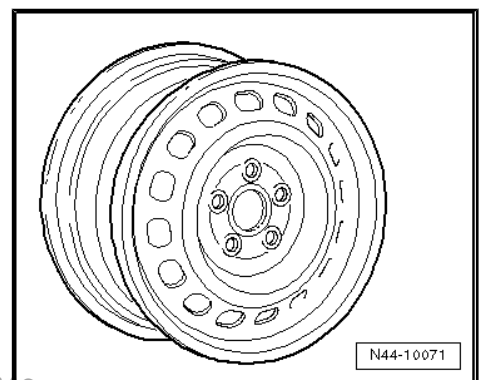

45.4.4 7 J x 16



Caution


Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 405](#).

Saloon/estate with front-wheel drive up to and including 110 kW petrol engine and 96 kW and 100 kW diesel engines,

saloon/estate 4Motion up to and including 110 kW petrol engine, 96 kW diesel engine

3B0 601 027 F - Wheel and tyre combination ⇒ [page 405](#)

Size:	7 J x 16
Wheel offset in mm:	37
Wheel load in kg:	605

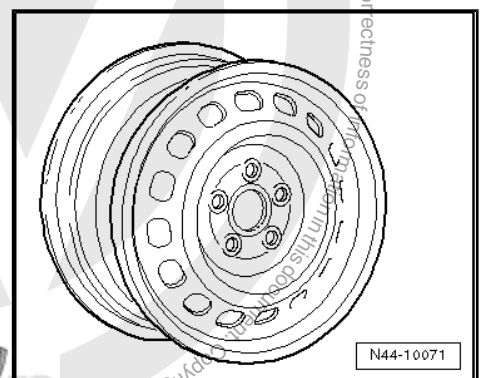




3B0 601 025 L - Wheel and tyre combination ⇒ page 405

Size:	7 J x 16
Wheel offset in mm:	37
Wheel load in kg:	605


Saloon/Estate with front-wheel drive V6 TDI, V5, V6 petrol engines

Saloon/Estate, 4Motion V6 TDI, V5, V6 petrol engines

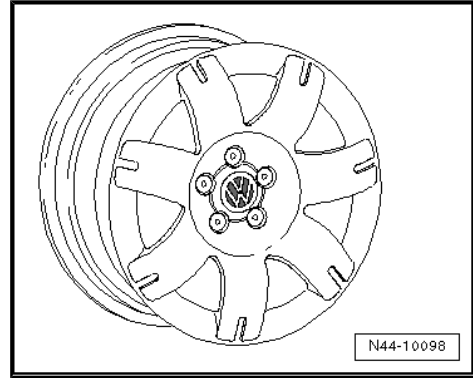


3B0 601 027 F - Wheel and tyre combination ⇒ page 406

Size:	7 J x 16
Wheel offset in mm:	37
Wheel load in kg:	605

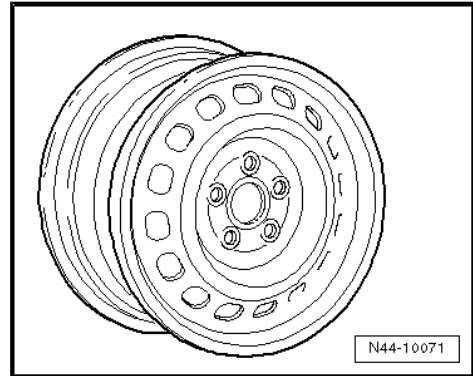

3B0 601 025 L - Wheel and tyre combination ⇒ page 406


Size:	7 J x 16
Wheel offset in mm:	37
Wheel load in kg:	605

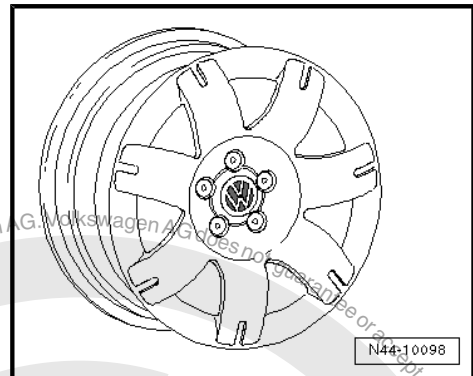

3B0 601 025 AD - Wheel and tyre combination ⇒ page 406

Size:	7 J x 16
Wheel offset in mm:	37
Wheel load in kg:	620

Only for vehicles for export to the USA

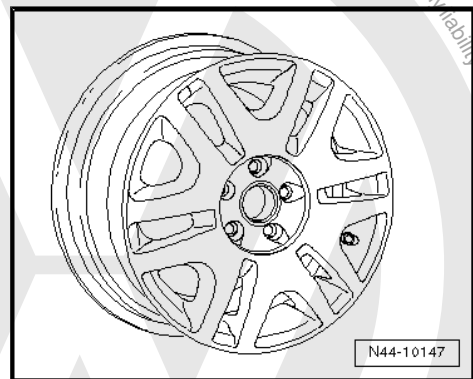


Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by Volkswagen AG. Volkswagen AG does not guarantee the availability of information in this document. Copyright by Volkswagen AG.




3B0 601 025 T - Wheel and tyre combination ⇒ page 405

Size:	7 J x 16
Wheel offset in mm:	37
Wheel load in kg:	620

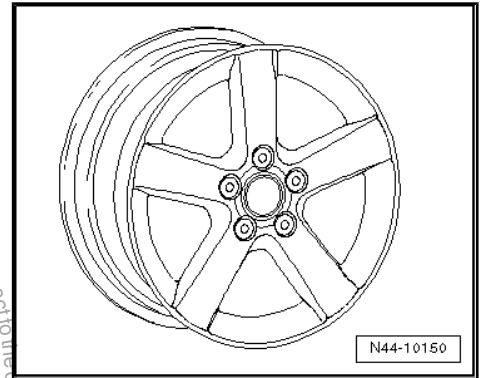

3B0 601 025 AA - Wheel and tyre combination ⇒ page 405

Size:	7 J x 16
Wheel offset in mm:	37
Wheel load in kg:	620

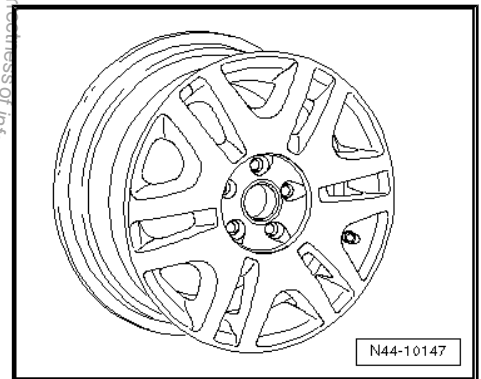

45.4.5 7 J x 17



Note

Not permitted for vehicles with front-wheel drive in conjunction with sports running gear.



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 405 .

Saloon/estate with front-wheel drive up to and including 110 kW petrol engine and 96 kW and 100 kW diesel engines,


Saloon/estate 4Motion up to and including 110 kW petrol engine and 96 kW diesel engine,

Saloon/Estate with front-wheel drive V6 TDI, V5, V6 petrol engine,

Saloon/Estate, 4Motion V6 TDI, V5, V6 petrol engines

3B0 601 025 M - Wheel and tyre combination ⇒ page 405


Size:	7 J x 17
Wheel offset in mm:	37
Wheel load in kg:	605

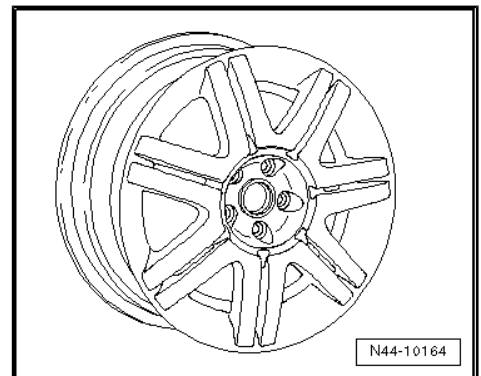



3B0 601 025 P - Wheel and tyre combination ⇒ page 405

Size:	7 J x 17
Wheel offset in mm:	37
Wheel load in kg:	605

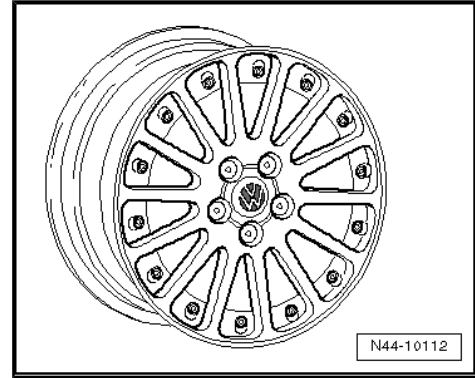

45.5 Passat W8 4Motion, type 3BS model year 2002 to model year 2005

Appendix 2 to Parts Certificate 2523/03

Type Approval No.: e1*98/14*0173*00 to e1*98/14*0173*02

Type Approval No.: e1*2001/116*0173*03 to e1*2001/116*0173*04

Overview

Model engine output	Tyres	Tyre size	Wheel	Offset in mm	Snow chains	Remarks	
4.0l 202 kW Saloon/Estate	Standard tyres	225/45 R 17 91Y	7 ¹ / ₂ J x 17 ⇒ page 414	45	No	Snow chains: Only the listed snow chains are approved! Article No. ⇒ page 413	
	Modification	No changes are permissible apart from the standard wheel and tyre combinations!					* 4Motion vehicles: Snow chains are permitted on the front wheels only.
	Winter tyres	205/50 R 17 93T/H/V* ⇒ page 412	6 J x 17 ⇒ page 413	42	Yes	General information on: <ul style="list-style-type: none"> ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17 Tyre makes recommended by Volkswagen: <ul style="list-style-type: none"> ◆ Summer tyres ⇒ page 478 ◆ All-season tyres ⇒ page 486 ◆ Winter tyres ⇒ page 501 Winter tyres with „V-rating“ ⇒ page 15	

Tyre pressures can be found on the inside of the fuel tank flap or in ⇒ Maintenance ; Booklet 36 .



Approved snow chains, Passat W8

The snow chains listed below are permitted only in conjunction with the wheel and tyre combinations listed next to them!

Chain manufacturer Article No.	Accessories part No.	Tyre size	Wheel	Part No.
Ottinger 100 956	-	205/50 R 17 93T/ H/V ⇒ page 412	6 J x 17 ET 42	3B7 601 025 C
Rud 46022	Z 091 589			

45.6 Wheel allocation Passat W8 4Motion, type 3BS model year 2002 to model year 2005


Explanation of information on wheels ⇒ [page 57](#)

Torque specifications for wheel bolts ⇒ Running gear, axles, steering - front and four-wheel drive; Rep. gr. 44 ; Fitting wheels and tyres; Fitting wheels

Pitch circle diameter 112 mm

Number of wheel bolt holes: 5

45.6.1 7 J x 16




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 412](#) .


Only for vehicles for export to the USA

3B7 601 025 F - Wheel and tyre combination

Size:	7 J x 16
Wheel offset in mm:	45
Wheel load in kg:	630

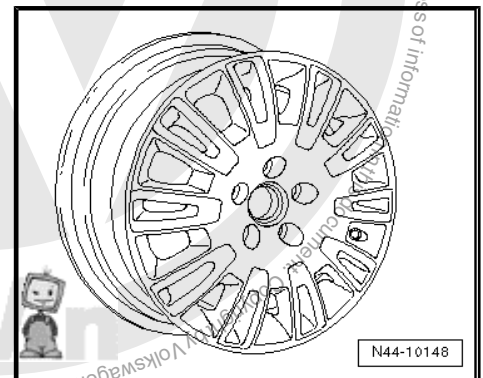

45.6.2 6 J x 17



Caution


Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 412](#) .



For winter tyres

3B7 601 025 C - Wheel and tyre combination ⇒ page 412

Size:	6 J x 17
Wheel offset in mm:	42
Wheel load in kg:	620

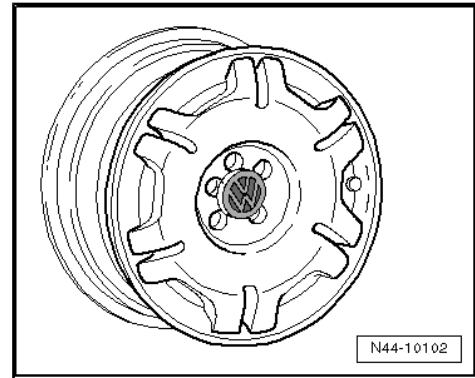

45.6.3 7 1/2 J x 17




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 412 .


3B7 601 025 A - Wheel and tyre combination ⇒ page 412

Size:	7 1/2 J x 17
Wheel offset in mm:	45
Wheel load in kg:	630

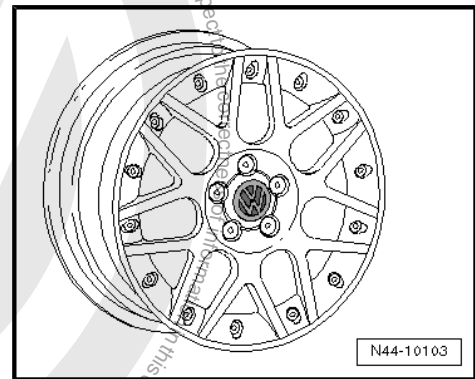

3B7 601 025 D - Wheel and tyre combination ⇒ page 412

Size:	7 1/2 J x 17
Wheel offset in mm:	45
Wheel load in kg:	660

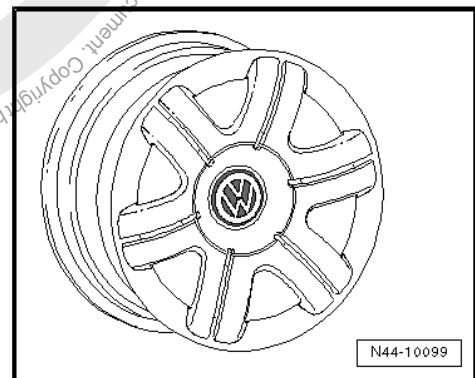

45.7 Passat Protect, type 3BL model year 2002 to model year 2005

Appendix 2 to Parts Certificate 2523/03



Type approval No.: e1*98/14PD0162*00 to e1*98/14PD0162*03

Type approval No.: e1*2001/116*0162*04

Overview

Model engine output	Tyres	Tyre size	Wheel	Off-set in mm	Snow chains	Remarks
2.8l 142 kW 1.9l 96 kW TDI	Standard tyres	205/55 R 16 94W reinforced/XL	7 J x 16 ⇒ page 416	45	No	Snow chains: Only the listed snow chains are approved! Article No. ⇒ page 415
	Modification	215/55 R 16 97Y reinforced/XL	7 J x 16 ⇒ page 416	45	No	* 4Motion vehicles: Snow chains are permitted on the front wheels only.
	Winter tyres	205/55 R 16 94T/H/V* ⇒ page 415 reinforced/XL	6 J x 16 ⇒ page 416	45	Yes	General information on: ♦ Winter tyres ⇒ page 14 ♦ Snow chains ⇒ page 17
4.0l 202 kW	Standard tyres	215/55 R 16 97Y reinforced/XL	7 J x 16 ⇒ page 416	45	No	Tyre makes recommended by Volkswagen:
	Modification	No changes are permissible apart from the standard wheel and tyre combinations!				♦ Summer tyres ⇒ page 478 ♦ Winter tyres ⇒ page 501
	Winter tyres	205/55 R 16 94T/H/V* ⇒ page 415 reinforced/XL	6 J x 16 ⇒ page 416	45	Yes	Winter tyres with „V-rating“ ⇒ page 15

Tyre pressures can be found on the inside of the fuel tank flap or in ⇒ Maintenance ; Booklet 36 .

Approved snow chains, Passat Protect

The snow chains listed below are permitted only in conjunction with the wheel and tyre combinations listed next to them!

Chain manufacturer Article No.	Accessories part No.	Tyre size	Wheel	Part No.
Rud	000 091 386 K	205/55 R 16 94T/H/V* ⇒ page 415 reinforced/XL	6 J x 16 ET 45	3B7 601 025 B

45.8 Wheel allocation Passat Protect, type 3BL model year 2002 to model year 2005

Explanation of information on wheels ⇒ [page 57](#)

Wheel bolt torque settings ⇒ Running gear, axles, steering - Protect; Rep. gr. 44 ; Wheel bolt torque settings

Pitch circle diameter 112 mm



Number of wheel bolt holes: 5

45.8.1 6 J x 16



Caution


Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 415](#).

For winter tyres

Only for vehicles to maximum permissible axle load of 1320 kg

3B7 601 025 B - Wheel and tyre combination ⇒ [page 415](#)

Size:	6 J x 16
Wheel offset in mm:	45
Wheel load in kg:	660

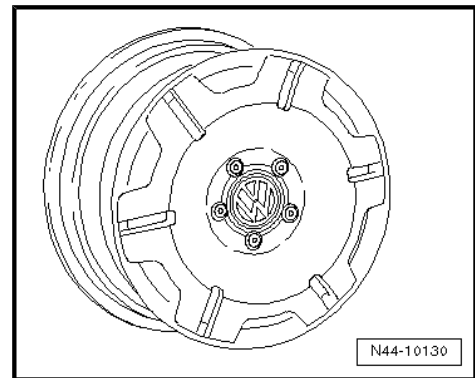

45.8.2 7 J x 16




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 415](#).

4B0 601 025 T - Wheel and tyre combination ⇒ [page 415](#)


Size:	7 J x 16
Wheel offset in mm:	45
Wheel load in kg:	670

Only for vehicles to maximum permissible axle load of 1320 kg

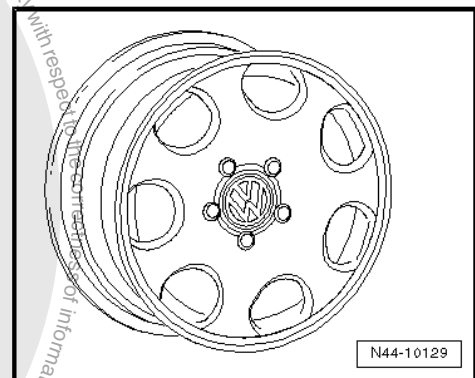

3B7 601 025 - Wheel and tyre combination ⇒ [page 415](#)

Size:	7 J x 16
Wheel offset in mm:	45
Wheel load in kg:	660

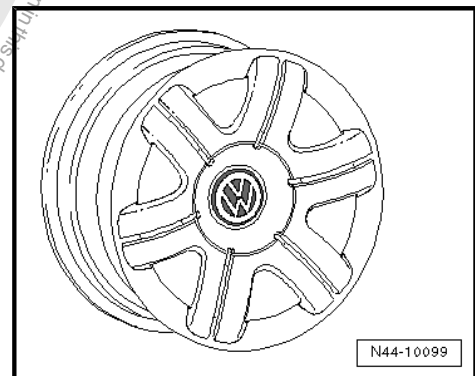



46 Sharan from model year 1996

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of only genuine Volkswagen spare parts. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

46.1 Sharan, Sharan Syncro, type 7M model year 1996 to model year 2000

Attachment to parts certificate 3533/09

The parts certificate can be found on the Volkswagen ServiceNet under Accessories/Tyres, Wheels and Tyres, Wheels and Tyres Guide.

Type approval number: e1*93/81*0023*00 to e1*93/81*0023*03

Type approval number: e1*95/54*0023*04 to e1*95/54*0023*09

Type approval number: e1*98/14*0023*10 to e1*98/14*0023*12

Overview



WARNING

Wheel bolts and/or wheels of vehicles from model year 2001 are not permitted! Distinguishing features ⇒ [page 68](#).



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
1.9l 66 kW, 81 kW TDI 85 kW petrol engine CL, GL Carat	Standard tyres	195/65 R 15 95T reinforced/XL	6 J x 15 ⇒ page 420	55	Yes	Conversion to 7 J x 15 wheels: For vehicles with CL or GL equipment to vehicle No. T0050000, track rod joints 7M0 422 817 A/ 7M0 422 818 A must be installed.
	Modification	195/65 R 15 95T reinforced/XL	7 J x 15 ⇒ page 420	59	No	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17 Tyre makes recommended by Volkswagen: ◆ Summer tyres ⇒ page 478 ◆ Winter tyres ⇒ page 502 * 215/55 R 16 93H: Tyres are not permissible on Syncro and 1.9l 85 kW TDI vehicles!
		205/60 R 15 95H reinforced/XL	6 J x 15 ⇒ page 420	55	Yes	
		205/60 R 15 95H reinforced/XL	7 J x 15 ⇒ page 420	59	No	
		215/60 R 15 95H	6 J x 15 ⇒ page 420	55	No	
		215/60 R 15 95H	7 J x 15 ⇒ page 420	59	No	
		215/55 R 16 93H* ⇒ page 418	7 J x 16 ⇒ page 421	59	No	
	215/55 R 16 95H** ⇒ page 418 reinforced/XL	7 J x 16 ⇒ page 421	59	No		
Winter tyres	195/65 R 15 95Q/T reinforced/XL	6 J x 15 ⇒ page 420	55	Yes		
1.8l 110 kW; 128 kW VR6 GL, Carat; 128 kW VR6 Syncro GL, Carat	Standard tyres	205/60 R 15 95H reinforced/XL	6 J x 15 ⇒ page 420	55	Yes	** Tyre pressure for 1.9l 85 kW TDI ⇒ page 420
	Modification	205/60 R 15 95H reinforced/XL	7 J x 15 ⇒ page 420	59	No	
		215/60 R 15 95H	6 J x 15 ⇒ page 420	55	No	
		215/60 R 15 95H	7 J x 15 ⇒ page 420	59	No	
		215/55 R 16 93H	7 J x 16 ⇒ page 421	59	No	



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
	Winter tyres	195/65 R 15 95Q/T reinforced/XL	6 J x 15 ⇒ page 420	55	Yes	
All vehicles with Carat equipment	Standard tyres	215/60 R 15 95H	7 J x 15 ⇒ page 420	59	No	
	Modification	215/55 R 16 93H* ⇒ page 418	7 J x 16 ⇒ page 421	59	No	
		215/55 R 16 95H** ⇒ page 418 reinforced/XL	7 J x 16 ⇒ page 421	59	No	
		205/60 R 15 95H reinforced/XL	6 J x 15 ⇒ page 420	55	Yes	
		205/60 R 15 95H reinforced/XL	7 J x 15 ⇒ page 420	59	No	
		215/60 R 15 95H	6 J x 15 ⇒ page 420	55	No	
	Winter tyres	195/65 R 15 95Q/T reinforced/XL	6 J x 15 ⇒ page 420	55	Yes	
All vehicles with Trendline/High-line equipment	Standard tyres	215/55 R 16 95H reinforced/XL	7 J x 16 ⇒ page 421	59	No	
	Modification	215/55 R 16 93H* ⇒ page 418	7 J x 16 ⇒ page 421	59	No	
		215/55 R 16 95H** ⇒ page 418 reinforced/XL	7 J x 16 ⇒ page 421	59	No	
		205/60 R 15 95H reinforced/XL	6 J x 15 ⇒ page 420	55	Yes	
		205/60 R 15 95H reinforced/XL	7 J x 15 ⇒ page 420	59	No	
		215/60 R 15 95H	6 J x 15 ⇒ page 420	55	No	
	215/60 R 15 95H	7 J x 15 ⇒ page 420	59	No		
Winter tyres	195/65 R 15 95Q/T reinforced/XL	6 J x 15 ⇒ page 420	55	Yes		

Tyre inflation pressures are located on a sticker on inside of fuel tank flap or in ⇒ Maintenance ; Booklet ; Check tyres: condition, profile, inflation pressure, depth of tread .

Exceptions to this are the 215/55 R 16 95H tyres, see "Remarks" column ⇒ [page 418](#)



Tyre pressure for 1.9l 85 kW TDI:

Tyre pressure M + S:	
Part load front:	2,9
Part load rear:	2,5
Full load front:	3,1
Full load rear:	3,3


46.2 Wheel allocation for Sharan, Sharan Syncro. Type 7M model year 1996 to model year 2000

Explanation of information on wheels ⇒ [page 57](#)

Wheel bolt torque settings ⇒ Running gear, axles, steering - front and four-wheel drive; Rep. gr. 44 ; Wheel bolt torque settings

Pitch circle diameter: 112 mm
Number of wheel bolt holes: 5

46.2.1 6 J x 15




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 417](#).


All models with front-wheel drive, all Syncro models

7M0 601 027 A - Wheel and tyre combination ⇒ [page 418](#)

Size:	6 J x 15
Wheel offset in mm:	55
Wheel load in kg:	690

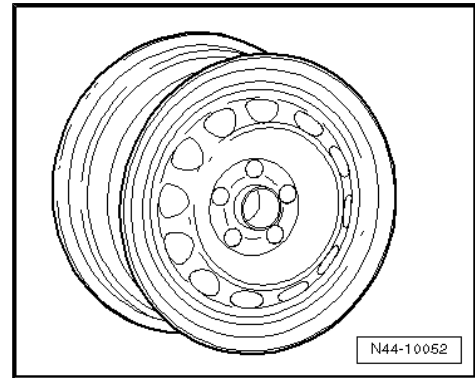

46.2.2 7 J x 15



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 417](#).

i Note


Snow chains are not permitted with 7 J x 15 or 7 J x 16 wheels. Snow chains are permitted only on 195/65 R 15 and 205/60 R 15 tyres with 6 J x 15 offset 55 wheels. The track rod joints 7M0 422 817 A/7M0 422 818 A must be installed on vehicles with CL or GL equipment through vehicle No. T005000.



All models with front-wheel drive, all Syncro models


7M0 601 025, 7M0 601 025 C - Wheel and tyre combination
⇒ [page 418](#)

Size:	7 J x 15
Wheel offset in mm:	59
Wheel load in kg:	690

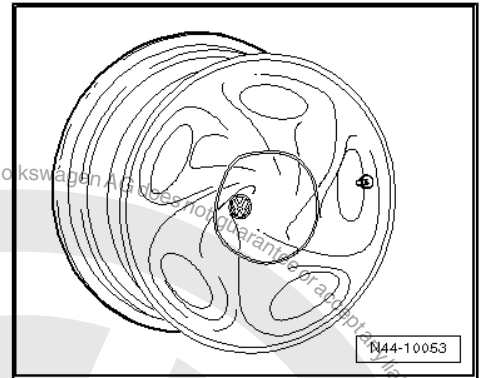

7M0 601,025 F - Wheel and tyre combination ⇒ [page 418](#)

Size:	7 J x 15
Wheel offset in mm:	59
Wheel load in kg:	690

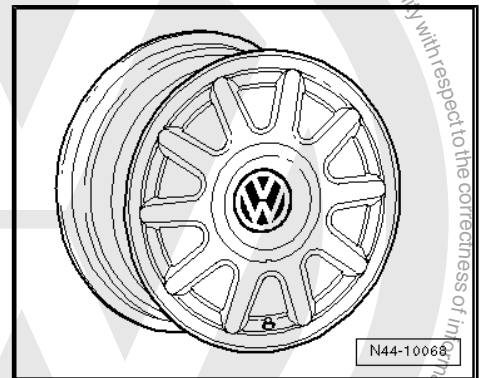

46.2.3 7 J x 16

⚠ Caution
Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 417](#).


i Note

Snow chains are not permitted with 7 J x 15 or 7 J x 16 wheels. Snow chains are permitted only on 195/65 R 15 and 205/60 R 15 tyres with 6 J x 15 offset 55 wheels. The track rod joints 7M0 422 817 A/7M0 422 818 A must be installed on vehicles with CL or GL equipment through vehicle No. T005000.

All models with front-wheel drive, all Syncro models

7M0 601 025 E - Wheel and tyre combination ⇒ [page 418](#)


Size:	7 J x 16
Wheel offset in mm:	59
Wheel load in kg:	690

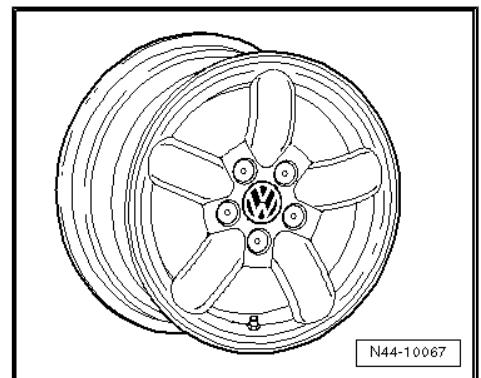



7M0 601 025 G - Wheel and tyre combination ⇒ [page 418](#)

Size:	7 J x 16
Wheel offset in mm:	59
Wheel load in kg:	690

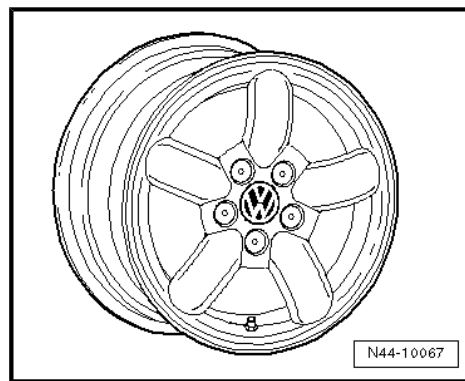

46.3 Sharan, Sharan 4Motion, type 7M model year 2001

Attachment to parts certificate 3533/09

The parts certificate can be found on the Volkswagen ServiceNet under Accessories/Tyres, Wheels and Tyres, Wheels and Tyres Guide.

Type approval number: e1*98/14*0023*13 to e1*98/14*0023*16

Overview

WARNING

Sharan vehicles from model year 2001 onwards have modified wheel bolts and wheels. Wheel bolts and/or wheels from vehicles to model year 2000 are not permitted! Distinguishing features ⇒ [page 68](#) .

Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
2.0l 85 kW; 1.9l 66 kW TDI	Standard tyres	195/65 R 15 95T reinforced/XL	6 J x 15 ⇒ page 424	55	Yes	General information on: ♦ Winter tyres ⇒ page 14 ♦ Snow chains ⇒ page 17 Tyre makes recommended by Volkswagen: ♦ Summer tyres ⇒ page 478 ♦ Winter tyres ⇒ page 502
	Modification	205/60 R 15 95H reinforced/XL	6 J x 15 ⇒ page 424	55	Yes	
		215/60 R 15 95H	7 J x 15 ⇒ page 424	59	No	
		215/55 R 16 95H reinforced/XL	7 J x 16 ⇒ page 426	59	No	
	Winter tyres	195/65 R 15 95Q/T reinforced/XL	6 J x 15 ⇒ page 424	55	Yes	
		195/60 R 16 C 99/97Q/T	6 J x 16 ⇒ page 425	53	Yes	
1.9l 85 kW TDI front-wheel drive	Standard tyres	205/60 R 15 95H reinforced/XL	6 J x 15 ⇒ page 424	55	Yes	



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
	Modification	195/65 R 15 95T reinforced/XL	6 J x 15 ⇒ page 424	55	Yes	
		215/60 R 15 95H	7 J x 15 ⇒ page 424	59	No	
		215/55 R 16 95H reinforced/XL	7 J x 16 ⇒ page 426	59	No	
	Winter tyres	195/65 R 15 95Q/T reinforced/XL	6 J x 15 ⇒ page 424	55	Yes	
		195/60 R 16 C 99/97Q/T	6 J x 16 ⇒ page 425	53	Yes	
	1.9l 85 kW TDI 4Motion	Standard tyres	215/55 R 16 95H reinforced/XL	6 J x 16 ⇒ page 425	53	
215/55 R 16 95H reinforced/XL			7 J x 16 ⇒ page 426	59	No	
Modification		No changes are permissible apart from the standard wheel and tyre combinations!				
Winter tyres		195/60 R 16 C 99/97Q/T	6 J x 16 ⇒ page 425	53	Yes	
1.8l 110 kW Turbo	Standard tyres	205/60 R 15 95H reinforced/XL	6 J x 15 ⇒ page 424	55	Yes	
	Modification	215/60 R 15 95H	7 J x 15 ⇒ page 424	59	No	
		215/55 R 16 95H reinforced/XL	7 J x 16 ⇒ page 426	59	No	
	Winter tyres	195/65 R 15 95Q/T reinforced/XL	6 J x 15 ⇒ page 424	55	Yes	
		195/60 R 16 C 99/97Q/T	6 J x 16 ⇒ page 425	53	Yes	
VR6 150 kW front-wheel drive and 4Motion	Standard tyres	215/55 R 16 95W reinforced/XL	6 J x 16 ⇒ page 425	53	No	
		215/55 R 16 95W reinforced/XL	7 J x 16 ⇒ page 426	59	No	
	Modification	No changes are permissible apart from the standard wheel and tyre combinations!				
	Winter tyres	195/60 R 16 C 99/97Q/T	6 J x 16 ⇒ page 425	53	Yes	

Tyre inflation pressures are located on a sticker on inside of fuel tank flap or in ⇒ Maintenance ; Booklet ; Check tyres: condition, profile, inflation pressure, depth of tread .



46.4 Wheel allocation for Sharan, Sharan 4Motion, type 7M model year 2001

Explanation of information on wheels ⇒ [page 57](#)

Wheel bolt torque settings ⇒ Running gear, axles, steering - front and four-wheel drive; Rep. gr. 44 ; Wheel bolt torque settings

Pitch circle diameter: 112 mm
Number of wheel bolt holes: 5

46.4.1 6 J x 15




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 422](#) .

Models through 110 kW with front-wheel drive

7M0 601 027 F - Wheel and tyre combination ⇒ [page 422](#)

Size:	6 J x 15
Wheel offset in mm:	55
Wheel load in kg:	690

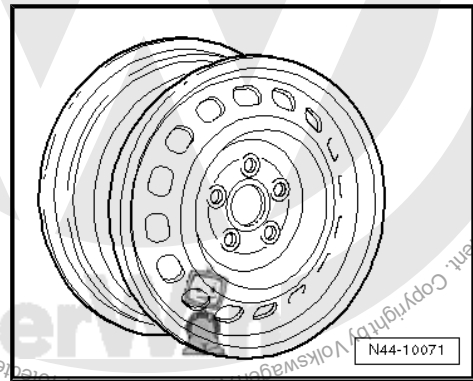

46.4.2 7 J x 15



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 422](#) .

Models through 110 kW with front-wheel drive




Note

Snow chains are not permitted on 7 J x 15 or 7 J x 16 wheels.

7M3 601 025 B - Wheel and tyre combination ⇒ [page 422](#)

Size:	7 J x 15
Wheel offset in mm:	59
Wheel load in kg:	690

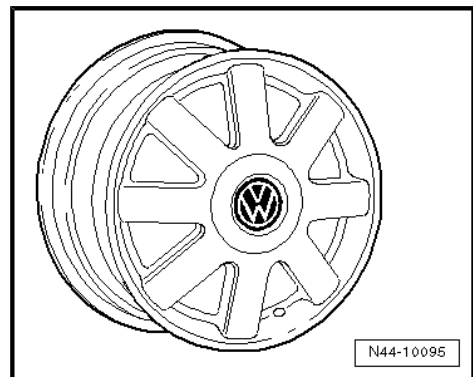



46.4.3 6 J x 16



Caution


Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table => [page 422](#) .

Models through 110 kW with front-wheel drive

7M3 601,027 E - Wheel and tyre combination => [page 422](#)

Size:	6 J x 16
Wheel offset in mm:	53
Wheel load in kg:	730


1.9l 85 kW TDI 4Motion, VR6 150 kW front-wheel drive and 4Motion

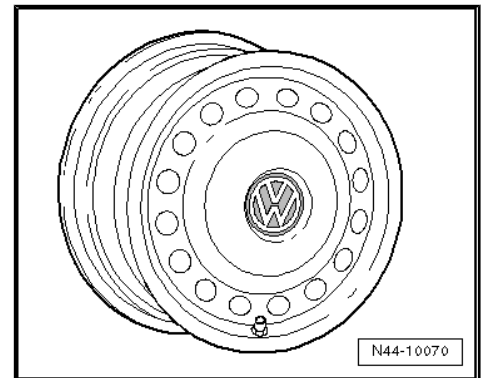

7M3 601,027 D - Wheel and tyre combination => [page 423](#)


For M + S tyres

Size:	6 J x 16
Wheel offset in mm:	53
Wheel load in kg:	690

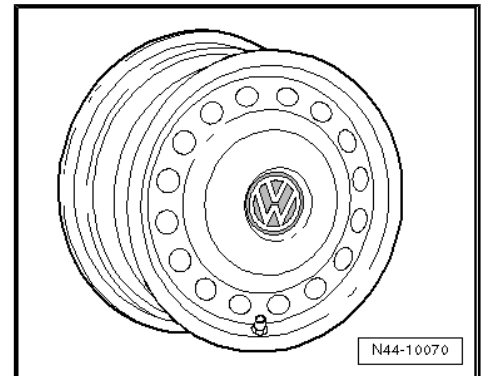

7M3 601,027 E - Wheel and tyre combination => [page 423](#)

Size:	6 J x 16
Wheel offset in mm:	53
Wheel load in kg:	710

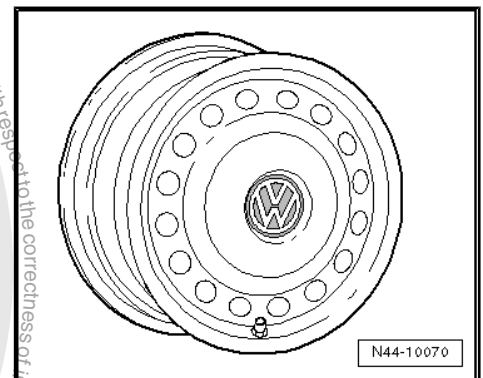


Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by Volkswagen AG. Volkswagen AG does not guarantee or accept any liability with respect to the correctness of the information in this document. Copyright by Volkswagen AG.



7M3 601,027 F - Wheel and tyre combination ⇒ page 423

Size:	6 J x 16
Wheel offset in mm:	53
Wheel load in kg:	710

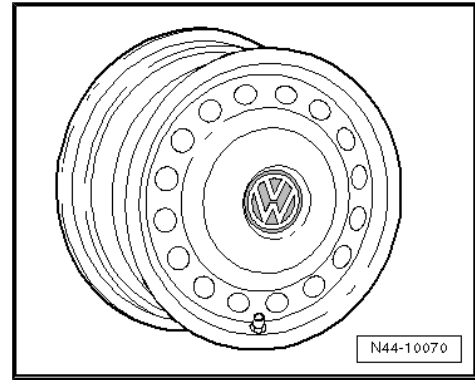

46.4.4 7 J x 16



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 422 .

Models through 110 kW with front-wheel drive



Note

Snow chains are not permitted on 7 J x 15 or 7 J x 16 wheels.

7M3 601 025 A - Wheel and tyre combination ⇒ page 422


Size:	7 J x 16
Wheel offset in mm:	59
Wheel load in kg:	710

1.9l 85 kW TDI 4Motion, VR6 150 kW front-wheel drive and 4Motion




Note

Snow chains are not permitted on 7 J x 15 or 7 J x 16 wheels.

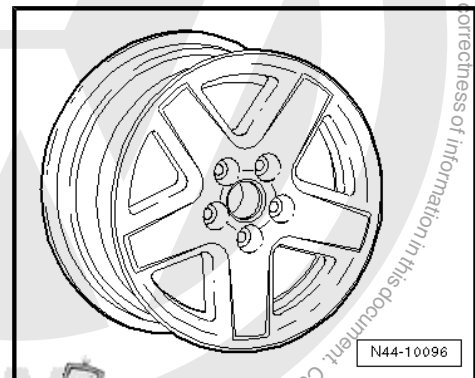

7M0 601 027 J - Wheel and tyre combination ⇒ page 423


Size:	7 J x 16
Wheel offset in mm:	59
Wheel load in kg:	710

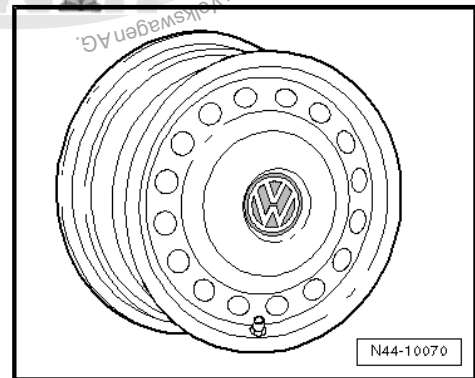



7M3 601 025 A - Wheel and tyre combination ⇒ page 423

Size:	7 J x 16
Wheel offset in mm:	59
Wheel load in kg:	710

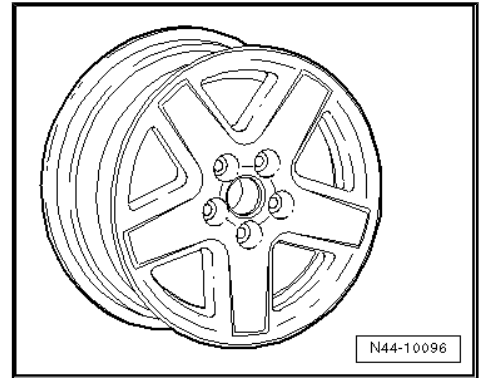

N44-10096


7M3 601 025 D - Wheel and tyre combination ⇒ page 423



Note

Not permitted for vehicles with 16" brakes.


Size:	7 J x 16
Wheel offset in mm:	59
Wheel load in kg:	690

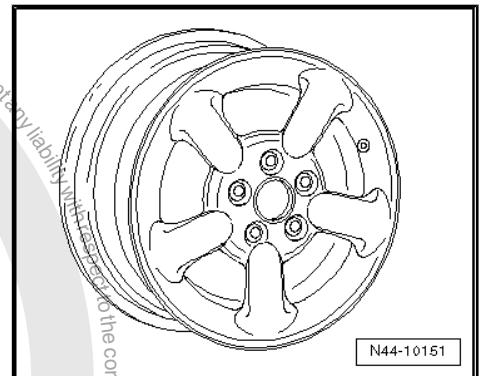

N44-10151

7M3 601 025 F - Wheel and tyre combination ⇒ page 423


Size:	7 J x 16
Wheel offset in mm:	59
Wheel load in kg:	730

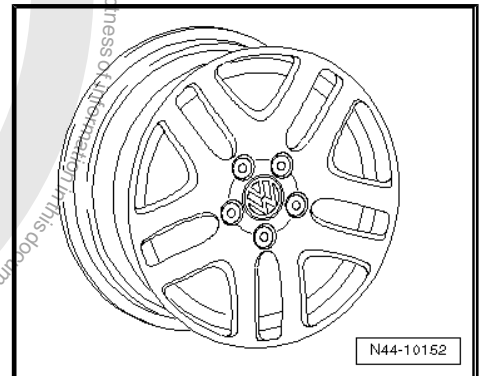

N44-10152

7M3 601 025 G - Wheel and tyre combination ⇒ page 423

Size:	7 J x 16
Wheel offset in mm:	59
Wheel load in kg:	730

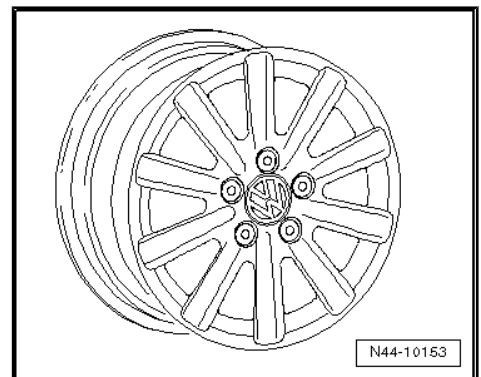


N44-10153



7M3 601 025 H - Wheel and tyre combination ⇒ [page 423](#)

Size:	7 J x 16
Wheel offset in mm:	59
Wheel load in kg:	730

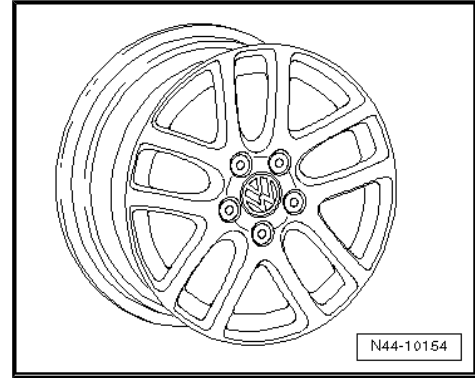

46.5 Sharan, Sharan 4Motion, type 7M model year 2002 to model year 2010

Attachment to parts certificate 3533/09

The parts certificate can be found on the Volkswagen ServiceNet under Accessories/Tyres, Wheels and Tyres, Wheels and Tyres Guide.

Type approval number: e1*98/14*0023*17 to e1*98/14*0023*20

Type approval number: e1*2001/116*0023*21 to e1*2001/116*0023*36

Overview

WARNING

Sharan vehicles from model year 2001 onwards have modified wheel bolts and wheels. Wheel bolts and/or wheels from vehicles to model year 2000 are not permitted! Distinguishing features ⇒ [page 68](#)

Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
2.0l 85 kW; 1.8l 110 kW turbo petrol engines 1.9l 66 kW TDI; 1.9l 85 kW TDI; front-wheel drive and 4Motion 1.9l 96 kW TDI front-wheel drive; 1.9l 110 kW TDI front-wheel drive; 2.0l 100 kW TDI front-wheel drive; 2.0l 103 kW TDI front-wheel drive; diesel engines	Standard tyres	195/60 R 16 C 99/97H	6 J x 16 ⇒ page 430	53	Yes	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17
	Modification	205/55 R 16 C 98/96H	6 J x 16 ⇒ page 430	53	No	
		215/55 R 16 95H reinforced/XL	6 J x 16 ⇒ page 430	53	No	
		215/55 R 16 95H reinforced/XL	7 J x 16 ⇒ page 430	59	No	Tyre makes recommended by Volkswagen:



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
		225/45 R 17 94W reinforced/XL	7 J x 17 ⇒ page 432	54	No	♦ Summer tyres ⇒ page 478 ♦ Winter tyres ⇒ page 502
	Winter tyres	195/60 R 16 C 99/97Q/T	6 J x 16 ⇒ page 430	53	Yes	
		205/55 R 16 94Q/T/H/V reinforced/XL * ⇒ page 429 *** ⇒ page 429	6 J x 16 ⇒ page 430	53	No	* Winter tyres with „V-rating“ ⇒ page 15
VR6 150 kW front-wheel drive and 4Motion	Standard tyres	215/55 R 16 95W reinforced/XL	6 J x 16 ⇒ page 430	53	No	** Tyre pressure for VR6 150 kW ⇒ page 429
		215/55 R 16 95W reinforced/XL	7 J x 16 ⇒ page 430	59	No	*** Caution: A supplement must be added to the vehicle documents!
	Modification	225/45 R 17 94W reinforced/XL	7 J x 17 ⇒ page 432	54	No	
	Winter tyres	195/60 R 16 C 99/97Q/T	6 J x 16 ⇒ page 430	53	Yes	
		205/55 R 16 94Q/T/H/V reinforced/XL * ⇒ page 429 ** ⇒ page 429 *** ⇒ page 429	6 J x 16 ⇒ page 430	53	No	

Tyre inflation pressures are located on a sticker on inside of fuel tank flap or in ⇒ Maintenance ; Booklet ; Check tyres: condition, profile, inflation pressure, depth of tread .

Tyre pressure for VR6 150 kW:

Tyre pressure M + S:	
Part load front:	3.1
Part load rear:	2.8
Full load front:	3.2
Full load rear:	3.4

46.6 Wheel allocation for Sharan, Sharan 4Motion, type 7M model year 2002 to model year 2010

Explanation of information on wheels ⇒ [page 57](#)

Wheel bolt torque settings ⇒ Running gear, axles, steering - front and four-wheel drive; Rep. gr. 44 ; Wheel bolt torque settings

Pitch circle diameter: 112 mm
Number of wheel bolt holes: 5



46.6.1 6 J x 16



Caution


Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table => [page 428](#) .

7M3 601,027 D - Wheel and tyre combination => [page 428](#)

For M + S tyres


Only for vehicles to maximum permissible axle load of 1,380 kg

Size:	6 J x 16
Wheel offset in mm:	53
Wheel load in kg:	690

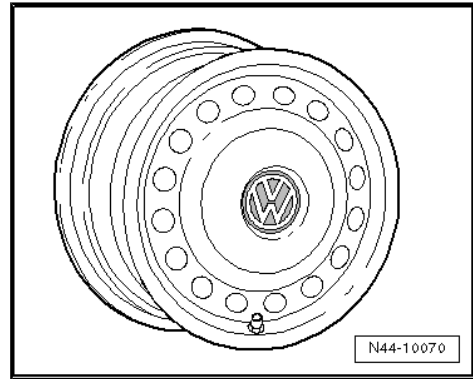


7M3 601,027 E - Wheel and tyre combination => [page 428](#)

Size:	6 J x 16
Wheel offset in mm:	53
Wheel load in kg:	730

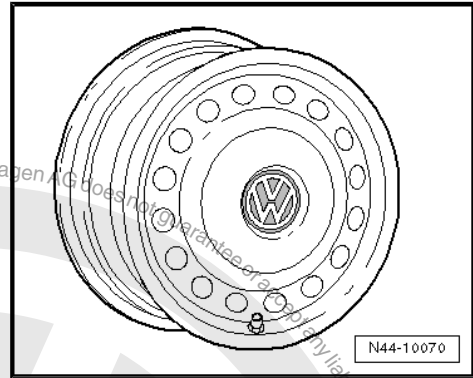

7M3 601,027 F - Wheel and tyre combination => [page 428](#)

Size:	6 J x 16
Wheel offset in mm:	53
Wheel load in kg:	710

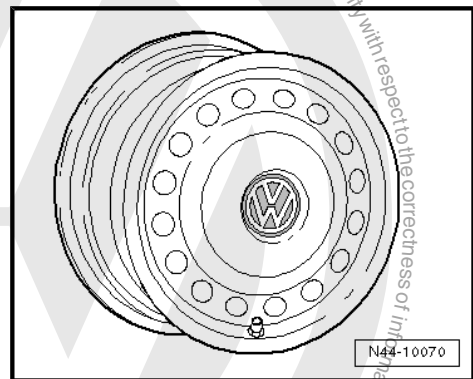

46.6.2 7 J x 16



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table => [page 428](#) .




Note

No snow chains are permitted on 7 J x 16 wheels.




7M0 601 027 J - Wheel and tyre combination ⇒ page 428

Size:	7 J x 16
Wheel offset in mm:	59
Wheel load in kg:	710

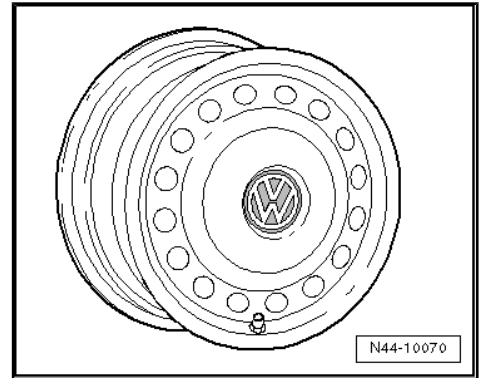


7M3 601 025 A - Wheel and tyre combination ⇒ page 428

Size:	7 J x 16
Wheel offset in mm:	59
Wheel load in kg:	710

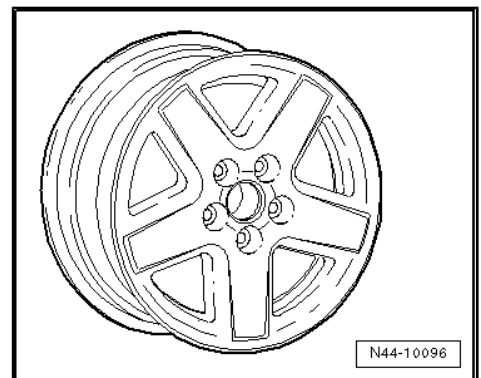

7M3 601 025 E - Wheel and tyre combination ⇒ page 428

Size:	7 J x 16
Wheel offset in mm:	59
Wheel load in kg:	730

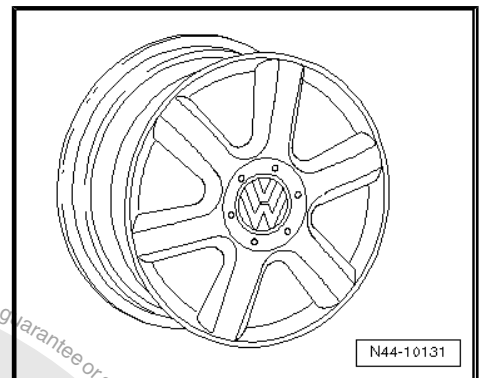


7M3 601 025 D - Wheel and tyre combination ⇒ page 428

i Note

Not permitted for vehicles with 16" brakes.

Only for vehicles to maximum permissible axle load of 1,380 kg

Size:	7 J x 16
Wheel offset in mm:	59
Wheel load in kg:	690

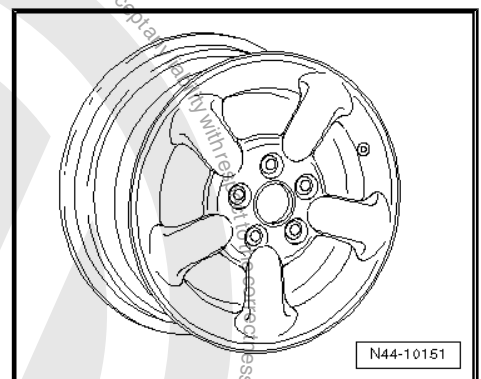


Protected by copyright. Copying for private or commercial purposes without the express written permission of Volkswagen AG. Volkswagen AG does not guarantee or accept responsibility for the accuracy of information in this document.






7M3 601 025 F - Wheel and tyre combination ⇒ page 428

Size:	7 J x 16
Wheel offset in mm:	59
Wheel load in kg:	730

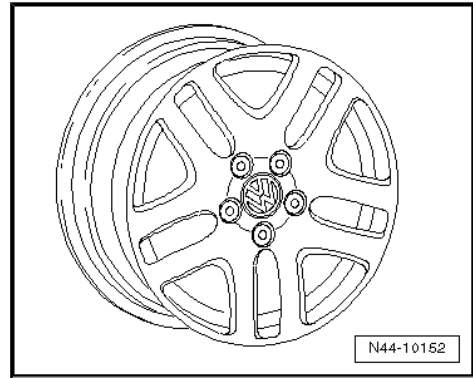


7M3 601 025 G - Wheel and tyre combination ⇒ page 428

Size:	7 J x 16
Wheel offset in mm:	59
Wheel load in kg:	730

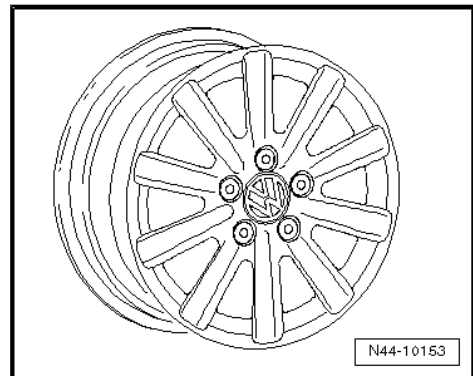

7M3 601 025 H - Wheel and tyre combination ⇒ page 428

Size:	7 J x 16
Wheel offset in mm:	59
Wheel load in kg:	730

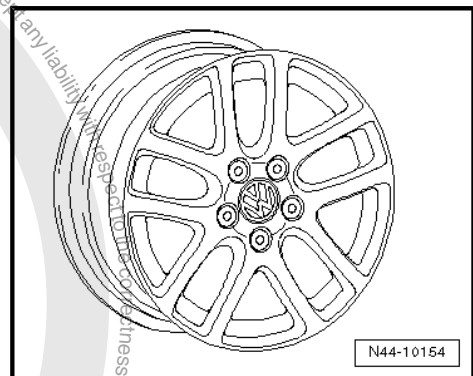

46.6.3 7 J x 17



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 428 .



Note


No snow chains are permitted on 7 J x 17 wheels.



7M3 601 025 J - Wheel and tyre combination ⇒ page 429

Only for vehicles to maximum permissible axle load of 1,380 kg


Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	690

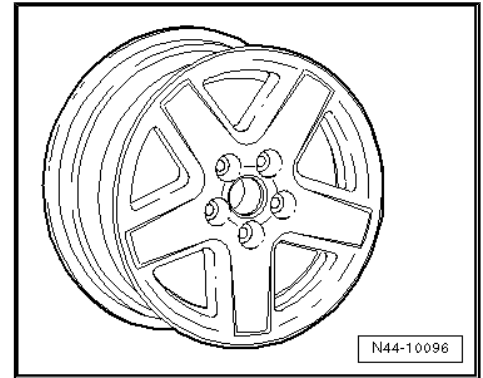

7M3 601 025 K - Wheel and tyre combination ⇒ page 429

Only for vehicles to maximum permissible axle load of 1,380 kg


Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	690

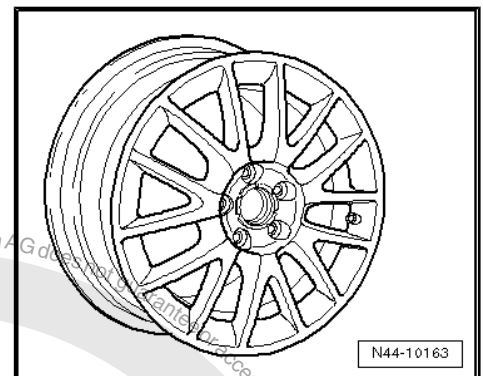

7M3 601 025 L - Wheel and tyre combination ⇒ page 429


Only for vehicles to maximum permissible axle load of 1,380 kg

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	690

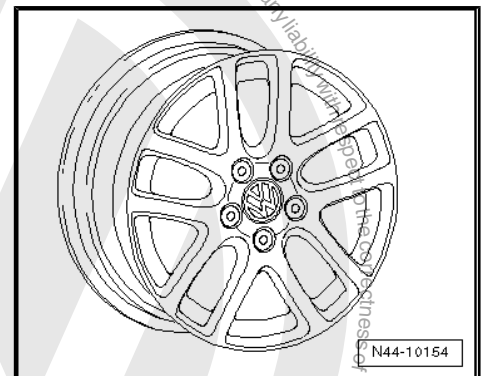

7M3 601 025 M - Wheel and tyre combination ⇒ page 429

Size:	7 J x 17
Wheel offset in mm:	54
Wheel load in kg:	730

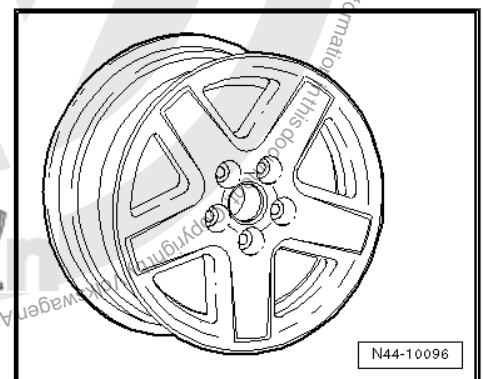



47 Sharan BlueMotion from model year 2009

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of only genuine Volkswagen spare parts. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

47.1 Sharan BlueMotion, type 7M model year 2009 to model year 2010

Attachment to parts certificate 3533/09

The parts certificate can be found on the Volkswagen ServiceNet under Accessories/Tyres, Wheels and Tyres, Wheels and Tyres Guide.

Type approval number: e1*2001/116*0023*33 to e1*2001/116*0023*36

Overview



WARNING

Sharan vehicles from model year 2001 onwards have modified wheel bolts and wheels. Wheel bolts and/or wheels from vehicles to model year 2000 are not permitted! Distinguishing features ⇒ [page 68](#)



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
2.0l 103 kW TDI diesel engine	Standard tyres	195/60 R 16 C 99/97H	6 J x 16 ⇒ page 435	53	Yes	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17
	Modification	No changes are permissible apart from the standard wheel and tyre combinations!				Tyre makes recommended by Volkswagen:
	Winter tyres	195/60 R 16 C 99/97Q/T	6 J x 16 ⇒ page 435	53	Yes	◆ Summer tyres ⇒ page 479 ◆ Winter tyres ⇒ page 502

Tyre inflation pressures are located on a sticker on inside of fuel tank flap or in ⇒ Maintenance ; Booklet ; Check tyres: condition, profile, inflation pressure, depth of tread .

47.2 Wheel allocation for Sharan BlueMotion, type 7M model year 2009 to model year 2010

Explanation of information on wheels ⇒ [page 57](#)

Wheel bolt torque settings ⇒ Running gear, axles, steering - front and four-wheel drive; Rep. gr. 44 ; Wheel bolt torque settings


Pitch circle diameter: 112 mm
Number of wheel bolt holes: 5

47.2.1 6 J x 16

	Caution
<i>Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 434 .</i>	

7M3 601,027 E - Wheel and tyre combination ⇒ [page 435](#)


Size:	6 J x 16
Wheel offset in mm:	53
Wheel load in kg:	730

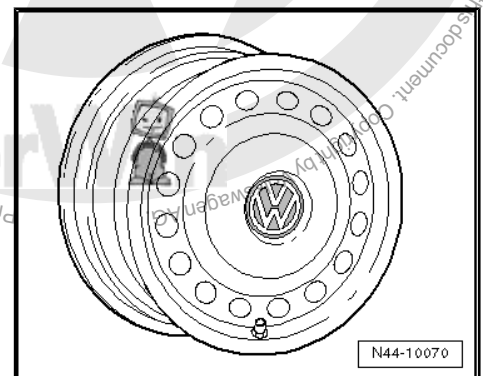



7M3 601,027 F - Wheel and tyre combination ⇒ [page 435](#)

Size:	6 J x 16
Wheel offset in mm:	53
Wheel load in kg:	710

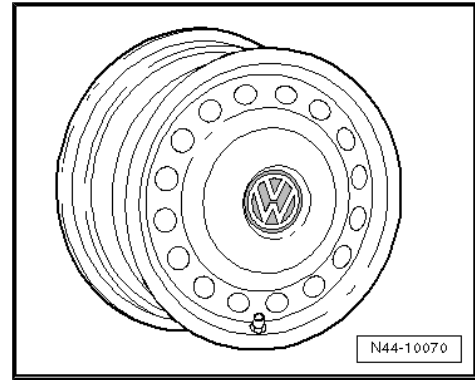



48 Touareg from model year 2003

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of only genuine Volkswagen spare parts. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

48.1 Touareg, type 7L model year 2003 to model year 2010

Attachment to parts certificate 3531709

The parts certificate can be found on the Volkswagen ServiceNet under Accessories/Tyres, Wheels and Tyres, Wheels and Tyres Guide.

Type approval number: e1*2001/116*0203*00 to e1*2001/116*0203*23

Overview



Caution

Take special care with suspension type:

- ◆ *Heavy duty running gear 1BP »Expedition« for which the wheel and tyre combinations are restricted ⇒ [page 438](#)*
- ◆ *For all other types of running gear, the following wheel and tyre combinations apply ⇒ [page 438](#)*



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks	
»Vehicles with heavy duty running gear 1BP (Expedition)«							
R5 TDI 2.5l 120 kW; R5 TDI 2.5l 128 kW diesel engines V6 TDI 3.0l 155 kW; V6 TDI 3.0l 165 kW; V6 TDI 3.0l 176 kW; diesel engines V6 3.2l 162 kW; V6 3.2l 177 kW; V6 3.6l 206 kW petrol engines	Standard tyres	235/65 R 17,108V	7 ¹ / ₂ J x 17 ≧ page 441	55	Yes		
	Modification	No changes are permissible apart from the standard wheel and tyre combinations!					
	Off-road tyres** ≧ page 438	235/65 R 17 108T	7 ¹ / ₂ J x 17 ≧ page 441	55	Yes		
	Winter tyres	235/65 R 17 108T/H	7 ¹ / ₂ J x 17 ≧ page 441	55	Yes		
»All running gear types apart from heavy duty running gear 1BP (Expedition)«							
R5 TDI 2.5l 120 kW; R5 TDI 2.5l 128 kW diesel engines	Standard tyres	235/65 R 17,108V	7 ¹ / ₂ J x 17 ≧ page 441	55	Yes	16" or 17" wheels can only be fitted on vehicles with 16" or 17" brake systems, respectively. * Not for vehicles with 16" brakes (pitch circle diameter 120mm). ** If off-road tyres (with M+S identification) are used, a sticker in the driver's field of vision making reference to the lower permitted maximum speed according to the speed rating of the tyre (T/H) is required, just as for winter tyres.	
	Modification	255/60 R 17,106V	7 ¹ / ₂ J x 17 ≧ page 441	55	Yes		
		255/55 R 18,109V	8 J x 18 ≧ page 443	57	Yes		
		275/45 R 19 108Y	9 J x 19 ≧ page 444	60	No		
		275/40 R 20 106Y	9 J x 20* ≧ page 438	60	No		
	Off-road tyres** ≧ page 438	235/70 R 16 105T/H	7 J x 16 ≧ page 441	54	Yes		
		235/60 R 18 107T	8 J x 18 ≧ page 443	57	Yes		



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
		255/50 R 19,107V	9 J x 19 ⇒ page 444	60	Yes	Snow chains: We recommend using snow chains on all 4 wheels → Electronic parts catalogue „ETKA - Accessories catalogue“ . **** Wheel 7L9 601 025 B (9J x 19 offset 60) is permitted as a winter wheel.
	Winter tyres**** ⇒ page 439	235/65 R 17 108T/H	7½ J x 17 ⇒ page 441	55	Yes	
		255/50 R 19,107V	9 J x 19 ⇒ page 444	60	Yes	
V6 3.2l 162 kW; V6 3.2l 177 kW; V6 3.6l 206 kW; V8 4.2l 228 kW petrol engines;	Standard tyres	235/65 R 17,108V	7½ J x 17 ⇒ page 442	55	Yes	Tyre fitting: Before fitting the tyres, observe the instructions in ⇒ Running gear, axles, steering; Rep. gr. 44 ;
V6 TDI 3.0l 155 kW; V6 TDI 3.0l 165 kW (engine code: BKS); V6 TDI 3.0l 176 kW; diesel engine	Modification	255/60 R 17,106V	7½ J x 17 ⇒ page 442	55	Yes	On vehicles with tyre pressure monitoring of the 1st generation, the tyre inflation pressures have to be saved or adapted again when summer tyres and winter tyres are changed over (either way) ⇒ Running gear, axles, steering; Rep. gr. 44 ;
		255/55 R 18,109V	8 J x 18 ⇒ page 443	57	Yes	
		275/45 R 19 108Y	9 J x 19 ⇒ page 445	60	No	
		275/40 R 20 106Y	9 J x 20 ⇒ page 446	60	No	
		275/40 R 20 106Y*** ⇒ page 439	9½ J x 20 ⇒ page 448	52	No	
	Off-road tyres** ⇒ page 438	235/60 R 18 107T	8 J x 18 ⇒ page 443	57	Yes	
	255/50 R 19,107V	9 J x 19 ⇒ page 445	60	Yes		



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
	Winter tyres**** ⇒ page 439	235/65 R 17 108T/H	7 ¹ / ₂ J x 17 ⇒ page 442	55	Yes	General information on: ♦ Winter tyres ⇒ page 14 ♦ Snow chains ⇒ page 17 Tyre makes recommended by Volkswagen: ♦ Summer tyres ⇒ page 479 ♦ All-season tyres ⇒ page 486 ♦ Winter tyres ⇒ page 502
		235/60 R 18 107H	8 J x 18 ⇒ page 443	57	Yes	
		255/50 R 19,107V	9 J x 19 ⇒ page 445	60	Yes	
V6 TDI 3.0l 165 kW (engine code: CATA)	Standard tyres	235/65 R17 108V	7 ¹ / ₂ J x 17 ⇒ page 442	55	Yes	
	Modification	255/60 R 17,106V	7 ¹ / ₂ J x 17 ⇒ page 442	55	Yes	
		255/55 R 18 109Y	8 J x 18 ⇒ page 443	57	Yes	
		275/45 R 19,108V	9 J x 19 ⇒ page 445	60	No	
	Winter tyres	235/65 R 17 108T/H	7 ¹ / ₂ J x 17 ⇒ page 442	55	Yes	
V10 TDI 5.0l 230 kW diesel engine; V8 4.2l 257 kW; W12 6.0l 331 kW petrol engines	Standard tyres	255/55 R 18 109Y	8 J x 18 ⇒ page 444	57	Yes	
	Modification	275/45 R 19,108Y	9 J x 19 ⇒ page 445	60	No	
		275/40 R 20 106Y	9 J x 20 ⇒ page 446	60	No	
		275/40 R 20 106Y*** ⇒ page 439	9 ¹ / ₂ J x 20 ⇒ page 448	52	No	
	Off-road tyres** ⇒ page 438	235/60 R 18 107T	8 J x 18 ⇒ page 444	57	Yes	
		255/50 R 19,107V	9 J x 19 ⇒ page 445	60	Yes	
	Winter tyres**** ⇒ page 439	235/60 R 18 107H	8 J x 18 ⇒ page 444	57	Yes	



Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
		255/50 R 19, 107V	9 J x 19 ⇒ page 445	60	Yes	

Tyre inflation pressures are located on a sticker on inside of fuel tank flap or in ⇒ Maintenance ; Booklet ; Check tyres: condition, profile, inflation pressure, depth of tread .

48.2 Wheel allocation for Touareg, type 7L model year 2003 to model year 2010

Explanation of information on wheels ⇒ [page 57](#)

Torque settings for wheel bolts ⇒ Running gear, axles, steering; Rep. gr. 44

Number of wheel bolt holes: 5



Note

Currently, no steel wheel with a pitch circle diameter of 130 mm is available for the Touareg. Use the listed wheels with a pitch circle diameter of 130 mm with the sizes stated in the tyres table for winter tyres as well.

48.2.1 7 J x 16




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 437](#) .

R5 TDI 2.5l 120 kW; R5 TDI 2.5l 128 kW

7L6 601 027 - Wheel and tyre combination ⇒ [page 438](#)

Size:	7 J x 16
Wheel offset in mm:	54
Wheel load in kg:	875
Pitch circle diameter:	120

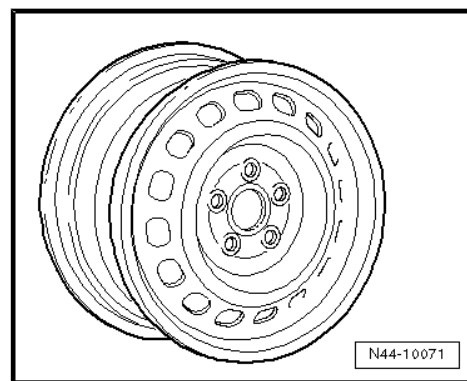

48.2.2 7 1/2 J x 17



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 437](#) .




R5 TDI 2.5l 120 kW; R5 TDI 2.5l 128 kW

7L6 601 025 E - Wheel and tyre combination ⇒ [page 438](#)


Only for vehicles to maximum permissible axle load of 1,750 kg

Size:	7 ¹ / ₂ J x 17
Wheel offset in mm:	55
Wheel load in kg:	875
Pitch circle diameter:	120

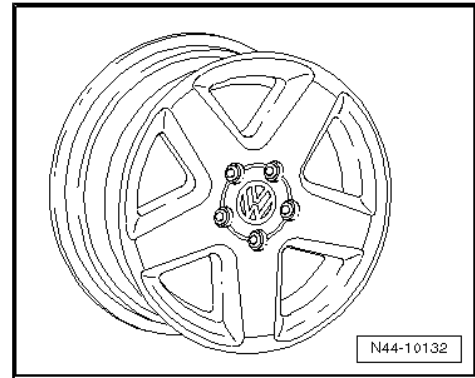

7L6 601 025 AJ - Wheel and tyre combination ⇒ [page 438](#)

Size:	7 ¹ / ₂ J x 17
Wheel offset in mm:	55
Wheel load in kg:	900
Pitch circle diameter:	120

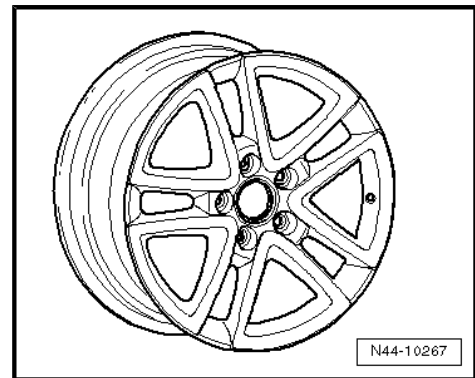


V6 3.2l 162 kW; V6 3.2l 177 kW; V6 3.6l 206 kW; V6 TDI 3.0l 155 kW; V6 TDI 3.0l 165 kW; V6 TDI 3.0l 176 kW; V8 4.2l 228 kW

7L6 601 025 A - Wheel and tyre combination ⇒ [page 439](#)


Only for vehicles to maximum permissible axle load of 1,750 kg

Size:	7 ¹ / ₂ J x 17
Wheel offset in mm:	55
Wheel load in kg:	875
Pitch circle diameter:	130

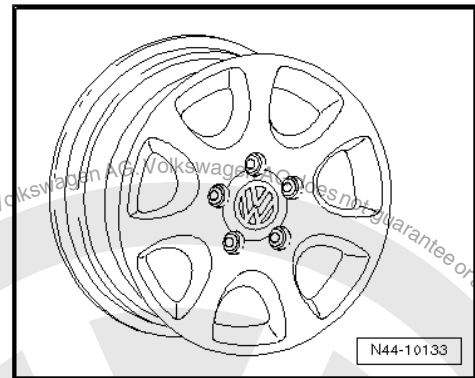

7L6 601 025 AK - Wheel and tyre combination ⇒ [page 439](#)

Size:	7 ¹ / ₂ J x 17
Wheel offset in mm:	55
Wheel load in kg:	900
Pitch circle diameter:	130

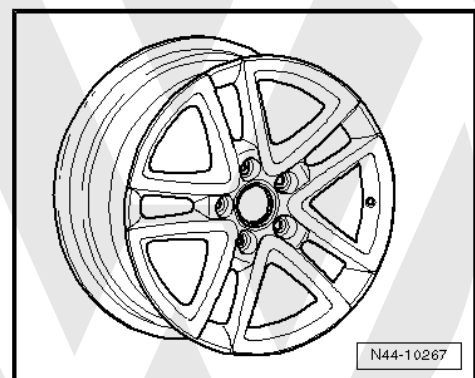


Protected by copyright. Copying for private or commercial purposes in part or in whole is not permitted unless authorized by Volkswagen AG. Volkswagen AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by Volkswagen AG.



7L6 601 025 B - Wheel and tyre combination ⇒ page 439

Only for vehicles to maximum permissible axle load of 1,750 kg

Size:	7 ¹ / ₂ J x 17
Wheel offset in mm:	55
Wheel load in kg:	875
Pitch circle diameter:	130

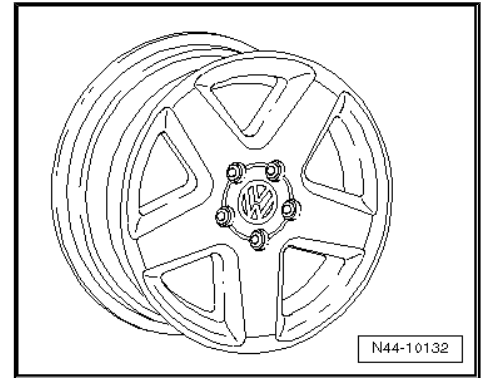

48.2.3 8 J x 18




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 437 .

R5 TDI 2.5l 120 kW; R5 TDI 2.5l 128 kW

7L6 601 025 L - Wheel and tyre combination ⇒ page 438



Size:	8 J x 18
Wheel offset in mm:	57
Wheel load in kg:	900
Pitch circle diameter:	120

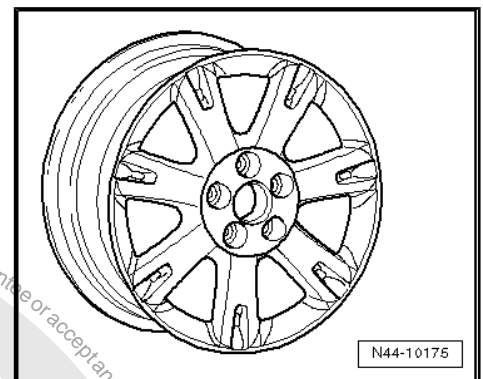

V6 3.2l 162 kW; V6 3.2l 177 kW; V6 3.6l 206 kW; V6 TDI 3.0l 155 kW; V6 TDI 3.0l 165 kW; V6 TDI 3.0l 176 kW; V8 4.2l 228 kW; V8 4.2l 257 kW

7L6 601 025, 7L6 601 025 T - Wheel and tyre combination ⇒ page 439


Size:	8 J x 18
Wheel offset in mm:	57
Wheel load in kg:	900
Pitch circle diameter:	130

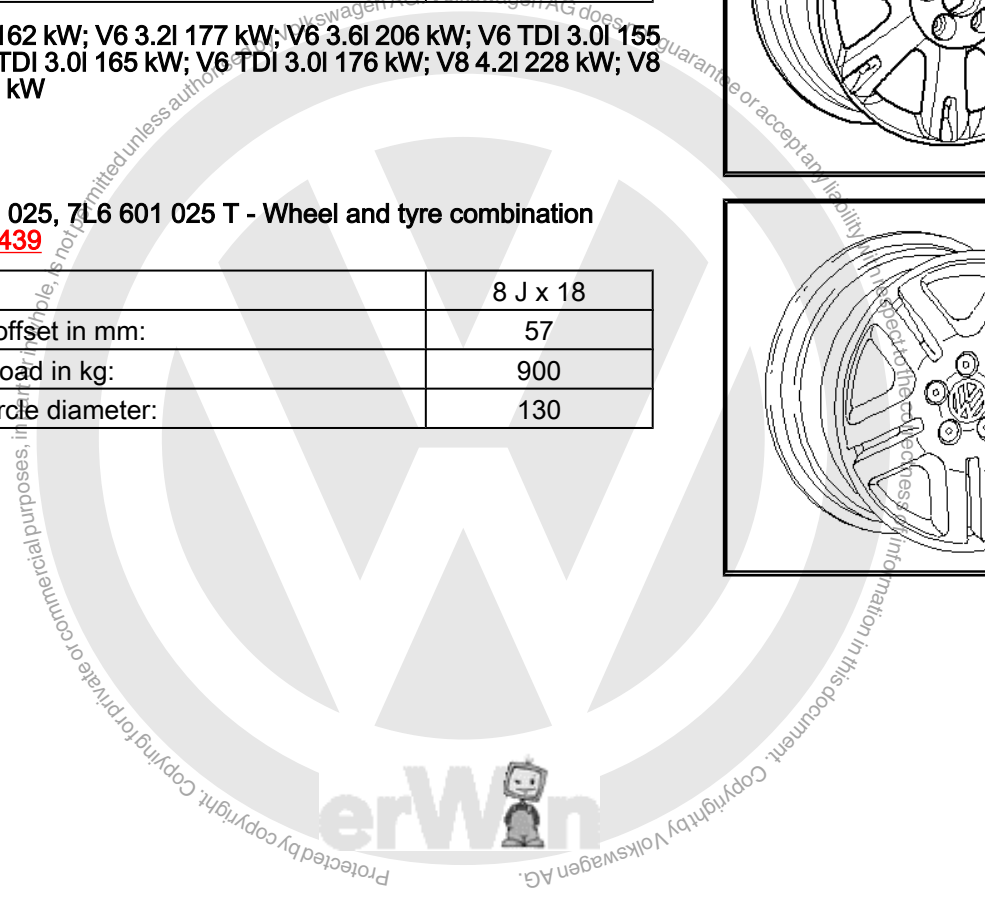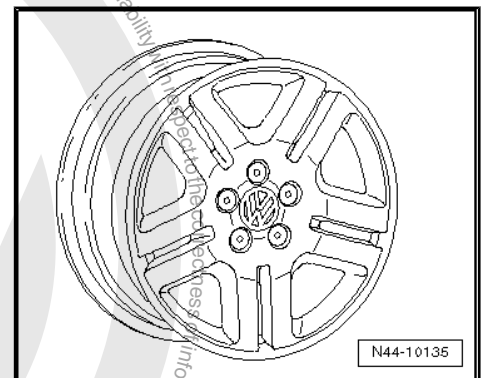




7L6 601 025 C, 7L6 601 025 AA - Wheel and tyre combination
⇒ [page 439](#)

Size:	8 J x 18
Wheel offset in mm:	57
Wheel load in kg:	900
Pitch circle diameter:	130

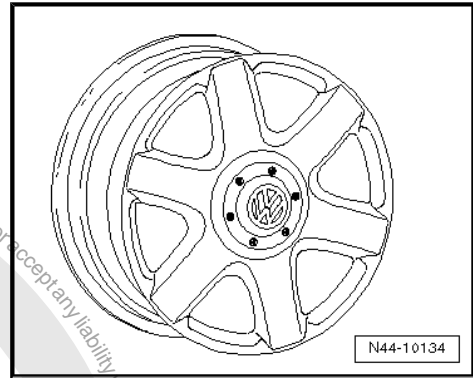

7L6 601 025 K - Wheel and tyre combination ⇒ [page 439](#)


Size:	8 J x 18
Wheel offset in mm:	57
Wheel load in kg:	900
Pitch circle diameter:	130

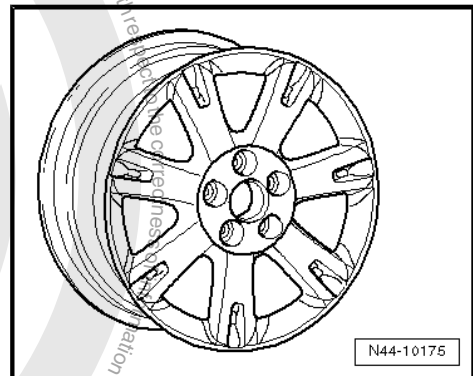

V10 TDI 5.0l 230 kW; W12 6.0l 331 kW


7L6 601 025 C, 7L6 601 025 AA - Wheel and tyre combination
⇒ [page 440](#)

Size:	8 J x 18
Wheel offset in mm:	57
Wheel load in kg:	900
Pitch circle diameter:	130

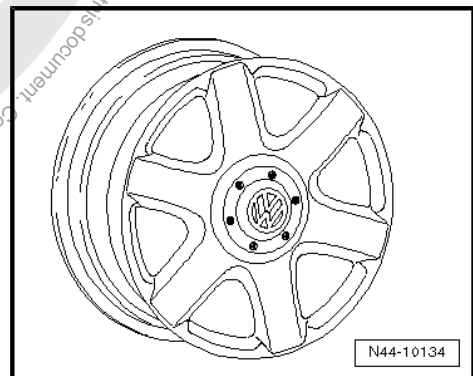

7L6 601 025 K - Wheel and tyre combination ⇒ [page 440](#)

Size:	8 J x 18
Wheel offset in mm:	57
Wheel load in kg:	900
Pitch circle diameter:	130

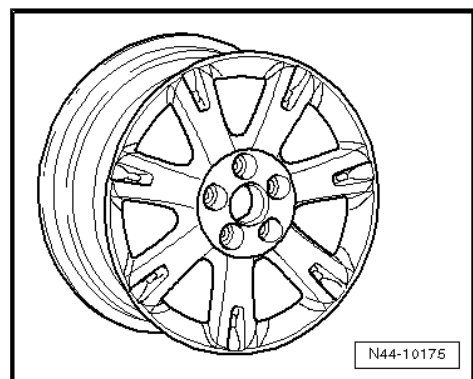

48.2.4 9 J x 19



Caution


Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 437](#).



R5 TDI 2.5l 120 kW; R5 TDI 2.5l 128 kW


7L6 601 025 N - Wheel and tyre combination ⇒ [page 438](#)

Size:	9 J x 19
Wheel offset in mm:	60
Wheel load in kg:	900
Pitch circle diameter:	120

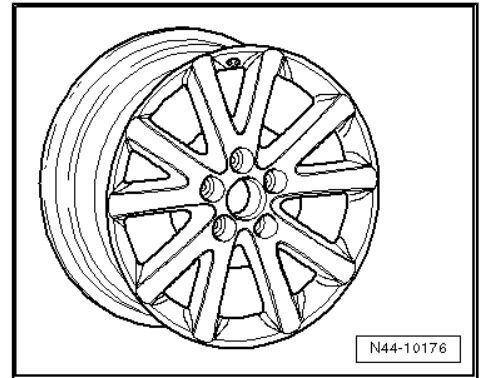


7L6 601 025 AC - Wheel and tyre combination ⇒ [page 438](#)

Size:	9 J x 19
Wheel offset in mm:	60
Wheel load in kg:	900
Pitch circle diameter:	120

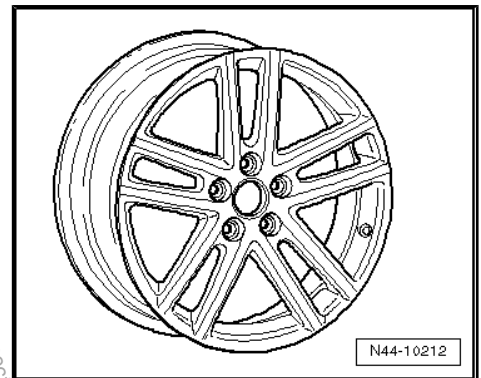

7L6 601 025 AB - Wheel and tyre combination ⇒ [page 438](#)

Size:	9 J x 19
Wheel offset in mm:	60
Wheel load in kg:	900
Pitch circle diameter:	120

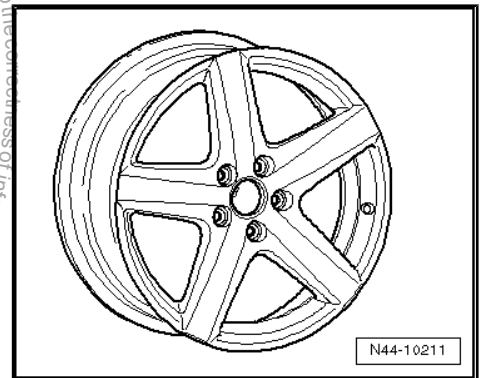


V6 3.2l 162 kW; V6 3.2l 177 kW; V6 3.6l 206 kW; V6 TDI 3.0l 155 kW; V6 TDI 3.0l 165 kW; V6 TDI 3.0l 176 kW; V8 4.2l 228 kW; V8 4.2l 257 kW

V10 TDI 5.0l 230 kW; W12 6.0l 331 kW

7L6 601 025 D - Wheel and tyre combination ⇒ [page 439](#)


Size:	9 J x 19
Wheel offset in mm:	60
Wheel load in kg:	900
Pitch circle diameter:	130

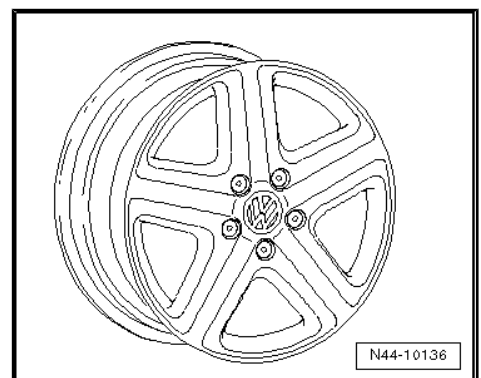




7L6 601 025 S - Wheel and tyre combination ⇒ page 439

Size:	9 J x 19
Wheel offset in mm:	60
Wheel load in kg:	900
Pitch circle diameter:	130

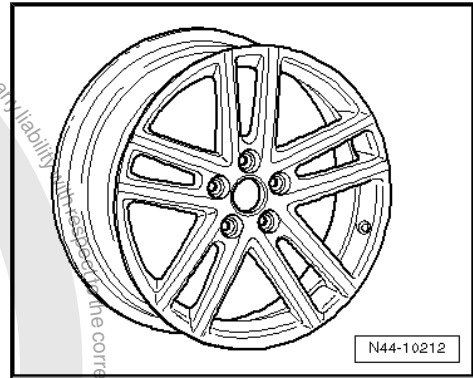


7L6 601 025 R - Wheel and tyre combination ⇒ page 439

Size:	9 J x 19
Wheel offset in mm:	60
Wheel load in kg:	900
Pitch circle diameter:	130

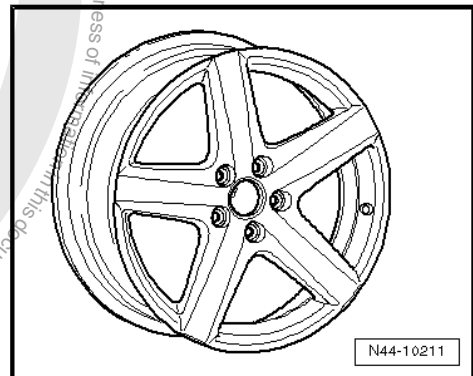

7L6 601 025 AM - Wheel and tyre combination ⇒ page 439

Size:	9 J x 19
Wheel offset in mm:	60
Wheel load in kg:	900
Pitch circle diameter:	130

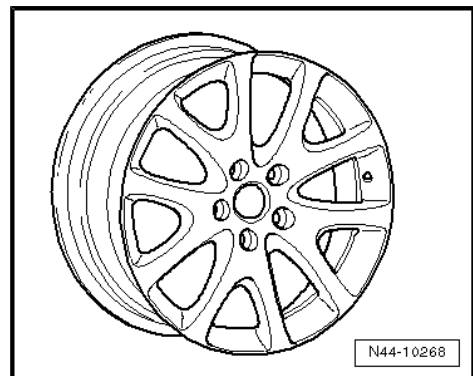


7L9 601 025 B - Wheel and tyre combination ⇒ page 439

 **Note**

Not authorised as a winter wheel.

Size:	9 J x 19
Wheel offset in mm:	60
Wheel load in kg:	900
Pitch circle diameter:	130

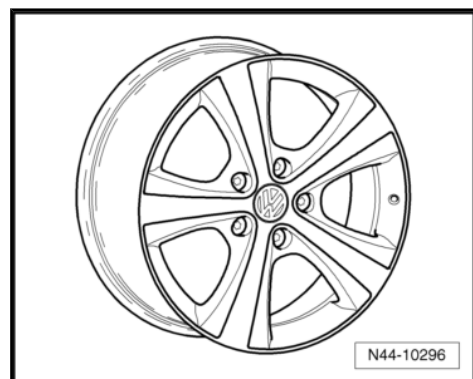

48.2.5 9 J x 20



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 437.




V6 3.2l 162 kW; V6 3.2l 177 kW; V6 3.6l 206 kW; V6 TDI 3.0l 155 kW; V6 TDI 3.0l 165 kW; V6 TDI 3.0l 176 kW; V8 4.2l 228 kW; V8 4.2l 257 kW

V10 TDI 5.0l 230 kW; W12 6.0l 331 kW


7L6 601 025 P - Wheel and tyre combination ⇒ [page 439](#)

Size:	9 J x 20
Wheel offset in mm:	60
Wheel load in kg:	900
Pitch circle diameter:	130

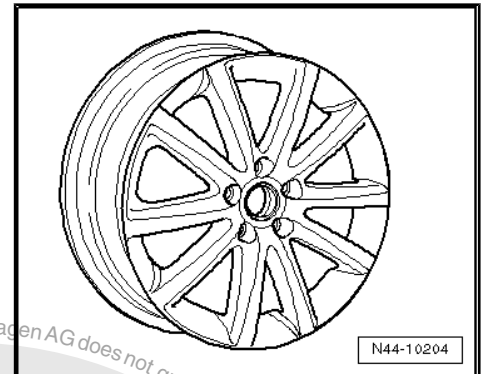


7L6 601 025 Q - Wheel and tyre combination ⇒ [page 439](#)

Size:	9 J x 20
Wheel offset in mm:	60
Wheel load in kg:	900
Pitch circle diameter:	130

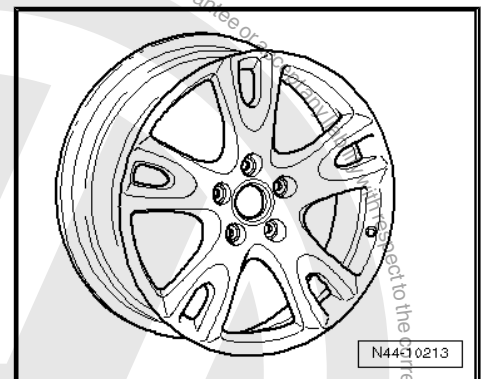


7L6 601 025 AN - Wheel and tyre combination ⇒ [page 439](#)

Size:	9 J x 20
Wheel offset in mm:	60
Wheel load in kg:	900
Pitch circle diameter:	130

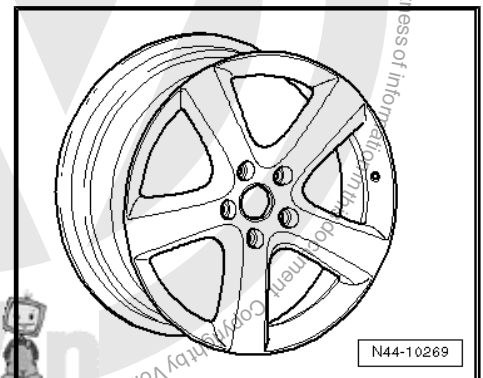

7L6 601 025 AP - Wheel and tyre combination ⇒ [page 439](#)


Size:	9 J x 20
Wheel offset in mm:	60
Wheel load in kg:	900
Pitch circle diameter:	130

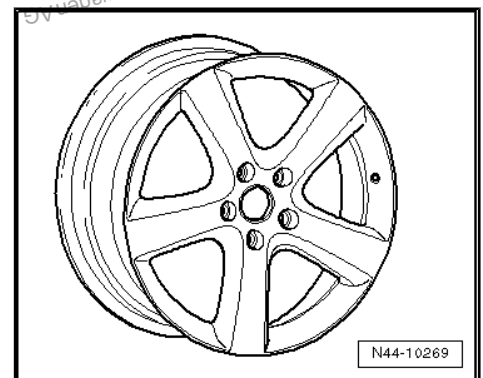



7L9 601 025 C - Wheel and tyre combination ⇒ [page 439](#)

Size:	9 J x 20
Wheel offset in mm:	60
Wheel load in kg:	900
Pitch circle diameter:	130

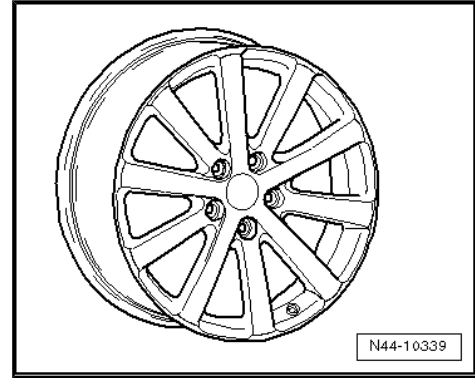

48.2.6 9¹/₂ J x 20



Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 437](#).



Caution

Fitting the 9¹/₂ J x 20-wheel is possible only under the following conditions:


- The wheel housing and wing extensions must have been installed by Volkswagen R GmbH ⇒ *Electronic parts catalogue „ETKA“*.

V6 3.2l 162 kW; V6 3.2l 177 kW; V6 3.6l 206 kW; V6 TDI 3.0l 155 kW; V6 TDI 3.0l 165 kW; V6 TDI 3.0l 176 kW; V8 4.2l 228 kW; V8 4.2l 257 kW

V10 TDI 5.0l 230 kW; W12 6.0l 331 kW

7L9 601 025 - Wheel and tyre combination ⇒ [page 439](#)

Size:	9 ¹ / ₂ J x 20
Wheel offset in mm:	52
Wheel load in kg:	900
Pitch circle diameter:	130

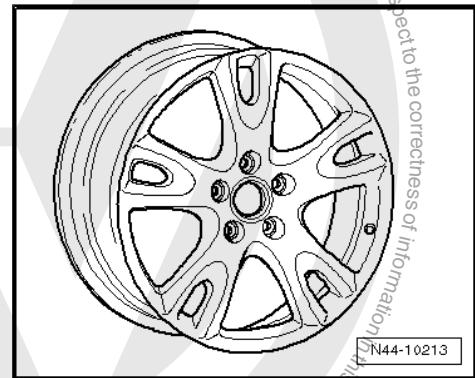



49 Touareg R50 from model year 2008

General

Volkswagen vehicles are built according to the latest findings in safety engineering. To keep it that way, we recommend the use of only genuine Volkswagen spare parts. You can recognise this by the VW Audi logo and by the part number. It has been established that these parts are reliable, safe and suitable.

Despite constant appraisal of the market, we cannot assess other products on these points, even when in isolated cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot, of course, assume any liability if these products are installed.



WARNING

The products from Volkswagen genuine parts and Votex genuine accessories may differ in fitting requirements, torque specifications and so on.

Always follow the respective fitting and operating instructions.

The wheel and tyre combinations or changes listed in the vehicle tables refer exclusively to Volkswagen Genuine wheels. Approval of wheel and tyre combinations or a change to wheels from the accessories trade is not possible with the parts certificate attached here.



WARNING

The fitting instructions and torque specifications for wheels from Votex genuine accessories may differ from those intended for wheels from Volkswagen genuine parts.

Therefore, always observe the torque settings for the wheel bolts as well as the respective fitting and operating instructions.

49.1 Touareg R50, type 7L model year 2008 to model year 2010

Attachment to parts certificate 3531/09

The parts certificate can be found on the Volkswagen ServiceNet under Accessories/Tyres, Wheels and Tyres, Wheels and Tyres Guide.

Type approval number: e1*2001/116*0203*17 to e1*2001/116*0203*23

Overview

Model engine output	Tyres	Tyre size	Wheel rim	Off-set in mm	Snow chains	Remarks
V10 TDI 5.0l 258 kW diesel engine	Standard tyres	295/35 R 21 107Y	10 J x 21 ⇒ page 453	50	No	General information on: ◆ Winter tyres ⇒ page 14 ◆ Snow chains ⇒ page 17





Model engine output	Tyres	Tyre size	Wheel rim	Offset in mm	Snow chains	Remarks
	Modification	275/40 R 20 106Y	9 J x 20 ⇒ page 452	60	No	Tyre makes recommended by Volkswagen: ♦ Summer tyres ⇒ page 479 ♦ Winter tyres ⇒ page 502 * If off-road tyres (with M+S identification) are used, a sticker in the driver's field of vision making reference to the lower permitted maximum speed according to the speed rating of the tyre (T/H) is required, just as for winter tyres. ** Wheel 7L9 601 025 B (9J x 19 offset 60) is not authorised as a winter wheel.
		275/40 R 20 106Y	9 1/2 J x 20 ⇒ page 453	52	No	
	Cross country tyres* ⇒ page 450	255/50 R 19,107V	9 J x 19 ⇒ page 450	60	Yes	
	Winter tyres** ⇒ page 450	255/50 R 19,107V	9 J x 19 ⇒ page 450	60	Yes	

Tyre inflation pressures are located on a sticker on inside of fuel tank flap or in ⇒ Maintenance ; Booklet ; Check tyres: condition, profile, inflation pressure, depth of tread .

49.2 Wheel allocation for Touareg R50, type 7L model year 2008 to model year 2010

Explanation of information on wheels ⇒ [page 57](#)

Torque settings for wheel bolts ⇒ Running gear, axles, steering;
Rep. gr. 44

Pitch circle diameter: 130
Number of wheel bolt holes: 5



Note

Currently, no steel wheel with a pitch circle diameter of 130 mm is available for the Touareg. Use the listed wheels with a pitch circle diameter of 130 mm with the sizes stated in the tyres table for winter tyres as well.

49.2.1 9 J x 19




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ [page 449](#) .




7L6 601 025 D - Wheel and tyre combination ⇒ page 450

Size:	9 J x 19
Wheel offset in mm:	60
Wheel load in kg:	900

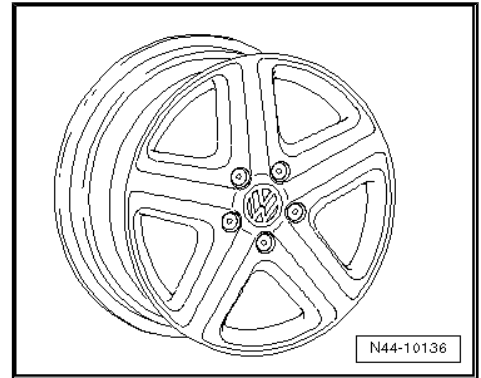


7L6 601 025 S - Wheel and tyre combination ⇒ page 450

Size:	9 J x 19
Wheel offset in mm:	60
Wheel load in kg:	900

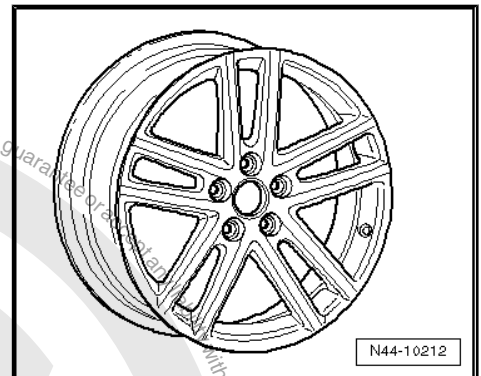


7L6 601 025 R - Wheel and tyre combination ⇒ page 450

Size:	9 J x 19
Wheel offset in mm:	60
Wheel load in kg:	900

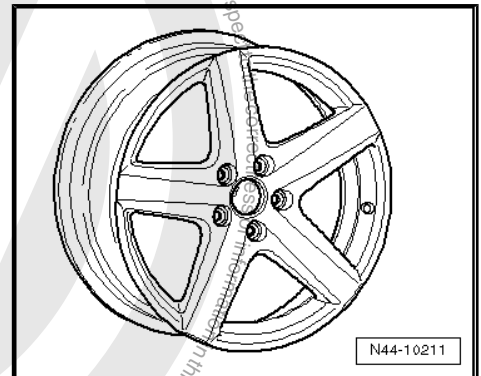

7L6 601 025 AM - Wheel and tyre combination ⇒ page 450

Size:	9 J x 19
Wheel offset in mm:	60
Wheel load in kg:	900

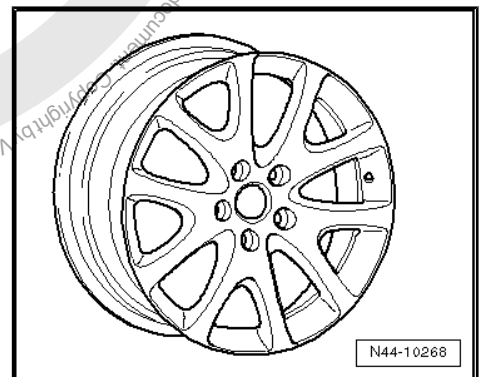




7L9 601 025 B - Wheel and tyre combination ⇒ page 450



Note

Not authorised as a winter wheel.

Size:	9 J x 19
Wheel offset in mm:	60
Wheel load in kg:	900

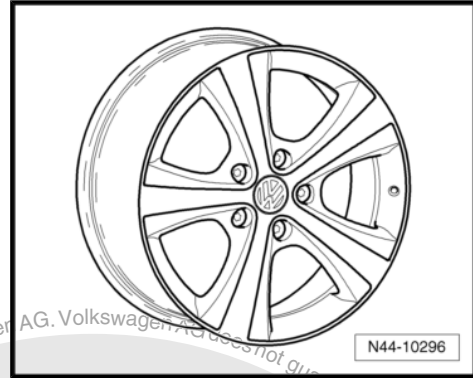

49.2.2 9 J x 20




Caution

Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 449 .


7L6 601 025 P - Wheel and tyre combination ⇒ page 450

Size:	9 J x 20
Wheel offset in mm:	60
Wheel load in kg:	900

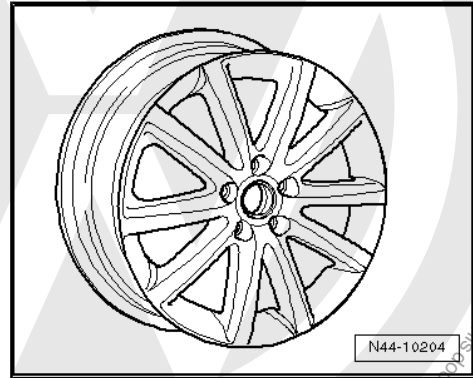


7L6 601 025 Q - Wheel and tyre combination ⇒ page 450

Size:	9 J x 20
Wheel offset in mm:	60
Wheel load in kg:	900

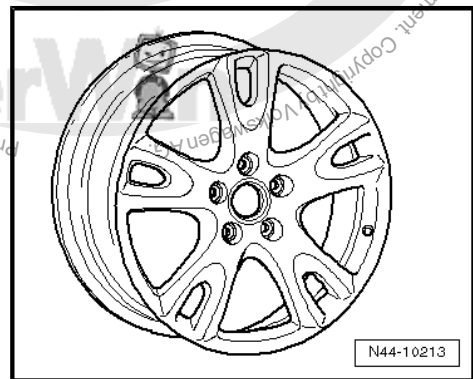

7L6 601 025 AN - Wheel and tyre combination ⇒ page 450


Size:	9 J x 20
Wheel offset in mm:	60
Wheel load in kg:	900

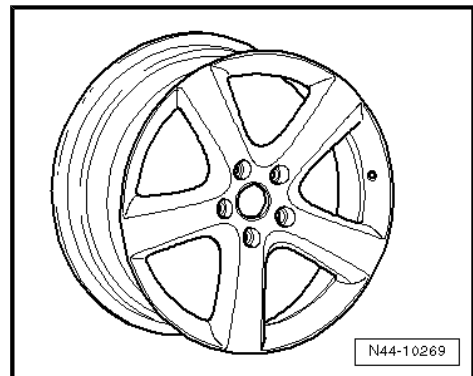




7L6 601 025 AP - Wheel and tyre combination ⇒ page 450

Size:	9 J x 20
Wheel offset in mm:	60
Wheel load in kg:	900

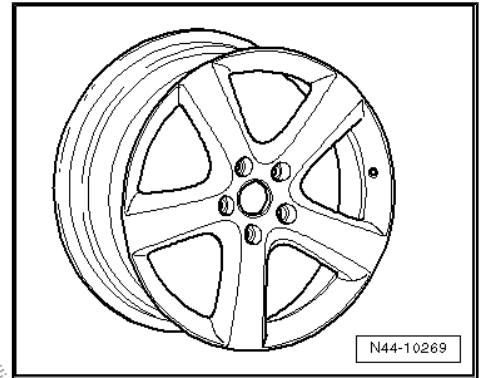

7L9 601 025 C - Wheel and tyre combination ⇒ page 450

Size:	9 J x 20
Wheel offset in mm:	60
Wheel load in kg:	900

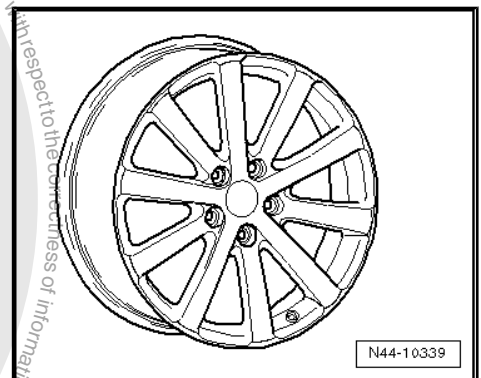


49.2.3 9¹/₂ J x 20

⚠ Caution
 Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 449 .

7L9 601 025 - Wheel and tyre combination ⇒ page 450

Size:	9 ¹ / ₂ J x 20
Wheel offset in mm:	52
Wheel load in kg:	900

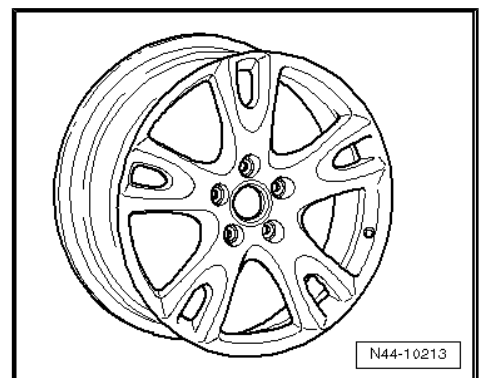


49.2.4 10 J x 21

⚠ Caution
 Observe the allocation of wheels and tyres to the respective engines, which are listed in the overview table ⇒ page 449 .



7L9 601 025 D - Wheel and tyre combination ⇒ [page 449](#)

Size:	10 J x 21
Wheel offset in mm:	50
Wheel load in kg:	900

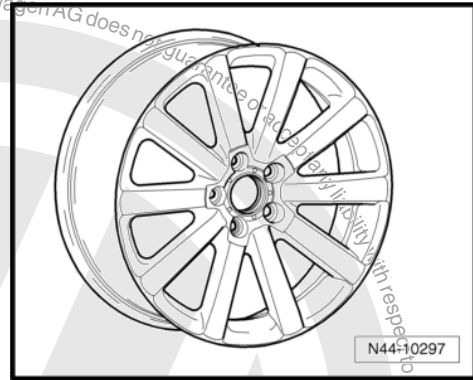



50 Breakdown set for VW Vehicles

Model	Spare part No. tyre sealant	Spare part No. compressor
Lupo 3L, type 6E; Lupo FSI, type 6E; Lupo GTI, type 6ES	8D0 012 619	8D0 012 615
Golf R32, type 1J	8D0 012 619	8D0 012 615



51 Temporary spare tyres and wheels for VW vehicles

Observe the notes on the use of temporary spare wheels

⇒ [page 68](#) .

Model	Wheel		Tyres		
	Size	Spare part No.	Size	Make	Tread
Lupo, type 6X	3 1/2 J x 14 ET 42	6N0 601 025 G	T105/70 R 14 84M	Continental Michelin	CST 17 TEX
Polo, type 6N	3 1/2 J x 14 ET 42 3 1/2 J x 14 ET 45	6N0 601 025 G 1H0 601 027 C	T105/70 R 14 84M	Continental Michelin Firestone	CST 17 TEX Temporary spare
Polo Classic, type 6KV; Polo estate, type 6KV	3 1/2 J x 14 ET 38	1L0 601 025 D	T105/70 R 14 84M	Continental Michelin Firestone	CST 17 TEX Temporary spare
Golf, Golf Cabriolet, Type 1HX0 With 4 holes (basic running gear)	3 1/2 J x 14 ET 40 3 1/2 J x 14 ET 45	357 601 0257 D 1H0 601 027 C	T105/70 R 14 84M	Continental Michelin Firestone	CST 17 TEX Temporary spare
Golf Cabriolet, type 1E	3 1/2 J x 14 ET 45	1H0 601 027 C	T105/70 R 14 84M	Continental Michelin Firestone	CST 17 TEX Temporary spare
Golf, type 1HX0/1H with 5 holes (Plus running gear) Vento, type 1HX0/1H with 4 holes Golf estate, type 1HX0/1H with 4 holes	3 1/2 J x 15 ET 38 3 1/2 J x 15 ET 40	1H0 601 027 H 535 601 025 A	T115/70 R 15 90M	Continental Michelin Goodyear	CST 17 TEX HPS
Golf Syncro, type 1HX1 Golf Estate Syncro, type 1HX1 with 4 holes	3 1/2 J x 15 ET 40	535 601 025 A	T125/75 R 15 95M	Continental	CST 17
Golf, type 1HX0/1H GTI, 16V, VR6 from 01.95 Vento VR6, type 1HX0/1H	3 1/2 J x 16 ET 38	3A0 601 025	T125/70 R 16 96M	Continental	CST 17
Golf VR6 Syncro, type 1HX1 Golf Estate VR6 Syncro, type 1HX1	3 1/2 J x 16 ET 38	3A0 601 025	T125/80 R 15 95M	Continental	CST 17
Golf, type 1K	3 1/2 J x 18 offset 25.5	1K0 601 027 B	T125/70 R 18 99M	Goodyear Continental	Conv. Spare CST 17



Model	Wheel		Tyres		
	Size	Spare part No.	Size	Make	Tread
	3 1/2 J x 16 wheel offset 25.5 ¹⁾	1K0 601 027 F	T125/70 R 16 96M	Continental Hankook Kumho	CST 17 S300 121
Golf Plus/CrossGolf, model 1KP	3 1/2 J x 18 offset 25.5	1K0 601 027 B	T125/70 R 18 99M	Goodyear Continental	Conv. Spare CST 17
	3 1/2 J x 16 wheel offset 25.5 ¹⁾	1K0 601 027 F	T125/70 R 16 96M	Continental Hankook Kumho	CST 17 S300 121
Golf estate, type 1HX0/1H with 4 holes	3 1/2 J x 15 ET 40	1H0 601 025 A	T115/70 R 15 90M	Continental	CST 17
				Michelin Goodyear	TEX HPS
Golf, Bora, Golf Estate, Bora Estate, type 1J front and four-wheel drive	3 1/2 J x 18 ET 38	1J0 601 027 M	T125/70 R 18 99M	Continental	CST 17
Golf Variant, type 1KM	3 1/2 J x 18 offset 25.5	1K0 601 027 B	T125/70 R 18 99M	Goodyear Continental	Conv. Spare CST 17
New Beetle RSi, type 9CR	3 1/2 J x 18 ET 38	1J0 601 027 M	T125/70 R 18 99M	Continental	CST 17
Passat, type 35l	3 1/2 J x 15 ET 40	535 601 025 A	T125/70 R 15 95M	Continental	CST 17
				Michelin Firestone	TEX Temporary spare
Passat Syncro, type 35l-299	3 1/2 J x 15 ET 40	535 601 025 A	T125/80 R 15 95M	Continental	CST 17
Passat, type 35l 81 kW TDI, 16V and VR6	3 1/2 J x 16 ET 38	3A0 601 025	T125/70 R 16 96M	Continental	CST 17
Passat, type 3B	4.00 B x 15 ET 45	447 601 025 G/S	T125/90 R 15 95M	Michelin	TEX
Passat from model year 2001, Type 3BG	3 1/2 J x 18 ET 40	3B7 601 027 A	T125/70 R 18 99M	Continental	CST 17
Passat W8, type 3BS	3 1/2 J x 18 ET 40	3B7 601 027 A	T125/70 R 18 99M	Continental	CST 17



52 Recommended summer tyres

Notes regarding the recommended makes of summer tyre

- ◆ Tyres are one of the most important elements in motor vehicle construction and have a major influence on road safety. Therefore, they must fulfil numerous conditions which are specified for tyre manufacturers in the DIN (German industrial standards) and the directives of the German rubber industry e. V. (W.d.K.). In addition, comprehensive testing is carried out at Volkswagen before tyres are approved for initial fitting on our vehicles.
- ◆ The following lists all tyre makes and tread patterns that are fitted to VW vehicles ex-factory, correct at the time of publication.
- ◆ These tyre makes/tread patterns meet the aforementioned demands. We therefore recommend the tyres/tread types listed in this guide are chosen as replacements.
- ◆ Observe special requirements for tyres with run-flat properties ⇒ [page 54](#) .

52.1 Summer tyres Lupo 3L model year 1999 to model year 2005

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
155/65 R 14 75T	Bridgestone	B 381 Ecopia

52.2 Summer tyres Lupo FSI model year 1999 to model year 2005

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
175/60 R 14 79H	Dunlop	SP 10A

52.3 Summer tyres Lupo GTI model year 1999 to model year 2005

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
205/45 R 15 81V	Dunlop	SP 2000 E

52.4 Summer tyres Lupo model year 1999 to model year 2005

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
155/70 R 13 75T	Continental	Eco Contact EP
	Firestone	F 580
	Michelin	XT1
	Hankook	K701
175/65 R 13 80T	Continental	Eco Contact EP



Tyre size	Make	Tread pattern
	Firestone	F 580
	Michelin	XT1
185/55 R 14 80H	Continental	Eco Contact CP
	Firestone	FH 700 F
	Michelin	XH1
	Dunlop	SP Sport 2000 E
195/45 R 15 78V	Michelin	Pilot SX GT
	Dunlop	SP Sport 2040 E
	Pirelli	P 6000

52.5 Summer tyres Polo model year 1995 to model year 2001

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
155/70 R 13 75T	Continental	Eco Contact EP
	Firestone	F 580
	Michelin	Energy XT1
175/65 R 13 80T	Continental	Eco Contact EP
	Firestone	F 580
	Michelin	MXT Energy XT1
185/55 R 14 79H	Continental	CH 90
	Firestone	FH 700 FS
	Michelin	SX GT
	Dunlop	SP Sport 2000 E
185/55 R 14 80H	Continental	Eco Contact CP
	Firestone	FH 700 F
	Michelin	XH1
	Dunlop	SP Sport 2000 E
195/45 R 15 78V	Michelin	Pilot SX GT
	Dunlop	SP Sport 2040 E
	Pirelli	P 6000

52.6 Summer tyres Polo saloon/sedan model year 2004 to model year 2005

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
155/80 R 13 79T	Firestone	F 590
	Hankook	K 701
165/70 R 14 81T	Continental	CEC CP
	Firestone	F 590
	Goodyear	GT 2E
	Michelin	XT1
	Dunlop	SP 10A
185/60 R 14 82T	Continental	CEC CP



Tyre size	Make	Tread pattern
	Dunlop	SP 10E
	Firestone	F 590
	Michelin	XT 2
	Kumho	PM 769
185/60 R 14 82H	Continental	CEC CP
	Continental	Premium Co
	Dunlop	SP 2000 E
	Firestone	F 590
	Goodyear	NCT 5
	Michelin	XH 1
	Kumho	PM 769
195/50 R 15 82V	Bridgestone	Turanza ER 30
	Dunlop	SP 2020 E
	Goodyear	NCT 5
	Michelin	Primacy
	Pirelli	P 6000
195/55 R 15 85V	Michelin	Pilot Primacy
	Dunlop	SP 2000 E
	Goodyear	NCT 5
	Firestone	FH 700 FS
205/45 R 16 83W	Bridgestone	Turanza ER 30
	Continental	Sport Contact
	Dunlop	SP 2000 E
	Hankook	Optimo K406
	Michelin	Primacy

52.7 Summer tyres Polo Classic model year 1996 to model year 2002

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
175/65 R 14 86T	Firestone	F 580
	Michelin	Agillis
185/60 R 14 82T	Continental	Eco Contact EP
	Michelin	MXT Energy
	Pirelli	P 3000
185/60 R 14 82H	Continental	CH 90
	Dunlop	D8 M2
	Michelin	MXV3A Energy
185/55 R 15 81H	Michelin	MXV3A Energy
	Firestone	FH 700
185/55 R 15 82H	Pirelli	P 6000
	Firestone	FH 700



52.8 Summer tyres Polo estate model year 1998 to model year 2002

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
175/65 R 14 86T	Firestone	F 580
	Michelin	Agillis
185/60 R 14 82T	Continental	Eco Contact EP
	Michelin	MXT Energy
	Pirelli	P 3000
185/60 R 14 82H	Continental	CH 90
	Dunlop	D8 M2
	Michelin	MXV3A Energy
185/55 R 15 81H	Michelin	MXV3A Energy
	Firestone	FH 700
185/55 R 15 82H	Pirelli	P 6000
	Firestone	FH 700

52.9 Summer tyres for Polo from model year 2002

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern	Remarks
155/80 R 13 79T	Firestone	F 590	
	Hankook	K 701	
165/70 R 14 81T	Michelin	XT1	
	Michelin	Energy 3	
	Firestone	F 590	
	Goodyear	GT 2E	
	Continental	Euro Contact 3	
	Dunlop	SP 10A	
185/60 R 14 82T	Pirelli	P 4	
	Continental	Euro Contact 3	
	Michelin	XT 2	
	Pirelli	P 6	
	Dunlop	SP 10E	
	Firestone	F 590	
	Kumho	PM 769	
Matador	MP 42		
185/60 R 14 82H	Continental	CEC CP	
	Continental	Premium Co	
	Michelin	Energy 3A	
	Goodyear	NCT 5	
	Pirelli	P 6	
	Dunlop	SP 2000 E	
	Kumho	KH15	
	Kumho	PM 769	
Firestone	F 590		



Tyre size	Make	Tread pattern	Remarks
195/50 R 15 85H	Bridgestone	Turanza ER 300	
	Dunlop	SP01	Tyres with run-flat properties ⇒ page 54
195/55 R 15 85V	Michelin	Pilot Primacy	
	Pirelli	P 6	
	Dunlop	SP 2000 E	
	Goodyear	NCT 5	
	Firestone	FH 700 FS	
	Continental	Premium Contact 2	
	Dunlop	SP01	Tyres with run-flat properties ⇒ page 54
205/45 R 16 83W	Bridgestone	Turanza ER 300	
	Continental	Sport Contact 2	
	Dunlop	SP 2000 E	
	Dunlop	SportMaxx	
	Hankook	Optimo K406	
	Michelin	Primacy	

52.10 Summer tyres for Polo Fun model year 2004 to model year 2005

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
215/40 ZR 17 83W	Dunlop	SP 9000
	Dunlop	SportMaxx

52.11 Summer tyres for CrossPolo from model year 2006

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
215/40 ZR 17 83W	Dunlop	SP 9000
	Dunlop	SportMaxx

52.12 Summer tyres for Polo BlueMotion from model year 2007

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
165/70 R 14 81T	Dunlop	SP 10A
	Continental	Euro Contact 3
	Firestone	F 590
	Goodyear	GT 2E
	Michelin	XT1
	Michelin	Energy 3
	Pirelli	P 4



52.13 Summer tyres for Polo GTI from model year 2007

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
205/45 R 16 83W	Bridgestone	Turanza ER 300
	Continental	Sport Contact 2
	Dunlop	SP 2000 E
	Dunlop	SportMaxx
	Hankook	Optimo K406
	Michelin	Primacy
205/45 R 17 84W	Dunlop	SportMaxx

52.14 Summer tyres for Polo GTI Cup Edition from model year 2007

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
205/45 R 16 83W	Bridgestone	Turanza ER 300
	Continental	Sport Contact 2
	Dunlop	SP 2000 E
	Dunlop	SportMaxx
	Hankook	Optimo K406
	Michelin	Primacy
205/45 R 17 84W	Dunlop	SportMaxx

52.15 Summer tyres Golf, Vento model year 1992 to model year 1998

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
175/70 R 13 82T	Continental	CT 22
	Continental	Eco Contact CP
	Michelin	MXT Energy
185/60 R 14 82T	Continental	Eco Contact CP
	Michelin	MXT Energy
	Firestone	F 580
185/60 R 14 82H	Continental	CH 90
	Dunlop	SP Sport D8 M2
	Michelin	MXV3A Energy
195/60 R 14 86H	Continental	CH 90
	Continental	Eco Contact CP
	Michelin	Energy XH 1
195/50 R 15 82V	Continental	CV 90
	Dunlop	SP 2000
	Michelin	MXV3A Energy



Tyre size	Make	Tread pattern
	Fulda	Y 2000 + A
205/50 R 15 86V	Dunlop	SP Sport 2000
	Michelin	MXV3A Energy
	Firestone	FH 690
	Fulda	Y 2000 + A
205/50 R 15 86W	Michelin	MXV3A Energy
	Dunlop	SP Sport 2000
205/45 R 16 83V/W	Dunlop	SP Sport 2000 E
215/40 R 16 86W (reinforced) Extraload	Dunlop	SP Sport 2040 E

52.16 Summer tyres Golf estate model year 1994 to model year 1998

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
175/70 R 13 82T	Continental	CT 22
	Continental	Eco Contact CP
	Michelin	MXT Energy
185/60 R 14 82T	Continental	Eco Contact CP
	Michelin	MXT Energy
	Firestone	F 580
185/60 R 14 82H	Continental	CH 90
	Dunlop	SP Sport D8 M2
	Michelin	MXV3A Energy
195/60 R 14 86H	Continental	CH 90
	Continental	Eco Contact CP
	Michelin	Energy XH 1
195/50 R 15 82V	Continental	CV 90
	Dunlop	SP 2000
	Michelin	MXV3A Energy
	Fulda	Y 2000 + A
205/50 R 15 86V	Dunlop	SP Sport 2000
	Michelin	MXV3A Energy
	Firestone	FH 690
	Fulda	Y 2000 + A
205/50 R 15 86W	Michelin	MXV3A Energy
	Dunlop	SP Sport 2000
205/45 R 16 83V/W	Dunlop	SP Sport 2000 E
215/40 R 16 86W (reinforced) Extraload	Dunlop	SP Sport 2040 E



52.17 Summer tyres Golf cabriolet model year 1994 to model year 1997

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
185/60 R 14 82T	Continental	Eco Contact CP
	Michelin	MXT Energy
	Firestone	F 580
185/60 R 14 82H	Continental	CH 90
	Dunlop	SP Sport D8 M2
	Michelin	MXV3A Energy
195/50 R 15 82V	Continental	CV 90
	Dunlop	SP 2000
	Michelin	MXV3A Energy
	Fulda	Y 2000 + A
205/45 R 16 83V/W	Dunlop	SP Sport 2000 E

52.18 Summer tyres Golf, Golf 4Motion model year 1998 to model year 2004

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern	Remarks
175/80 R 14 88T	Michelin	XT 1	
	Firestone	F 580-FS	
	Continental	Eco Contact EP	
	Goodyear	GT2E	
	Dunlop	SP 10 3e	
175/80 R 14 88H	Dunlop	SP Sport 200 E	
	Firestone	F 580	
	Continental	Eco Contact CP	
	Michelin	XH1	
	Toyo	TYJ35	
	Dunlop	SP Sport 200 ULW (ultra light weight)	
195/65 R 15 91T	Continental	Eco Contact EP	
	Dunlop	SP 9*E	
	Michelin	XT 2	
	Goodyear	GT 2E	
	Firestone	F 580	
	Pirelli	P 3000	
195/65 R 15 91H	Michelin	XH1	
	Dunlop	SP 200 E	
	Goodyear	NCT 5	
195/65 R 15 91V	Continental	Eco Contact CP	
	Goodyear	NCT 5	
	Michelin	Primacy	
	Dunlop	SP Sport 200 E	
	Pirelli	P 6000	



Tyre size	Make	Tread pattern	Remarks
	Kleber	Dynaxer HP	Low-friction tyres
	Firestone	FH 680 B	
	Dunlop	SP Sport 200 ULW (ultra light weight)	
205/55 R 16 91W	Continental	Sport Contact	These tyres are permitted only in conjunction with modified full-size hubcaps, in use from 11.99; Also see => Technical Service Handbook
	Dunlop	SP Sport 2000 E	
	Bridgestone	ER 30	
	Michelin	MXM	
	Goodyear	NCT 5	
	Pirelli	P 6000	
225/45 R 17 91W/Y	Continental	Sport Contact	
	Dunlop	SP 9090	
	Pirelli	P 6000	
	Michelin	Pilot Sport	
	Bridgestone	Potenza RE 040	
	Goodyear	NCT 5	

52.19 Summer tyres for Golf model year 2004 to model year 2009

Observe the notes regarding the recommended makes of summer tyres => [page 458](#)

Tyre size	Make	Tread pattern	Remarks	
195/65 R 15 91T	Goodyear	GT 3		
	Michelin	Energy 3		
	Hankook	K406		
	Continental	CEC3		
195/65 R 15 91H	Pirelli	P 7		
	Michelin	Energy 3		
	Goodyear	NCT 5		
	Hankook	K405		
	Bridgestone	B 390		
	Bridgestone	ER 300		
	Continental	Eco Contact 3		
	Michelin	MXV4 S8		For USA Tyres with run-flat properties => page 54
	Goodyear	Eagle LS		
	Continental	Pro Contact		
195/65 R 15 91V	Pirelli	P 6000		
	Goodyear	NCT 5		
	Michelin	Energy 3		
	Bridgestone	B 390		
	Bridgestone	ER 300		
	Continental	Premium Contact		



Tyre size	Make	Tread pattern	Remarks
205/55 R 16 91H	Michelin	MXV4 S8	For USA Tyres with run-flat properties ⇒ page 54
	Goodyear	Eagle LS	
	Bridgestone	EL 400	
	Continental	Pro Contact	
	Hankook	Optima H725H	
205/55 R 16 91V	Pirelli	P 7	Tyres with run-flat properties ⇒ page 54
	Hankook	K105	
	Goodyear	NCT 5	
	Bridgestone	ER 30	
	Bridgestone	ER 300	
	Michelin	Energy 3	
	Continental	Sport Contact 2	
	Dunlop	Sport 01A	
205/55 R 16 91W	Bridgestone	ER 300 RFT	Tyres with run-flat properties ⇒ page 54
	Pirelli	P 7	
	Goodyear	NCT 5	
	Bridgestone	ER 30	
225/45 R 17 91W	Bridgestone	ER 300	
	Bridgestone	ER 30	
	Michelin	Primacy	
	Continental	Sport Contact 2	
	Dunlop	SP Sport 01A	
225/45 R 17 91H	Pirelli	P Zero Rosso	For USA Tyres with run-flat properties ⇒ page 54
	Michelin	MXM 4	
	Goodyear	Eagle RSA	
225/45 R 17 94W	Continental	Pro Contact	
	Michelin	Primacy	
225/40 R 18 92H	Pirelli	P Zero Rosso	For USA
	Dunlop	Sport01 AS	
225/40 R 18 92Y	Pirelli	P Zero Nero	
	Bridgestone	RE 050A	
	Michelin	Exalto 2	
	Dunlop	SportMaxx	
	Continental	Sport Contact 2	

52.20 Summer tyres for Golf BlueMotion model year 2008 to model year 2009

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
195/65 R 15 91T	Continental	Eco Contact 3
205/55 R 16 91H	Continental	Premium Contact 2



52.21 Summer tyres for Golf GTI model year 2005 to model year 2009

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
225/45 R 17 91W	Bridgestone	RE 40
	Bridgestone	RE 50
	Michelin	Primacy
	Continental	Sport Contact 2
	Dunlop	SP Sport 01A
	Pirelli	P Zero Rosso
225/40 R 18 92Y	Bridgestone	RE 050A
	Michelin	Exalto 2
	Dunlop	SportMaxx
	Continental	Sport Contact 2
	Pirelli	P Zero

52.22 Summer tyres for Pirelli Golf model year 2008 to model year 2009

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
225/45 R 17 91W	Bridgestone	RE 40
	Bridgestone	RE 50
	Michelin	Primacy
	Continental	Sport Contact 2
	Dunlop	SP Sport 01A
	Pirelli	P Zero Rosso
225/40 R 18 92Y	Bridgestone	RE 050A
	Michelin	Exalto 2
	Dunlop	SportMaxx
	Continental	Sport Contact 2
	Pirelli	P Zero

52.23 Summer tyres for Golf R32 model year 2006 to model year 2009

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
225/45 R 17 94W	Michelin	Primacy
	Pirelli	P Zero Rosso
225/40 R 18 92Y	Bridgestone	RE 050A
	Michelin	Exalto 2
	Dunlop	SportMaxx
	Continental	Sport Contact 2
	Pirelli	P Zero



52.24 Summer tyres for CrossGolf from model year 2007

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern	Remarks
195/65 R 15 91T	Goodyear	GT 3	
	Michelin	Energy 3	
	Hankook	K406	
	Continental	CEC3	
195/65 R 15 91H	Pirelli	P 7	For USA Tyres with run-flat properties ⇒ page 54
	Michelin	Energy 3	
	Goodyear	NCT 5	
	Hankook	K405	
	Bridgestone	B 390	
	Bridgestone	ER 300	
	Continental	Eco Contact 3	
	Michelin	MXV4 S8	
	Goodyear	Eagle LS	
	Continental	Pro Contact	
195/65 R 15 91V	Pirelli	P 6000	
	Goodyear	NCT 5	
	Michelin	Energy 3	
	Bridgestone	B 390	
	Bridgestone	ER 300	
	Continental	Premium Contact	
205/55 R 16 91H	Michelin	MXV4 S8	For USA Tyres with run-flat properties ⇒ page 54
	Goodyear	Eagle LS	
	Bridgestone	EL 400	
	Continental	Pro Contact	
	Hankook	Optima H725H	
205/55 R 16 91V	Pirelli	P 7	
	Hankook	K105	
	Goodyear	NCT 5	
	Bridgestone	ER 30	
	Bridgestone	ER 300	
	Michelin	Energy 3	
	Continental	Sport Contact 2	
	Dunlop	Sport 01A	
Bridgestone	ER 300 RFT	Tyres with run-flat properties ⇒ page 54	
205/55 R 16 91W	Pirelli	P 7	
	Goodyear	NCT 5	
	Bridgestone	ER 30	
	Bridgestone	ER 300	
225/45 R 17 91W	Bridgestone	RE 40	
	Bridgestone	RE 50	
	Michelin	Primacy	
	Continental	Sport Contact 2	



Tyre size	Make	Tread pattern	Remarks
	Dunlop	SP Sport 01A	
	Pirelli	P Zero Rosso	
225/45 R 17 94W	Michelin	Primacy	
	Pirelli	P Zero Rosso	

52.25 Summer tyres for Golf Plus from model year 2005

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern	Remarks	
195/65 R 15 91T	Goodyear	GT 3		
	Michelin	Energy 3		
	Hankook	K406		
	Continental	CEC3		
195/65 R 15 91H	Pirelli	P 7		
	Michelin	Energy 3		
	Goodyear	NCT 5		
	Hankook	K405		
	Bridgestone	B 390		
	Bridgestone	ER 300		
	Continental	Eco Contact 3		
	Michelin	MXV4 S8		For USA Tyres with run-flat properties ⇒ page 54
	Goodyear	Eagle LS		
Continental	Pro Contact			
195/65 R 15 91V	Pirelli	P 6000		
	Goodyear	NCT 5		
	Michelin	Energy 3		
	Bridgestone	B 390		
	Bridgestone	ER 300		
	Continental	Premium Contact		
205/55 R 16 91H	Michelin	MXV4 S8	For USA Tyres with run-flat properties ⇒ page 54	
	Goodyear	Eagle LS		
	Bridgestone	EL 400		
	Continental	Pro Contact		
	Hankook	Optima H725H		
205/55 R 16 91V	Pirelli	P 7		
	Hankook	K105		
	Goodyear	NCT 5		
	Bridgestone	ER 30		
	Bridgestone	ER 300		
	Michelin	Energy 3		
	Continental	Sport Contact 2		
	Dunlop	Sport 01A		
	Bridgestone	ER 300 RFT		Tyres with run-flat properties ⇒ page 54
205/55 R 16 91W	Pirelli	P 7		



Tyre size	Make	Tread pattern	Remarks
225/45 R 17 91W	Goodyear	NCT 5	
	Bridgestone	ER 30	
	Bridgestone	ER 300	
	Bridgestone	RE 40	
	Bridgestone	RE 50	
	Michelin	Primacy	
	Continental	Sport Contact 2	
	Dunlop	SP Sport 01A	
225/45 R 17 94W	Michelin	Primacy	
	Pirelli	P Zero Rosso	
225/40 R 18 92T	Dunlop	Sport01 AS	For USA
	Pirelli	P Zero Nero	
225/40 R 18 92Y	Bridgestone	RE 050A	
	Michelin	Exalto 2	
	Dunlop	SportMaxx	
	Continental	Sport Contact 2	
	Pirelli	P Zero	

52.26 Summer tyres for Golf Plus BlueMotion from model year 2008

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
195/65 R 15 91T	Continental	Eco Contact 3
205/55 R 16 91H	Continental	Premium Contact 2

52.27 Summer tyres Bora, Bora 4Motion model year 1999 to model year 2005

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern	Remarks
195/65 R 15 91T	Continental	Eco Contact EP	
	Dunlop	SP 9*E	
	Michelin	XT 2	
	Goodyear	GT 2E	
	Firestone	F 580	
	Pirelli	P 3000	
195/65 R 15 91H	Michelin	XH1	
	Dunlop	SP 200 E	
	Goodyear	NCT 5	
195/65 R 15 91V	Continental	Eco Contact CP	
	Goodyear	NCT 5	
	Michelin	Primacy	
	Dunlop	SP Sport 200 E	
	Pirelli	P 6000	



Tyre size	Make	Tread pattern	Remarks
	Kleber	Dynaxer HP	Low-friction tyres
	Firestone	FH 680 B	
	Dunlop	SP Sport 200 ULW (ultra light weight)	
205/55 R 16 91W	Continental	Sport Contact	These tyres are permitted only in conjunction with modified full-size hubcaps, in use from 11.99; Also see ⇒ Technical Service Handbook
	Dunlop	SP Sport 2000 E	
	Bridgestone	ER 30	
	Michelin	MXM	
	Goodyear	NCT 5	
	Pirelli	P 6000	
225/45 R 17 91W	Continental	Sport Contact	
	Dunlop	SP 9090	
	Pirelli	P 6000	
	Michelin	Pilot Sport	
	Bridgestone	Potenza RE 040	
	Goodyear	NCT 5	

52.28 Summer tyres Golf estate, Golf estate 4Motion model year 1999 to model year 2006, Bora estate, Bora estate 4Motion model year 1999 to model year 2005

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern	Remarks
195/65 R 15 91T	Continental	Eco Contact EP	
	Dunlop	SP 9*E	
	Michelin	XT 2	
	Goodyear	GT 2E	
	Firestone	F 580	
	Pirelli	P 3000	
195/65 R 15 91H	Michelin	XH1	
	Dunlop	SP 200 E	
	Goodyear	NCT 5	
195/65 R 15 91V	Continental	Eco Contact CP	
	Goodyear	NCT 5	
	Michelin	Primacy	
	Dunlop	SP Sport 200 E	
	Pirelli	P 6000	
	Kleber	Dynaxer HP	
	Firestone	FH 680 B	
Dunlop	SP Sport 200 ULW (ultra light weight)	Low-friction tyres	
205/55 R 16 91W	Continental	Sport Contact	These tyres are permitted only in conjunction with modified full-size hubcaps, in use from 11.99;



Tyre size	Make	Tread pattern	Remarks
	Dunlop	SP Sport 2000 E	Also see ⇒ Technical Service Handbook
	Bridgestone	ER 30	
	Michelin	MXM	
	Goodyear	NCT 5	
	Pirelli	P 6000	
225/45 R 17 91W/Y	Continental	Sport Contact	
	Dunlop	SP 9090	
	Pirelli	P 6000	
	Michelin	Pilot Sport	
	Bridgestone	Potenza RE 040	
	Goodyear	NCT 5	

52.29 Summer tyres for Golf R32

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
225/45 R 17 91W/Y	Continental	Sport Contact
	Dunlop	SP 9090
	Pirelli	P 6000
	Michelin	Pilot Sport
	Bridgestone	Potenza RE 040
	Goodyear	NCT 5
225/40 R 18 88Y	Michelin	Pilot Sport
	Dunlop	SP 9000

52.30 Summer tyres for Golf Anniversary GTI

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
205/55 R 16 91W	Continental	Sport Contact
	Dunlop	SP Sport 2000 E
	Bridgestone	ER 30
	Michelin	MXM
	Goodyear	NCT 5
	Pirelli	P 6000
225/45 R 17 91W/Y	Continental	Sport Contact
	Dunlop	SP 9090
	Pirelli	P 6000
	Michelin	Pilot Sport
	Bridgestone	Potenza RE 040
	Goodyear	NCT 5
225/40 R 18 88Y	Michelin	Pilot Sport
	Dunlop	SP 9000



Tyre size	Make	Tread pattern
225/40 R 18 92Y XL	Goodyear	Eagle F1

52.31 Summer tyres Golf Variant model year 2007 to model year 2010

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern	Remarks
195/65 R 15 91T	Goodyear	GT 3	
	Michelin	Energy 3	
	Michelin	Energy Saver	
	Hankook	K406	
	Continental	CEC3	
195/65 R 15 91H	Pirelli	P 7	
	Michelin	Energy 3	
	Michelin	Energy Saver	
	Goodyear	NCT 5	
	Hankook	K405	
	Bridgestone	B 390	
	Bridgestone	ER 300	
Continental	Eco Contact 3		
195/65 R 15 91V	Pirelli	P 6000	
	Goodyear	NCT 5	
	Michelin	Energy 3	
	Michelin	Energy Saver	
	Bridgestone	B 390	
	Bridgestone	ER 300	
	Continental	Premium Contact	
205/55 R 16 91V	Pirelli	P 7	
	Hankook	K105	
	Goodyear	NCT 5	
	Bridgestone	ER 30	
	Bridgestone	ER 300	
	Michelin	Energy 3	
	Michelin	Energy Saver	
	Continental	Sport Contact 2	
	Dunlop	Sport 01A	
	Bridgestone	ER 300 RFT	
205/55 R 16 91W	Pirelli	P 7	
	Goodyear	NCT 5	
	Bridgestone	ER 30	
	Bridgestone	ER 300	
225/45 R 17 91W	Bridgestone	RE 40	
	Bridgestone	RE 50	
	Michelin	Primacy	
	Continental	Sport Contact 2	



Tyre size	Make	Tread pattern	Remarks
	Dunlop	SP Sport 01A	
	Pirelli	P Zero Rosso	
225/45 R 17 94W	Michelin	Primacy	
	Pirelli	P Zero Rosso	
225/40 R 18 92Y	Bridgestone	RE 050A	
	Michelin	Exalto 2	
	Dunlop	SportMaxx	
	Continental	Sport Contact 2	
	Pirelli	P Zero	

52.32 Summer tyres for Golf Variant BlueMotion from model year 2008

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
195/65 R 15 91T	Continental	Eco Contact 3
	Michelin	Energy Saver
205/55 R 16 91H	Continental	Premium Contact 2
	Michelin	Energy Saver

52.33 Summer tyres Golf cabriolet model year 1998 to model year 2002

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern	Remarks
175/80 R 14 88T	Michelin	XT 1	
	Firestone	F 580-FS	
	Continental	Eco Contact EP	
	Goodyear	GT2E	
	Dunlop	SP 10 3e	
175/80 R 14 88H	Dunlop	SP Sport 200 E	
	Firestone	F 580	
	Continental	Eco Contact CP	
	Michelin	XH1	
	Toyo	TYJ35	
195/65 R 15 91T	Dunlop	SP Sport 200 ULW (ultra light weight)	Low-friction tyres
	Continental	Eco Contact EP	
	Dunlop	SP 9*E	
	Michelin	XT 2	
	Goodyear	GT 2E	
	Firestone	F 580	
195/65 R 15 91H	Pirelli	P 3000	
	Michelin	XH1	
	Dunlop	SP 200 E	
	Goodyear	NCT 5	



Tyre size	Make	Tread pattern	Remarks
195/65 R 15 91V	Continental	Eco Contact CP	
	Goodyear	NCT 5	
	Michelin	Primacy	
	Dunlop	SP Sport 200 E	
	Pirelli	P 6000	
	Kleber	Dynaxer HP	
	Firestone	FH 680 B	
205/55 R 16 91W	Dunlop	SP Sport 200 ULW (ultra light weight)	Low-friction tyres
	Continental	Sport Contact	These tyres are permitted only in conjunction with modified full-size hubcaps, in use from 11.99;
	Dunlop	SP Sport 2000 E	
	Bridgestone	ER 30	
	Michelin	MXM	
	Goodyear	NCT 5	
	Pirelli	P 6000	
225/45 R 17 91W/Y	Continental	Sport Contact	
	Dunlop	SP 9090	
	Pirelli	P 6000	
	Michelin	Pilot Sport	
	Bridgestone	Potenza RE 040	
	Goodyear	NCT 5	

52.34 Summer tyres for New Beetle RSi

Observe the notes regarding the recommended makes of summer tyres => [page 458](#)

Tyre size	Make	Tread pattern
235/40 ZR 18 91W	Michelin	Pilot Sport

52.35 Summer tyres Passat model year 1994 to model year 1997

Observe the notes regarding the recommended makes of summer tyres => [page 458](#)

Tyre size	Make	Tread pattern
185/65 R 14 86T	Dunlop	SP 9
	Continental	CT 22
	Uniroyal	R380/65
	Firestone	F 560
195/60 R 14 86H	Michelin	HX MXV 3A
	Dunlop	SP Sport D8M2
	Continental	CH 90
	Firestone	FH 690
205/50 R 15 86V	Firestone	FH 690



Tyre size	Make	Tread pattern
	Dunlop	SP Sport 2000
	Michelin	HX MXV 3A
	Continental	CV 90
	Fulda	Y 2000 +
205/50 R 15 86W	Michelin	HX MXV 3A
	Dunlop	SP Sport 2000

52.36 Summer tyres Passat model year 1997 to model year 2005

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern	Remarks
195/65 R 15 91T	Dunlop	SP9 E	
	Michelin	XT 2	
	Continental	Eco Contact EP	
	Goodyear	GT 2E	
	Firestone	F 580	
	Pirelli	P 3000	
195/65 R 15 91H	Michelin	XH1	
	Dunlop	SP 200 E	
	Goodyear	NCT 5	
195/65 R 15 91V	Continental	Eco Contact CP	
	Goodyear	Eagle NCT 5	
	Michelin	Primacy	
	Dunlop	SP Sport 200 E	
	Pirelli	P 6000	
	Firestone	FH 680 B	
205/60 R 15 91V	Dunlop	SP Sport 200 ULW (ultra light weight)	Low-friction tyres
	Michelin	Primacy	
	Michelin	MXV 3A	
	Continental	Eco Contact CP	
205/55 R 16 91W	Continental	Sport Contact	
	Bridgestone	ER 30	
	Dunlop	SP Sport 2000 E	
	Michelin	MXM	
	Goodyear	NCT 3	
	Goodyear	NCT 5	
	Pirelli	P 6000	
225/45 R 17 91Y	Michelin	Primacy	
	Bridgestone	Potenza	
	Continental	Sport C2	



52.37 Summer tyres for Passat W8

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern	Remarks
215/55 R 16 93Y	Michelin	Primacy	Only for USA
	Dunlop	SP 9000	
225/45 R 17 91Y	Bridgestone	Potenza	
	Michelin	Primacy	
	Continental	Sport C2	

52.38 Summer tyres for Passat Protect

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
205/55 R 16 93W XL	Dunlop	SP Sport 2000 E
205/55 R 16 97W/Y XL	Dunlop	SP Sport 9000
215/55 R 16 93Y XL	Dunlop	SP Sport 9000

XL means „Extra Load“ ⇒ [page 16](#)

52.39 Summer tyres for Sharan from model year 1996

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
195/65 R 15 95T reinforced	Continental	CT 22
	Firestone	F 570
205/60 R 15 95H	Continental	CH 90
Only 16" tyres are permitted for vehicles from model year 2002		
195/60 R 16 C 99/97H	Dunlop	SP Sport 200
	Bridgestone	ER 30C
	Michelin	Agilis 51
205/55 R 16 C 98/96H	Bridgestone	ER 30C
215/55 R 16 95H reinforced	Dunlop	SP Sport 2020 E
	Michelin	Pilot HXMXM
	Continental	CEC CP
	Firestone	FH 700
215/55 R 16 95W reinforced	Dunlop	SP Sport 2020 E
	Michelin	Pilot HXMXM
	Continental	CEC CP
	Firestone	FH 700
215/55 R 16 97H reinforced	Michelin	Pilot HXMXM
	Firestone	FH 700
215/55 R 16 97W reinforced	Michelin	Pilot HXMXM
	Firestone	FH 700



Tyre size	Make	Tread pattern
225/45 R 17 94W reinforced	Michelin	Pilot Primacy
	Dunlop	SP Sport 01A

52.40 Summer tyres for Sharan BlueMotion from model year 2009

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
195/60 R 16 C 99/97H	Bridgestone	ER 30C

52.41 Summer tyres for Touareg model year 2008 to model year 2010

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
235/65 R 17,108V	Bridgestone	Dueler HP
	Michelin	4x4 Diamaris
255/60 R 17,106V	Michelin	4x4 Diamaris
	Pirelli	Pzero Rosso
	Goodyear	Wrangler F1 WRL2
255/55 R 18 109Y XL	Bridgestone	Dueler HP Sport
	Michelin	Latitude Sport
275/45 ZR 19 108Y XL	Pirelli	Pzero Rosso
275/45 R 19 108Y XL	Michelin	Latitude Sport
	Bridgestone	Dueler HP Sport
	Yokohama	Advant Sport NO
275/40 R 20 106Y XL	Pirelli	Pzero Rosso
	Michelin	4x4 Diamaris
	Bridgestone	Dueler HP Sport
	Yokohama	Advant Sport NO

XL means „Extra Load“ Notes ⇒ [page 16](#)

52.42 Summer tyres for Touareg R50 model year 2008 to model year 2010

Observe the notes regarding the recommended makes of summer tyres ⇒ [page 458](#)

Tyre size	Make	Tread pattern
275/40 R 20 106Y XL	Pirelli	Pzero Rosso
	Michelin	4x4 Diamaris
	Bridgestone	Dueler HP Sport
	Yokohama	Advant Sport NO
295/35 R 21 107Y XL	Michelin	NO Latitude Sport
	Dunlop	SP Sport Maxx
	Yokohama	Advant Sport NO



XL means „Extra Load“ Notes ⇒ [page 16](#)





53 Recommended all-season tyres

Notes regarding the recommended makes of all-season tyre

- ◆ Tyres are one of the most important elements in motor vehicle construction and have a major influence on road safety. Therefore, they must fulfil numerous conditions which are specified for tyre manufacturers in the DIN (German industrial standards) and the directives of the German rubber industry e. V. (W.d.K.). In addition, comprehensive testing is carried out at Volkswagen before tyres are approved for initial fitting on our vehicles.
- ◆ The following lists all tyre makes and tread patterns that are fitted to VW vehicles ex-factory, correct at the time of publication.
- ◆ These tyre makes/tread patterns meet the aforementioned demands. We therefore recommend the tyres/tread types listed in this guide are chosen as replacements.
- ◆ Observe special requirements for tyres with run-flat properties
⇒ [page 54](#) .

53.1 All-season tyres Lupo model year 1999 to model year 2005

Observe the notes regarding the recommended makes of all-season tyres ⇒ [page 481](#)

Tyre size	Make	Tread pattern
155/70 R 13 75T	Dunlop	SP All Season M2
175/65 R 13 80T	Dunlop	SP All Season M2

53.2 All-season tyres Polo model year 1995 to model year 2001

Observe the notes regarding the recommended makes of all-season tyres ⇒ [page 481](#)

Tyre size	Make	Tread pattern
155/70 R 13 75T	Dunlop	SP All Season M2 (for Europe)
175/65 R 13 80T	Dunlop	SP All Season M2 (for Europe)
	Continental	TS 755

53.3 All-season tyres for Polo from model year 2002

Observe the notes regarding the recommended makes of all-season tyres ⇒ [page 481](#)

Tyre size	Make	Tread pattern
165/70 R 14 81T	Goodyear	Vector 5
185/60 R 14 82H	Dunlop	SP All Season M2
	Goodyear	Eagle Vector EV2



53.4 All-season tyres Polo saloon/sedan model year 2004 to model year 2005

Observe the notes regarding the recommended makes of all-season tyres ⇒ [page 481](#)

Tyre size	Make	Tread pattern
165/70 R 14 81T	Goodyear	Vector 3
185/60 R 14 82H	Dunlop	SP All Season M2
	Goodyear	Eagle Vector

53.5 All-season tyres Golf, Vento model year 1992 to model year 1998

Observe the notes regarding the recommended makes of all-season tyres ⇒ [page 481](#)

Tyre size	Make	Tread pattern	Remarks
175/70 R 13 82T	Dunlop	SP All Season M2	
185/60 R 14 82H	Dunlop	SP All Season M2	For Europe
195/60 R 14 86H	Dunlop	All Season M2	
	Goodyear	Eagle GA	For USA
	Goodrich	Comp T/A	
205/50 R 15 86H	Goodyear	Eagle GA	For USA

53.6 All-season tyres Golf estate model year 1994 to model year 1998

Observe the notes regarding the recommended makes of all-season tyres ⇒ [page 481](#)

Tyre size	Make	Tread pattern	Remarks
175/70 R 13 82T	Dunlop	SP All Season M2	
185/60 R 14 82H	Dunlop	SP All Season M2	For Europe
195/60 R 14 86H	Dunlop	All Season M2	
	Goodyear	Eagle GA	For USA
	Goodrich	Comp T/A	
205/50 R 15 86H	Goodyear	Eagle GA	For USA

53.7 All-season tyres Golf cabriolet model year 1994 to model year 1997

Observe the notes regarding the recommended makes of all-season tyres ⇒ [page 481](#)

Tyre size	Make	Tread pattern	Remarks
185/60 R 14 82H	Dunlop	SP All Season M2	For Europe

53.8 All-season tyres Golf, Golf 4Motion model year 1998 to model year 2004

Observe the notes regarding approved makes of all-season tyres for initial fitting ⇒ [page 481](#)

Tyre size	Make	Tread pattern	Remarks
175/80 R 14 88H	Dunlop	SP All Season M2	
195/65 R 15 91H	Dunlop	SP All Season M2	For Europe



Tyre size	Make	Tread pattern	Remarks
	Continental	CH 95	For USA
	Michelin	MXV4 Plus	
	Goodyear	Eagle LS	
205/55 R 16 91H	Continental	CH 95	
	Goodyear	Eagle RSA	
	Michelin	MXV4 Plus	
225/45 R 17 91H	Michelin	MXM	For USA
	Goodyear	Eagle RSA	
225/45 R 17 94H XL	Michelin	MXM	For USA

53.9 All-season tyres for Golf model year 2004 to model year 2009

Observe the notes regarding the recommended makes of all-season tyres ⇒ [page 481](#)

Tyre size	Make	Tread pattern	Remarks	
195/65 R 15 91H	Dunlop	AS M2		
	Goodyear	Vector EV2		
	Michelin	MXV 4 S8		For USA
	Goodyear	Eagle LS		
	Continental	Pro Contact		
205/55 R 16 91H	Michelin	MXV 4 S8	For USA	
	Goodyear	Eagle LS		
	Continental	Pro Contact		
	Bridgestone	EL 400		
	Hankook	Optima H725H		
205/55 R 16 94V	Goodyear	Vector 2		
225/45 R 17 91H	Michelin	MXM 4	For USA	
	Continental	Pro Contact		
	Goodyear	Eagle RSA		

53.10 All-season tyres for CrossGolf from model year 2007

Observe the notes regarding the recommended makes of all-season tyres ⇒ [page 481](#)

Tyre size	Make	Tread pattern	Remarks	
195/65 R 15 91H	Dunlop	AS M2		
	Goodyear	Vector EV2		
	Michelin	MXV 4 S8		For USA
	Goodyear	Eagle LS		
	Continental	Pro Contact		
205/55 R 16 91H	Michelin	MXV 4 S8	For USA	
	Goodyear	Eagle LS		
	Continental	Pro Contact		
	Bridgestone	EL 400		
	Hankook	Optima H725H		
205/55 R 16 94V	Goodyear	Vector 2		



Tyre size	Make	Tread pattern	Remarks
225/45 R 17 91H	Michelin	MXM 4	For USA
	Continental	Pro Contact	
	Goodyear	Eagle RSA	

53.11 All-season tyres for Golf Plus from model year 2005

Observe the notes regarding the recommended makes of all-season tyres ⇒ [page 481](#)

Tyre size	Make	Tread pattern	Remarks
195/65 R 15 91H	Dunlop	AS M2	For USA
	Goodyear	Vector EV2	
	Michelin	MXV 4 S8	
	Goodyear	Eagle LS	
	Continental	Pro Contact	
205/55 R 16 91H	Michelin	MXV 4 S8	For USA
	Goodyear	Eagle LS	
	Continental	Pro Contact	
	Hankook	Optima H725H	
205/55 R 16 94V	Goodyear	Vector 2	
225/45 R 17 91H	Michelin	MXM 4	For USA
	Continental	Pro Contact	
	Goodyear	Eagle RSA	

53.12 All-season tyres Bora, Bora 4Motion model year 1999 to model year 2005

Observe the notes regarding the recommended makes of all-season tyres ⇒ [page 481](#)

Tyre size	Make	Tread pattern	Remarks
195/65 R 15 91H	Dunlop	SP All Season M2	For Europe
	Continental	CH 95	For USA
	Michelin	MXV4 Plus	
	Goodyear	Eagle LS	
205/55 R 16 91H	Continental	CH 95	
	Goodyear	Eagle RSA	
	Michelin	MXV4 Plus	For Japan
225/45 R 17 91H	Michelin	MXM	For USA
	Goodyear	Eagle RSA	
225/45 R 17 94H XL	Michelin	MXM	For USA



53.13 All-season tyres Golf estate, Golf estate 4Motion model year 1999 to model year 2006, Bora estate, Bora estate 4Motion model year 1999 to model year 2005

Observe the notes regarding the recommended makes of all-season tyres ⇒ [page 481](#)

Tyre size	Make	Tread pattern	Remarks
195/65 R 15 91H	Dunlop	SP All Season M2	For Europe
	Continental	CH 95	For USA
	Michelin	MXV4 Plus	
	Goodyear	Eagle LS	
205/55 R 16 91H	Continental	CH 95	
	Goodyear	Eagle RSA	
	Michelin	MXV4 Plus	For Japan
225/45 R 17 91H	Michelin	MXM	For USA
	Goodyear	Eagle RSA	
225/45 R 17 94H XL	Michelin	MXM	For USA

53.14 All-season tyres Golf Variant model year 2007 to model year 2010

Observe the notes regarding the recommended makes of all-season tyres ⇒ [page 481](#)

Tyre size	Make	Tread pattern	Remarks
195/65 R 15 91H	Dunlop	AS M2	
	Goodyear	Vector EV2	
	Michelin	MXV 4 S8	For USA
	Goodyear	Eagle LS	
	Continental	Pro Contact	
205/55 R 16 91H	Michelin	MXV 4 S8	For USA
	Goodyear	Eagle LS	
	Continental	Pro Contact	
	Bridgestone	EL 400	
	Hankook	Optima H725H	
205/55 R 16 94V	Goodyear	Vector 2	
225/45 R 17 91H	Michelin	MXM 4	For USA
	Continental	Pro Contact	
	Goodyear	Eagle RSA	

53.15 All-season tyres Golf cabriolet model year 1998 to model year 2002

Observe the notes regarding the recommended makes of all-season tyres ⇒ [page 481](#)

Tyre size	Make	Tread pattern	Remarks
175/80 R 14 88H	Dunlop	SP All Season M2	
195/65 R 15 91H	Dunlop	SP All Season M2	
205/55 R 16 91H	Continental	CH 95	
	Goodyear	Eagle RSA	



Tyre size	Make	Tread pattern	Remarks
	Michelin	MXV4 Plus	For Japan
225/45 R 17 91H	Michelin	MXM	For USA

53.16 All-season tyres Passat model year 1997 to model year 2005

Observe the notes regarding the recommended makes of all-season tyres ⇒ [page 481](#)

Tyre size	Make	Tread pattern	Remarks
195/65 R 15 91H	Dunlop	SP All Season M2	For Europe
	Continental	CH 95	For USA
	Michelin	MXV4 Plus	
	Goodyear	Eagle LS	
205/55 R 16 91H	Continental	CH 95	
	Goodyear	Eagle RSA	
	Michelin	MXV4 Plus	For Japan
225/45 R 17 94H XL	Michelin	MXM	For USA

53.17 All-season tyres for Passat W8

Observe the notes regarding the recommended makes of all-season tyres ⇒ [page 481](#)

Tyre size	Make	Tread pattern	Remarks
215/55 R 16 93H	Continental	CH 95	For USA
215/55 R 16 97H XL	Continental	CH 95	For USA
	Michelin	MXM 4	


XL means „Extra Load“ ⇒ [page 16](#)

53.18 All-season tyres for Touareg model year 2003 to model year 2010

Observe the notes regarding the recommended makes of all-season tyres ⇒ [page 481](#)

Tyre size	Make	Tread pattern	Remarks
235/70 R 16 105H	Goodyear	Wrangler HP	
235/65 R 17 108H	Continental	4x4 Contact	
255/60 R 17 106H	Pirelli	Scorpion A/T	
	Dunlop	SP Sport 5000	For USA
	Goodyear	Eagle LS2	
	Pirelli	Scorpion STR	
255/55 R 18 109H XL	Michelin	Latitude Tour HP	For USA
	Goodyear	Eagle LS2	
	Pirelli	Scorpion STR	
255/55 R 18,109V XL	Pirelli	Scorpion STR	
275/45 R19 108V XL	Michelin	Latitude Tour HP	
	Goodyear	Eagle LS2	

XL means „Extra Load“ Notes ⇒ [page 16](#)

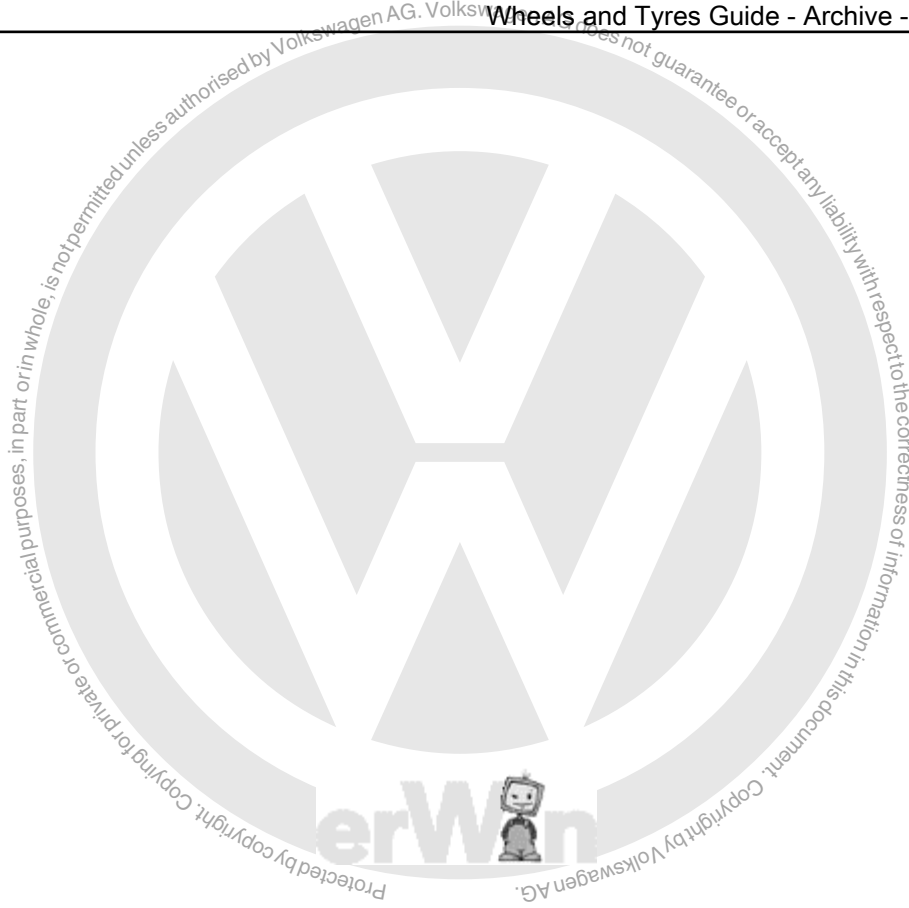



54 Recommended winter tyres

Notes regarding the recommended makes of winter tyre

- ◆ Tyres are one of the most important elements in motor vehicle construction and have a major influence on road safety. Therefore, they must fulfil numerous conditions which are specified for tyre manufacturers in the DIN (German industrial standards) and the directives of the German rubber industry e. V. (W.d.K.). In addition, comprehensive testing is carried out at Volkswagen before tyres are approved for initial fitting on our vehicles.
- ◆ The following lists all tyre makes and tread patterns that are fitted to VW vehicles ex-factory, correct at the time of publication.
- ◆ These tyre makes/tread patterns meet the aforementioned demands. We therefore recommend the tyres/tread types listed in this guide are chosen as replacements.
- ◆ Observe special requirements for tyres with run-flat properties
⇒ [page 54](#) .

54.1 Winter tyres Lupo 3L model year 1999 to model year 2005

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
155/65 R 14 75T	Continental	TS 760 Winter Contact
	Dunlop	SP Winter Sport M2
	Michelin	Alpin

54.2 Winter tyres Lupo FSI model year 1999 to model year 2005

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
155/65 R 14 75T	Continental	TS 760 Winter Contact
	Dunlop	SP Winter Sport M2
	Michelin	Alpin

54.3 Winter tyres Lupo GTI model year 1999 to model year 2005

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
185/55 R 14 78T	Continental	TS 760
	Dunlop	SP Winter Sport M2
	Michelin	Alpin



54.4 Winter tyres Lupo model year 1999 to model year 2005

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
155/70 R 13 75Q	Goodyear	Ultra Grip 5
	Michelin	Alpin
155/70 R 13 75S	Vredestein	Snowtrac
155/70 R 13 75T	Continental	TS 780
	Kleber	Krisalp 3
175/65 R 13 80Q	Goodyear	Ultra Grip 5
175/65 R 13 80T	Dunlop	SP Winter Sport M2
	Vredestein	Snowtrac
185/55 R 14 78T	Continental	TS 760
	Dunlop	Winter Sport M2
	Michelin	Alpin

54.5 Winter tyres Polo model year 1995 to model year 2001

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
155/70 R 13 75Q	Goodyear	Ultra Grip 5
	Michelin	Alpin
155/70 R 13 75S	Vredestein	Snowtrac
155/70 R 13 75T	Continental	TS 780
	Kleber	Krisalp 3
175/65 R 13 80Q	Goodyear	Ultra Grip 5
175/65 R 13 80T	Dunlop	SP Winter Sport M2
	Vredestein	Snowtrac
185/55 R 14 78T	Continental	TS 760
	Dunlop	Winter Sport M2
	Michelin	Alpin

54.6 Winter tyres for Polo from model year 2002

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
155/80 R 13 79Q	Continental	TS 760 Winter Contact
	Dunlop	SP Winter Sport M2
165/70 R 14 81T	Continental	TS 780 Winter Contact
	Dunlop	SP Winter Sport M3
	Michelin	Alpin
	Pirelli	V190 Snowcontrol
	Goodyear	Ultra Grip 7
185/60 R 14 82T	Goodyear	Ultra Grip 7



Tyre size	Make	Tread pattern
	Continental	TS 780 Winter Contact
	Vredestein	Snowtrac 2
	Dunlop	Winter Sport M3
	Pirelli	V190 Snowcontrol
	Michelin	Alpin 2
185/55 R 15 82T	Dunlop	SP Winter Sport M2
185/55 R 15 84T	Dunlop	SP Winter Sport M3
	Continental	TS 800
	Vredestein	Snowtrac 2

54.7 Winter tyres for Polo Fun model year 2004 to model year 2006

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
185/60 R 15 84T	Dunlop	SP Winter Sport M3
	Continental	TS 800
	Vredestein	Snowtrac 2

54.8 Winter tyres for CrossPolo from model year 2006

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
185/60 R 15 84T	Dunlop	SP Winter Sport M3
	Continental	TS 800
	Vredestein	Snowtrac 2

54.9 Winter tyres for Polo BlueMotion from model year 2007

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
165/70 R 14 81T	Continental	TS 780 Winter Contact
	Dunlop	SP Winter Sport M3
	Michelin	Alpin
	Pirelli	V190 Snowcontrol
	Goodyear	Ultra Grip 7

54.10 Winter tyres for Polo GTI from model year 2007

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
185/55 R 15 82T	Dunlop	SP Winter Sport M2



Tyre size	Make	Tread pattern
185/55 R 15 84T	Dunlop	SP Winter Sport M3
	Continental	TS 800
	Vredestein	Snowtrac 2

54.11 Winter tyres for Polo GTI Cup Edition from model year 2007

Information on the recommended winter tyres was not available at time of going to print. Please contact the customer service department of VW R GmbH at the following address - kundenbetreuung@volkswagen-r.de.

54.12 Winter tyres Polo saloon/sedan model year 2004 to model year 2005

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
155/80 R 13 79Q	Continental	TS 760 Winter Contact
	Goodyear	Ultra Grip 5
	Michelin	XM + S Alpin
165/70 R 14 81T	Continental	TS 780 Winter Contact
	Dunlop	SP Winter Sport M2
	Michelin	XM + S Alpin
	Goodyear	Ultra Grip 5
185/60 R 14 82Q/T	Goodyear	Ultra Grip 6
185/55 R 15 82T	Dunlop	SP Winter Sport M2
	Michelin	XM + S Alpin
185/55 R 15 85/86T	Nokian	NRW
	Pirelli	Winter 190

54.13 Winter tyres Polo Classic model year 1996 to model year 2002

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
175/65 R 14 82Q/T	Dunlop	SP Winter Sport M2
	Goodyear	Ultra Grip 5
185/60 R 14 82Q	Michelin	XM + S Alpin
185/60 R 14 82T	Continental	TS 780 Winter Contact
	Goodyear	Ultra Grip 5
	Michelin	Alpin
	Vredestein	Snowtrac
185/60 R 14 82H	Continental	TS 770 Winter Contact



54.14 Winter tyres Polo estate model year 1998 to model year 2002

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
175/65 R 14 82Q/T	Dunlop	SP Winter Sport M2
	Goodyear	Ultra Grip 5
185/60 R 14 82Q	Michelin	XM + S Alpin
185/60 R 14 82T	Continental	TS 780 Winter Contact
	Goodyear	Ultra Grip 5
	Michelin	Alpin
	Vredestein	Snowtrac
185/60 R 14 82H	Continental	TS 770 Winter Contact

54.15 Winter tyres Golf, Vento model year 1992 to model year 1998

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
175/70 R13 82T	Uniroyal	MS + 4
	Goodyear	Ultra Grip 5
	Michelin	XM + S 130
185/60 R 14 82Q	Michelin	XM + S Alpin
185/60 R 14 82T	Continental	TS 780 Winter Contact
	Goodyear	Ultra Grip 5
	Michelin	Alpin
	Vredestein	Snowtrac
185/60 R 14 82H	Continental	TS 770 Winter Contact
185/55 R 15 85T	Continental	TS 770 Winter Contact
	Michelin	XM + S 130
185/55 R 15 82H	Continental	TS 770 Winter Contact
185/60 R 14 86T	Continental	TS 770 Winter Contact
	Michelin	XM + S 130

54.16 Winter tyres Golf estate model year 1994 to model year 1998

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
175/70 R13 82T	Uniroyal	MS + 4
	Goodyear	Ultra Grip 5
	Michelin	XM + S 130
185/60 R 14 82Q	Michelin	XM + S Alpin
185/60 R 14 82T	Continental	TS 780 Winter Contact
	Goodyear	Ultra Grip 5
	Michelin	Alpin
	Vredestein	Snowtrac



Tyre size	Make	Tread pattern
185/60 R 14 82H	Continental	TS 770 Winter Contact
185/55 R 15 85T	Continental	TS 770 Winter Contact
	Michelin	XM + S 130
185/55 R 15 82H	Continental	TS 770 Winter Contact
185/60 R 14 86T	Continental	TS 770 Winter Contact
	Michelin	XM + S 130

54.17 Winter tyres Golf cabriolet model year 1994 to model year 1997

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
175/70 R13 82T	Uniroyal	MS + 4
	Goodyear	Ultra Grip 5
	Michelin	XM + S 130
185/60 R 14 82Q	Michelin	XM + S Alpin
185/60 R 14 82T	Continental	TS 780 Winter Contact
	Goodyear	Ultra Grip 5
	Michelin	Alpin
	Vredestein	Snowtrac
185/60 R 14 82H	Continental	TS 770 Winter Contact
185/60 R 14 86T	Continental	TS 770 Winter Contact
	Michelin	XM + S 130

54.18 Winter tyres Golf, Golf 4Motion model year 1998 to model year 2004

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
175/80 R 14 88Q	Continental	TS 780 Winter Contact
	Goodyear	Ultra Grip 5
	Michelin	Alpin
175/80 R 14 88T	Dunlop	SP Winter Sport M2
	Vredestein	Snowtrac
195/65 R 15 91T	Continental	TS 790 Winter Contact
	Dunlop	SP Winter Sport M3
	Goodyear	Ultra Grip 6
	Michelin	Alpin
	Pirelli	Winter 190
195/65 R 15 91H	Continental	TS 790 Winter Contact
	Michelin	Pilot Alpin
	Nokian	NRW
	Vredestein	Wintrac
	Goodyear	Eagle UG GW3
205/55 R 16 91H	Continental	TS 790 Winter Contact
	Dunlop	SP Winter Sport M3



Tyre size	Make	Tread pattern
	Michelin	Pilot Alpin
	Pirelli	Winter 210
	Vredestein	Wintrac

54.19 Winter tyres for Golf model year 2004 to model year 2009

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern	Remarks
195/65 R 15 91Q	Michelin	X-Ice	<ul style="list-style-type: none"> ◆ For Japan only ◆ For 1.6 E and 2.0l FSI engines only
195/65 R 15 91T	Bridgestone	LM25	
	Dunlop	Winter Sport 3D	
195/65 R 15 91H	Continental	TS 810	
	Dunlop	Winter Sport 3D	
	Goodyear	Eagle UG GW 3	
	Bridgestone	LM25	
	Pirelli	Winter 210	
	Nokian	WR	
195/65 R 15 95T	Goodyear	UG 6	
	Continental	TS 790	
205/55 R 16 91Q	Michelin	X-Ice	<ul style="list-style-type: none"> ◆ For Japan only ◆ For 1.6 E, 2.0l and 2.0l turbo engines only
205/55 R 16 91H	Goodyear	Eagle UG GW3	
	Michelin	Pilot Alpin	
	Nokian	WR	
	Pirelli	Winter 210	
	Bridgestone	LM25	
205/55 R 16 94H	Dunlop	SP Winter Sport M3 DSST	Tyres with run-flat properties ⇒ page 54
	Bridgestone	LM25	
205/55 R 17 93H	Dunlop	Winter Sport 3D	
225/45 R 17 91Q	Michelin	X-Ice	<ul style="list-style-type: none"> ◆ For Japan only ◆ For 2.0l turbo engines only

54.20 Winter tyres for Golf BlueMotion model year 2004 to model year 2009

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern	Remarks
195/65 R 15 91T	Bridgestone	LM25	
	Dunlop	Winter Sport 3D	
195/65 R 15 91H	Continental	TS 810	



Tyre size	Make	Tread pattern	Remarks
	Dunlop	Winter Sport 3D	
	Goodyear	Eagle UG GW 3	
	Bridgestone	LM25	
	Pirelli	Winter 210	
	Nokian	WR	
195/65 R 15 95T	Goodyear	UG 6	
	Continental	TS 790	

54.21 Winter tyres for Golf GTI model year 2005 to model year 2009

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern	Remarks
205/55 R 16 91H	Goodyear	Eagle UG GW3	
	Michelin	Pilot Alpin	
	Nokian	WR	
	Pirelli	Winter 210	
	Bridgestone	LM25	
205/55 R 16 94H	Dunlop	SP Winter Sport M3 DSST	Tyres with run-flat properties ⇒ page 54
	Bridgestone	LM25	
205/55 R 17 93H	Dunlop	Winter Sport 3D	

54.22 Winter tyres for Pirelli Golf model year 2008 to model year 2009

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern	Remarks
205/55 R 16 91H	Goodyear	Eagle UG GW3	
	Michelin	Pilot Alpin	
	Nokian	WR	
	Pirelli	Winter 210	
	Bridgestone	LM25	
205/55 R 16 94H	Dunlop	SP Winter Sport M3 DSST	Tyres with run-flat properties ⇒ page 54
	Bridgestone	LM25	
205/55 R 17 93H	Dunlop	Winter Sport 3D	

54.23 Winter tyres for Golf R32 model year 2006 to model year 2009

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
205/50 R 17 93H	Dunlop	Winter Sport 3D



54.24 Winter tyres for CrossGolf from model year 2007

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern	Remarks
195/65 R 15 91Q	Michelin	X-Ice	• Only for Japan: 1.6l FSI and 2.0l FSI engines
195/65 R 15 91T	Bridgestone	LM25	
	Dunlop	Winter Sport 3D	
195/65 R 15 91H	Continental	TS 810	
	Dunlop	Winter Sport 3D	
	Goodyear	Eagle UG GW 3	
	Bridgestone	LM25	
	Pirelli	Winter 210	
	Nokian	WR	
195/65 R 15 95T	Goodyear	UG 6	
	Continental	TS 790	
205/55 R 16 91H	Goodyear	Eagle UG GW3	
	Michelin	Pilot Alpin	
	Nokian	WR	
	Pirelli	Winter 210	
	Bridgestone	LM25	
205/55 R 16 94H	Dunlop	SP Winter Sport M3 DSST	Tyres with run-flat properties ⇒ page 54
	Bridgestone	LM25	

54.25 Winter tyres for Golf Plus from model year 2005

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern	Remarks
195/65 R 15 91Q	Michelin	X-Ice	• Only for Japan: 1.6l FSI and 2.0l FSI engines
195/65 R 15 91T	Bridgestone	LM25	
	Dunlop	Winter Sport 3D	
195/65 R 15 91H	Continental	TS 810	
	Dunlop	Winter Sport 3D	
	Goodyear	Eagle UG GW 3	
	Bridgestone	LM25	
	Pirelli	Winter 210	
	Nokian	WR	
195/65 R 15 95T	Goodyear	UG 6	
	Continental	TS 790	
205/55 R 16 91H	Goodyear	Eagle UG GW3	
	Michelin	Pilot Alpin	
	Nokian	WR	
	Pirelli	Winter 210	
	Bridgestone	LM25	



Tyre size	Make	Tread pattern	Remarks
205/55 R 16 94H	Dunlop	SP Winter Sport M3 DSST	Tyres with run-flat properties ⇒ page 54
	Bridgestone	LM25	

54.26 Winter tyres for Golf Plus BlueMotion from model year 2008

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern	Remarks
195/65 R 15 91T	Bridgestone	LM25	
	Dunlop	Winter Sport 3D	
195/65 R 15 91H	Continental	TS 810	
	Dunlop	Winter Sport 3D	
	Goodyear	Eagle UG GW 3	
	Bridgestone	LM25	
	Pirelli	Winter 210	
	Nokian	WR	
195/65 R 15 95T	Goodyear	UG 6	
	Continental	TS 790	

54.27 Winter tyres Bora, Bora 4Motion model year 1999 to model year 2005

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
195/65 R 15 91T	Continental	TS 790 Winter Contact
	Dunlop	SP Winter Sport M3
	Goodyear	Ultra Grip 6
	Michelin	Alpin
	Pirelli	Winter 190
195/65 R 15 91H	Continental	TS 790 Winter Contact
	Michelin	Pilot Alpin
	Nokian	NRW
	Vredestein	Wintrac
	Goodyear	Eagle UG GW3
205/55 R 16 91H	Continental	TS 790 Winter Contact
	Dunlop	SP Winter Sport M3
	Michelin	Pilot Alpin
	Pirelli	Winter 210
	Vredestein	Wintrac



54.28 Winter tyres Golf estate, Golf estate 4Motion model year 1999 to model year 2006, Bora estate, Bora estate 4Motion model year 1999 to model year 2005

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
195/65 R 15 91T	Continental	TS 790 Winter Contact
	Dunlop	SP Winter Sport M3
	Goodyear	Ultra Grip 6
	Michelin	Alpin
	Pirelli	Winter 190
195/65 R 15 91H	Continental	TS 790 Winter Contact
	Michelin	Pilot Alpin
	Nokian	NRW
	Vredestein	Wintrac
	Goodyear	Eagle UG GW3
205/55 R 16 91H	Continental	TS 790 Winter Contact
	Dunlop	SP Winter Sport M3
	Michelin	Pilot Alpin
	Pirelli	Winter 210
	Vredestein	Wintrac

54.29 Winter tyres for Golf 32

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
205/50 17 93T/H	Dunlop	SP Winter Sport M2

54.30 Winter tyres for Golf Anniversary GTI

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
205/55 R 16 91H	Continental	TS 790 Winter Contact
	Dunlop	SP Winter Sport M3
	Michelin	Pilot Alpin
	Pirelli	Winter 210
	Vredestein	Wintrac



54.31 Winter tyres Golf Variant model year 2007 to model year 2010

Observe the notes regarding the recommended makes of winter tyres => [page 488](#)

Tyre size	Make	Tread pattern	Remarks
195/65 R 15 91Q	Michelin	X-Ice	• Only for Japan: 1.6l FSI and 2.0l FSI engines
195/65 R 15 91T	Bridgestone	LM25	
	Dunlop	Winter Sport 3D	
195/65 R 15 91H	Continental	TS 810	
	Dunlop	Winter Sport 3D	
	Goodyear	Eagle UG GW 3	
	Bridgestone	LM25	
	Pirelli	Winter 210	
	Nokian	WR	
195/65 R 15 95T	Goodyear	UG 6	
	Continental	TS 790	
205/55 R 16 91H	Goodyear	Eagle UG GW3	
	Michelin	Pilot Alpin	
	Nokian	WR	
	Pirelli	Winter 210	
	Bridgestone	LM25	
205/55 R 16 94H	Dunlop	SP Winter Sport M3 DSST	Tyres with run-flat properties => page 54
	Bridgestone	LM25	
205/50 R 17 93H	Dunlop	Winter Sport 3D	

54.32 Winter tyres for Golf Variant BlueMotion model year 2008 to model year 2010

Observe the notes regarding the recommended makes of winter tyres => [page 488](#)

Tyre size	Make	Tread pattern	Remarks
195/65 R 15 91T	Bridgestone	LM25	
	Dunlop	Winter Sport 3D	
195/65 R 15 91H	Continental	TS 810	
	Dunlop	Winter Sport 3D	
	Goodyear	Eagle UG GW 3	
	Bridgestone	LM25	
	Pirelli	Winter 210	
	Nokian	WR	
195/65 R 15 95T	Goodyear	UG 6	
	Continental	TS 790	



54.33 Winter tyres Golf cabriolet model year 1998 to model year 2002

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
175/70 R13 82T	Uniroyal	MS + 4
	Goodyear	Ultra Grip 5
	Michelin	XM + S 130
185/60 R 14 82Q	Michelin	XM + S 130
185/60 R 14 82T	Continental	TS 780 Winter Contact
	Goodyear	Ultra Grip 5
	Michelin	Alpin
	Vredestein	Snowtrac
185/60 R 14 82H	Continental	TS 770 Winter Contact
185/55 R 15 85T	Continental	TS 770 Winter Contact
	Michelin	XM + S 130
185/55 R 15 82H	Continental	TS 770 Winter Contact
185/60 R 14 86T	Continental	TS 770 Winter Contact
	Michelin	XM + S 130

54.34 Winter tyres for New Beetle RSi

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
205/55 R 16 91H	Dunlop	SP Winter Sport M3
	Michelin	Pilot Alpin
	Pirelli	Winter 210

54.35 Winter tyres Passat model year 1994 to model year 1997

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
185/65 R 14 86T	Continental	TS 760 Winter Contact
	Goodyear	Ultra Grip 4 +
	Michelin	XM + S 130
	Uniroyal	MS + 4
195/60 R 14 86T	Continental	TS 770 Winter Contact
	Goodyear	Ultra Grip 4 +
	Michelin	XM + S 130
205/50 R 15 86H	Michelin	TXM + S 330



54.36 Winter tyres Passat model year 1997 to model year 2005

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern	Remarks
195/65 R 15 91T	Continental	TS 790 Winter Contact	
	Dunlop	SP Winter Sport M3	
	Goodyear	Ultra Grip 6	
	Michelin	Alpin	
	Pirelli	Winter 190	
195/65 R 15 91H	Continental	TS 790 Winter Contact	
	Michelin	Pilot Alpin	
	Nokian	NRW	
	Vredestein	Wintrac	
	Dunlop	SP Winter Sport M3	
205/55 R 16 91Q	Michelin	X-Ice	For Japan only
205/55 R 16 91H	Continental	TS 790 Winter Contact	
	Dunlop	SP Winter Sport M3	
	Michelin	Pilot Alpin	
	Pirelli	Winter 210	
	Vredestein	Wintrac	
205/55 R 16 94H	Dunlop	SP Winter Sport M3	

54.37 Winter tyres for Passat W8

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
205/55 R 16 94H XL XL means „Extra Load“ Notes ⇒ page 16	Dunlop	SP Winter Sport M3
205/50 R 17 93H for Europe	Dunlop	SP Winter Sport M2
225/45 R 17 91H	Continental	TS 790 Winter Contact
	Dunlop	SP Winter Sport M3
	Michelin	Pilot Alpin
	Pirelli	Winter 210
225/45 R 17 91V	Continental	TS 790 Winter Contact
	Pirelli	Winter 240

54.38 Winter tyres for Passat Protect

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
205/55 R 16 94H XL	Dunlop	SP Winter Sport M3

XL means „Extra Load“ ⇒ [page 16](#)



54.39 Winter tyres for Sharan from model year 1996

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
195/65 R 15 95T	Continental	TS 770 Winter Contact
Only 16" tyres are permitted for vehicles from model year 2002		
195/60 R 16 C 99/97T	Dunlop	SP Winter Sport M2
	Dunlop	SP Winter Sport 3D
	Bridgestone	Blizzak LM18C
215/55 R 16 97H	Dunlop	SP Winter Sport M3

54.40 Winter tyres for Sharan BlueMotion from model year 2009

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern
195/60 R 16 C 99/97T	Dunlop	SP Winter Sport M2
	Dunlop	SP Winter Sport 3D
	Bridgestone	Blizzak LM18C

54.41 Winter tyres for Touareg model year 2003 to model year 2010

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern	Remarks
235/70 R 16 106T	Continental	4x4 Winter Contact	
235/65 R 17 108H XL	Dunlop	Winter SPT3 DMS	
	Pirelli	Scorpion Ice & Snow	
255/55 R 18,109V XL	Pirelli	Scorpion Ice & Snow	
	Dunlop	Grandtrek Winter M3	
	Michelin	Latitude Alpin	
255/50 R 19 109Q	Michelin	Latitude X-Ice	<ul style="list-style-type: none"> ◆ For Japan only ◆ For V6 and V8 engines only
255/50 R 19,107V XL	Pirelli	Scorpion Ice & Snow	
	Dunlop	Grandtrek Winter M3	

XL means „Extra Load“ ⇒ [page 16](#)

54.42 Winter tyres for Touareg R50 model year 2008 to model year 2010

Observe the notes regarding the recommended makes of winter tyres ⇒ [page 488](#)

Tyre size	Make	Tread pattern	Remarks
255/50 R 19,107V XL	Pirelli	Scorpion Ice & Snow	
	Dunlop	Grandtrek Winter M3	



XL means „Extra Load“ => [page 16](#)

