



Repair Manual Golf 2013 ➤ e-Golf 2014 ➤

Wheel and Tire Guide

Edition 06.2015





List of Workshop Manual Repair Groups

Repair Group

44 - Wheels, Tires, Wheel Alignment

Technical information should always be available to the foremen and mechanics, because their careful and constant adherence to the instructions is essential to ensure vehicle road-worthiness and safety. In addition, the normal basic safety precautions for working on motor vehicles must, as a matter of course, be observed.



Contents

44 - Wheels, Tires, Wheel Alignment	1
1 General Information when Using Wheel and Tire Guide	1
1.1 General Information	1
1.2 Explanations about Regions	2
1.3 Tire Package Definition	3
1.4 Procedure to Find the Correct Tire Package	3
2 Certificate of Registration Explanation	4
2.1 Certificate of Registration Section 1	4
2.2 Version Key (D2)	4
3 Wheel and Tire Combinations	8
3.1 Golf 2013, from MY 2013, Sales Type 5G1	8
3.2 Golf BlueMotion, from MY 2013, Sales Type 5G1	15
3.3 Golf GTD, from MY 2013, Sales Type 5G1	16
3.4 Golf GTI, from MY 2013, Sales Type 5G1	18
3.5 Golf R, from MY 2014, Sales Type 5G1	20
4 Overview of Technically Possible Wheel and Tire Combinations depending on Tire Package	22
4.1 Type Approval Number (K): e1*2007/46*0623*10	22
4.2 Type Approval Number (K): e1*2007/46*0623*11 through e1*2007/46*0623*14	23
4.3 Type Approval Number (K): e1*2007/46*0623*15	24
5 Wheel Allocation	30
5.1 6 J x 15	30
5.2 6 J x 16	31
5.3 6 1/2 J x 16	32
5.4 6 J x 17	33
5.5 7 J x 17	34
5.6 7 1/2 J x 17	35
5.7 7 1/2 J x 18 ET 49	36
5.8 7 1/2 J x 18 ET 51	37
5.9 7 1/2 J x 19	38
5.10 8 J x 19	39
6 Recommended Summer Tires	41
6.1 Recommended Winter Tires, Worldwide except USA and Canada, China	41
6.2 Recommended Summer Tires, Japan, South Korea, Indonesia and Singapore	41
7 Recommended All Season Tires	43
7.1 Recommended all-season tires, worldwide except USA and Canada, China	43
7.2 Recommended All Season Tires, North America	43
8 Recommended Winter Tires, Worldwide except North America and China	44
9 Recommended Spare Tires and Emergency Wheels	45
10 Revision History	46





44 – Wheels, Tires, Wheel Alignment

1 General Information when Using Wheel and Tire Guide

(Edition 06.2015)

⇒ [“1.1 General Information”, page 1](#)

⇒ [“1.2 Explanations about Regions”, page 2](#)

⇒ [“1.3 Tire Package Definition”, page 3](#)

⇒ [“1.4 Procedure to Find the Correct Tire Package”, page 3](#)

1.1 General Information

Volkswagen vehicles are engineered based on the latest developments in safety technology. To keep it that way, it is recommended to use only original Volkswagen replacement parts. These can be recognized by the VW Audi trademark and by the part number. These replacement parts are known to be reliable, safe and suitable.

Despite ongoing survey of the market, we cannot assess other products on these points, even where in individual cases they have been passed by official inspectors or have been granted official approval. Therefore, we cannot assume any liability if these products are installed.



Note

- ◆ *Products from original Volkswagen replacement parts and Volkswagen accessories may differ in regards to assembly requirements, tightening specifications, etc.*
- ◆ *Pay attention to the tightening specifications for the wheel bolts.*
- ◆ *Pay attention to the assembly and installation instructions.*

The wheel and tire combinations or retrofittings listed in the vehicle tables refer exclusively to Volkswagen original disc wheels. Approval of wheel/tire combinations or retrofittings with disc wheels from the accessories trade is not possible with the accompanying parts certificate.

Information about Recommended Tires

- ◆ Tires are one of the most important construction elements of a vehicle and significantly influence driving safety. Therefore, the numerous requirements detailed in the DIN standards and the W.d.K. (Trade association of the German rubber industry) and tire manufacturer guidelines must be fulfilled. In addition, extensive tests are performed by Volkswagen before the tires are approved for original equipment on our vehicles.
- ◆ The following lists all tire makes/treads with which VW vehicles are equipped at the factory at the time this guide was published.
- ◆ These tire makes/treads fulfill the specified requirements. We therefore recommend using the tire makes/treads recommended in this guide when equipping vehicles with new tires.
- ◆ Be sure to read the important notes regarding run-flat tires. Refer to ⇒ Wheel and Tire Guide; Rep. Gr. 44 ; Run-Flat Tires .



- ♦ The winter tire sizes listed in the tables are the most sensible in terms of dynamic and economical driving. In principle, all other wheel/tire combinations listed in the Certificate of Conformity or in the certificate of registration Part I can be installed as M & S tires.

1.2 Explanations about Regions

The following information lists the countries that are combined into a region.

Region	Countries in the region
AGCC (Arab Gulf Cooperation Council)	Bahrain Qatar Kuwait Oman Saudi Arabia United Arab Emirates
Europe	Belgium Germany France Spain Portugal Italy Austria Switzerland Netherlands Luxemburg Poland Czech Republic Romania Slovakia Hungary Slovenia Croatia Great Britain
North America	USA Canada
Scandinavia	Denmark Finland Sweden Norway
South America	Argentina Brazil Bolivia Chile Ecuador Columbia Paraguay Peru Uruguay Venezuela



1.3 Tire Package Definition

To increase energy efficiency, environmental protection, and driving safety special tire packages were developed for every vehicle model and assembled based on the engine.

To attain an efficient product for the final consumer, the tire packages were developed to reduce CO₂ emissions according to a European Union requirement and also to maintain country-specific tax provisions.

More information about CO₂ emissions and the roll resistance. Refer to ⇒ Wheel and Tire Guide; Rep. Gr. 44 ; EU Tire Label; EU Tire Label, Categories; EU Tire Label, Categories, Roll Resistance .

The selection criteria to determine the tire package can only be found via the displacement with the power rating, the key version (refer to ⇒ [“2.2 Version Key \(D2\)”, page 4](#)) and the type approval number. They are in the section 1 contents in the certificate of registration. Refer to ⇒ [“2.1 Certificate of Registration Section 1”, page 4](#) .

1.4 Procedure to Find the Correct Tire Package

- ◆ Breakdown of the version key in the certificate of registration section 1 under D2. Refer to ⇒ [“2.1 Certificate of Registration Section 1”, page 4](#) .
- ◆ Finding the type approval number in the certificate of registration section 1 under K. Refer to ⇒ [“2.1 Certificate of Registration Section 1”, page 4](#) .
- ◆ Selecting the displacement and the output. Refer to ⇒ [“2.1 Certificate of Registration Section 1”, page 4](#) .
- ◆ Selecting the tire package for example package 01. Refer to ⇒ [“2.2 Version Key \(D2\)”, page 4](#) .
- ◆ Selecting a possible wheel/tire combination. Refer to ⇒ [“4 Overview of Technically Possible Wheel and Tire Combinations depending on Tire Package”, page 22](#) .

Example:

1 - The displacement in cm³ is in the certificate of registration section 1 under P.1 and the output in kW can be found under P.2; this shows which engine with which output is installed in the vehicle. Refer to

⇒ [“2.1 Certificate of Registration Section 1”, page 4](#) .

2 - Both the fourth and fifth to last digits always represent the tire package in the version key FM6FM6AJ009N7MMOVL01VR2. Refer to ⇒ [“2.2 Version Key \(D2\)”, page 4](#) .

3 - The type approval number e1*2007/46*0623*15 is located in the certificate of registration section 1 under K. Refer to ⇒ [“2.1 Certificate of Registration Section 1”, page 4](#) .

4 - With these three selection criteria it is possible to determine the wheel/tire combination of the actual vehicle. Refer to ⇒ [“4 Overview of Technically Possible Wheel and Tire Combinations depending on Tire Package”, page 22](#) .



⇒ **“2.1 Certificate of Registration Section 1”, page 4**

⇒ “2.2 Version Key (D2)”, page 4

2.1 Certificate of Registration Section 1

K - Contains the type approval number

P.1 - Displacement in cm³

P.2 - Power Rating in KW

[illegible]

2.2 Version Key (D2)

⇒ "2.2.1 Version Key (D2) Type Approval Number (K): e1*2007/46*0623*10", page 4

⇒ “2.2.2 Version Key (D2) Type Approval Number (K):
e1*2007/46*0623*11 through e1*2007/46*0623*14”, page 5

⇒ "2.2.3 Version Key (D2) from Type Approval Number (K): from e1*2007/46*0623*15", page 6

2.2.1 Version Key (D2) Type Approval Number (K): e1*2007/46*0623*10

⇒ “2.1 Certificate of Registration Section 1”, page 4



XXX	XXXXXX XX	X	XXX	X	XX	XX	XX	XXX
Digit for gear type	Digit for transmission	Digit for Vehicle- version	Digit for exhaust	Digit for damping/ suspension	Digit for chassis	Digit for rear axle	Digit for the tire package	Digit for consumption measure- ments
FM5	FM5AH0 19 FM5A405 1	N: Normal version	7MJ: EU5	O: without DCC	N1: Normal	VL: Torsion beam axle	00: General	VR0: without Start/Stop function and recuperation
FM6	FM5AF0 17 FM6AJ00 9	S: Sport (GTI, GTD)	7MM: EU6	M: with DCC	R1: Golf R (without steering arm thrust ring)	ML: multi-link suspension	01: without 17"	
AM6	FM6FB0 01 FM62Q0 25	B: Blue-Motion	0GA: electric (e-Golf)		R2: Golf R (with steering arm thrust ring)		02: with 17"	
FD6	FM62Q0 37 FM62S02 2	G: Natural gas						VR2: with start/stop function and recuperation
FD7	FM62S03 0 AM6FB0 02	R: R model						
AD6	AM62Q0 31 AM62Q0 32	E: Electric (e-Golf)						
FA1	FA1CZ00 3 FD6D900 2 FD6D900 4 FD6D900 5 FD7CW0 01 FD7CW0 02 AD6D900 6							

2.2.2 Version Key (D2) Type Approval Number (K): e1*2007/46*0623*11 through e1*2007/46*0623*14

⇒ ["2.1 Certificate of Registration Section 1", page 4](#)



XXX	XXXXXX XX	X	XXX	X	XX	XX	XX	XXX
Digit for gear type	Digit for transmission	Digit for Vehicle- version	Digit for exhaust	Digit for damping/ suspension	Digit for chassis	Digit for rear axle	Digit for the tire package	Digit for con- sumption measure- ments
FM5	FM5AH0 19 FM5A405 1	N: Normal ver- sion	7MJ: EU5	O: with- out DCC	N1: Normal	VL: Tor- sion beam axle	00: General	VR0: without Start/ Stop function and recu- peration
FM6	FM5AF0 17 FM6AJ00 9	S: Sport (GTI, GTD)	7MM: EU6	M: with DCC	R1: Golf R (with- out steering arm thrust ring)	ML: multi- link sus- pension	01: with- out 17"	
AM6	FM6FB0 01 FM62Q0 25	B: Blue- Motion	0GA: electric (e-Golf)		R2: Golf R (with steering arm thrust ring)		02: with 17"	
FD6	FM62Q0 37 FM62S02 2	G: Natural gas					03: with 18"	VR2: with start/stop function and recu- peration
FD7	FM62S03 0 AM6FB0 02	R: R model						
AD6	AM62Q0 31 AM62Q0 32	E: Elec- tric (e- Golf)						
FA1	FA1CZ00 3 FD6D900 2 FD6D900 4 FD6D900 5 FD7CW0 01 FD7CW0 02 AD6D900 6	P: Plug in Hybrid (GTE)						

2.2.3 Version Key (D2) from Type Approval Number (K): from e1*2007/46*0623*15

⇒ "2.1 Certificate of Registration Section 1", page 4



XXX	XXXXXX XX	X	XXX	X	XX	XX	XX	XXX
Digit for gear type	Digit for transmission	Digit for Vehicle- version	Digit for exhaust	Digit for damping/ suspension	Digit for chassis	Digit for rear axle	Digit for the tire package	Digit for consumption measure- ments
FM5	FM5A405 1 FM5AF0 17	N: Normal version	7MM: EU6	O: without DCC	N1: Normal	VL: Torsion beam axle	01: Tire package 01	VR0: without Start/Stop function and recuperation
FM6	FM6AJ00 9 FM62Q0 25	S: Sport (GTI, GTD)	0GA: electric (e-Golf)	M: with DCC	R1: Golf R (without steering arm thrust ring)	ML: multi-link suspension	02: Tire package 02	
AM6	FM62S02 2 FM62S03 0	B: Blue-Motion			R2: Golf R (with steering arm thrust ring)		61: Tire package 61 * through *	
FD6	FM6AJ01 1 FM62Q0 37	G: Natural gas					78: Tire package 78	VR2: with start/stop function and recuperation
FD7	AM6FB0 02 AM62Q0 31	R: R model						
AD6	AM62Q0 32 AD6D901 6	E: Electric (e-Golf)						
FA1	FA1CZ00 3 FD6D900 2 FD6D901 1 FD6DD0 01 FD7CW0 01 FD7CW0 02 FD7CW0 06	P: Plug in Hybrid (GTE)						



3 Wheel and Tire Combinations

⇒ "3.1 Golf 2013, from MY 2013, Sales Type 5G1", page 8

⇒ "3.2 Golf BlueMotion, from MY 2013, Sales Type 5G1", page 15

⇒ "3.3 Golf GTD, from MY 2013, Sales Type 5G1", page 16

⇒ "3.4 Golf GTI, from MY 2013, Sales Type 5G1", page 18

⇒ "3.5 Golf R, from MY 2014, Sales Type 5G1", page 20

3.1 Golf 2013, from MY 2013, Sales Type 5G1



Note

- ◆ The specified wheel/tire combinations apply to the engines and allocated types of transmissions.
- ◆ Any deviations are identified in the table.
- ◆ Depending on vehicle equipment, the wheel/tire combination 185/70 R15 on 5.5 J x 15 ET 47 may also be listed in Section I of the vehicle registration or the Certificate of Conformity. This wheel/tire combination can also be used on the vehicle listed.

The Golf is Listed According to the Sales Type and Not to the Type Approval.

The Type Approval and the Associated Type Approval Number is Listed as Follows.

Type AU Type Approval

Supplement to parts certificate 8112404694

Type approval number: e1*2007/46*0623*01 through e1*2007/46*0623*14

Overview

Model/ Engine Perform- ance	Tires	Tire Size	Disc Wheel	Off- set (mm)	Snow Chains	Comments
1.2L 63 kW gasoline engine	Summer tires	195/65 R 15 91T/H/V 1). Refer to ⇒ page 8	6 J x 15. Re- fer to ⇒ "5.1 6 J x 15", page 30 .	43	Yes	1) 195/65 R 15 tires on 6 J x 15 ET 43 rims are only per- mitted for vehicles with- out DCC.
1.6L 66 kW TDI; diesel engine		205/55 R 16 91T/H/V/ W	6 J x 16. Re- fer to ⇒ "5.2 6 J x 16", page 31 .	48	Yes	General information about ◆ Winter tires ◆ Snow Chains Refer to ⇒ Wheel and Tire Guide Gen- eral Information; Rep. Gr. 44 .
		205/55 R 16 91T/H/V/ W	6 1/2 J x 16. Refer to ⇒ "5.3 6 1/2 J x 16", page 32 .	46	No	Volkswagen recom- mended tire brands: ◆ Refer to ⇒ "7 Recommen- ded All Season Tires", page 43



Model/ Engine Perform- ance	Tires	Tire Size	Disc Wheel	Off- set (mm)	Snow Chains	Comments
		205/50 R 17 93T/H/V/ W	6 J x 17. Re- fer to ⇒ <u>"5.4 6 J x 17"</u> , page 33 .	48	Yes	♦ Refer to ⇒ <u>"9 Recommen- ded Spare Tires and Emergency Wheels"</u> , page 45
		225/45 R 17 91T/H/V/ W	7 J x 17. Re- fer to ⇒ <u>"5.5 7 J x 17"</u> , page 34 .	49	No	
		225/40 R 18 92Y	7 ¹ / ₂ J x 18. Refer to ⇒ <u>"5.8 7¹/₂ J x 18 ET 51"</u> , page 37 .	51	No	
	Winter tires	195/65 R 15 91Q/T/H 1). Refer to ⇒ page 8	6 J x 15. Re- fer to ⇒ <u>"5.1 6 J x 15"</u> , page 30 .	43	Yes	
		205/55 R 16 91Q/T/H	6 J x 16. Re- fer to ⇒ <u>"5.2 6 J x 16"</u> , page 31 .	48	Yes	
		205/50 R 17 93Q/T/H	6 J x 17. Re- fer to ⇒ <u>"5.4 6 J x 17"</u> , page 33 .	48	Yes	
1.2L 77 kW 1.2L 81 kW Gasoline engine	Summer tires	195/65 R 15 91H/V/ W ¹⁾ . Refer to ⇒ page 9	6 J x 15. Re- fer to ⇒ <u>"5.1 6 J x 15"</u> , page 30 .	43	Yes	1) 195/65 R 15 tires on 6 J x 15 ET 43 rims are only permit- ted for vehicles with- out DCC.
		205/55 R 16 91H/V/W	6 J x 16. Re- fer to ⇒ <u>"5.2 6 J x 16"</u> , page 31 .	48	Yes	
		205/55 R 16 91H/V/W	6 ¹ / ₂ J x 16. Refer to ⇒ <u>"5.3 6¹/₂ J x 16"</u> , page 32 .	46	No	
		205/50 R 17 93H/V/W	6 J x 17. Re- fer to ⇒ <u>"5.4 6 J x 17"</u> , page 33 .	48	Yes	
		225/45 R 17 91H/V/W	7 J x 17. Re- fer to ⇒ <u>"5.5 7 J x 17"</u> , page 34 .	49	No	



Model/ Engine Perform- ance	Tires	Tire Size	Disc Wheel	Off- set (mm)	Snow Chains	Comments
		225/40 R 18 92Y	7 ¹ / ₂ J x 18. Refer to ⇒ <u>"5.8 7¹/₂ J x 18 ET 51", page 37</u> .	51	No	
	Winter tires	195/65 R 15 91Q/T/H 1). Refer to ⇒ <u>page 9</u>	6 J x 15. Re- fer to ⇒ <u>"5.1 6 J x 15", page 30</u> .	43	Yes	
		205/55 R 16 91Q/T/H	6 J x 16. Re- fer to ⇒ <u>"5.2 6 J x 16", page 31</u> .	48	Yes	
		205/50 R 17 93Q/T/H	6 J x 17. Re- fer to ⇒ <u>"5.4 6 J x 17", page 33</u> .	48	Yes	
1.6L 77 kW TDI; diesel engine FWD and AWD 1.6L 81 kW TDI; diesel engine	Summer tires	195/65 R 15 91H/ V/W 1). Refer to ⇒ <u>page 10</u>	6 J x 15. Re- fer to ⇒ <u>"5.1 6 J x 15", page 30</u> .	43	Yes	1) 195/65 R 15 tires on 6 J x 15 ET 43 rims are only per- mitted for vehicles with- out DCC.
		205/55 R 16 91H/V/W	6 J x 16. Re- fer to ⇒ <u>"5.2 6 J x 16", page 31</u> .	48	Yes	
		205/55 R 16 91H/V/W	6 ¹ / ₂ J x 16. Refer to ⇒ <u>"5.3 6¹/₂ J x 16", page 32</u> .	46	No	
		205/50 R 17 93H/V/W	6 J x 17. Re- fer to ⇒ <u>"5.4 6 J x 17", page 33</u> .	48	Yes	
		225/45 R 17 91H/V/W	7 J x 17. Re- fer to ⇒ <u>"5.5 7 J x 17", page 34</u> .	49	No	
		225/40 R 18 92H	7 ¹ / ₂ J x 18. Refer to ⇒ <u>"5.8 7¹/₂ J x 18 ET 51", page 37</u> .	51	No	
	Winter tires	195/65 R 15 91Q/T/H 1). Refer to ⇒ <u>page 10</u>	6 J x 15. Re- fer to ⇒ <u>"5.1 6 J x 15", page 30</u> .	43	Yes	



Model/ Engine Performance	Tires	Tire Size	Disc Wheel	Off- set (mm)	Snow Chains	Comments
		205/55 R 16 91Q/T/H	6 J x 16. Re- fer to ⇒ "5.2 6 J x 16" , page 31 .	48	Yes	
		205/50 R 17 93Q/T/H	6 J x 17. Re- fer to ⇒ "5.4 6 J x 17" , page 33 .	48	Yes	
1.4L 81 kW natural gas	Summer tires	195/65 R 15 91H ¹⁾ . Refer to ⇒ page 11	6 J x 15. Re- fer to ⇒ "5.1 6 J x 15" , page 30 .	43	Yes	¹⁾ 195/65 R 15 tires on 6 J x 15 ET 43 rims are only permit- ted for vehicles with- out DCC.
		205/55 R 16 91H	6 J x 16. Re- fer to ⇒ "5.2 6 J x 16" , page 31 .	48	Yes	
		205/55 R 16 91H	6 ¹ / ₂ J x 16. Refer to ⇒ "5.3 6 1/2 J x 16" , page 32 .	46	No	
		205/50 R 17 93H	6 J x 17. Re- fer to ⇒ "5.4 6 J x 17" , page 33 .	48	Yes	
	Winter tires	195/65 R 15 91Q/T/H ¹⁾ . Refer to ⇒ page 11	6 J x 15. Re- fer to ⇒ "5.1 6 J x 15" , page 30 .	43	Yes	
		205/55 R 16 91Q/T/H	6 J x 16. Re- fer to ⇒ "5.2 6 J x 16" , page 31 .	48	Yes	
		205/50 R 17 93Q/T/H	6 J x 17. Re- fer to ⇒ "5.4 6 J x 17" , page 33 .	48	Yes	
	Summer tires	195/65 R 15 91H/ V/W ¹⁾ . Refer to ⇒ page 11	6 J x 15. Re- fer to ⇒ "5.1 6 J x 15" , page 30 .	43	Yes	
		205/55 R 16 91H/V/W	6 J x 16. Re- fer to ⇒ "5.2 6 J x 16" , page 31 .	48	Yes	
		205/55 R 16 91H/V/W	6 ¹ / ₂ J x 16. Refer to ⇒ "5.3 6 1/2 J x 16" , page 32 .	46	No	



Model/ Engine Perform- ance	Tires	Tire Size	Disc Wheel	Off- set (mm)	Snow Chains	Comments		
		205/50 R 17 93H/V/W	6 J x 17. Re- fer to ⇒ <u>"5.4 6 J x 17", page 33</u> .	48	Yes			
		225/45 R 17 91H/V/W	7 J x 17. Re- fer to ⇒ <u>"5.5 7 J x 17", page 34</u> .	49	No			
		225/40 R 18 92Y	7 ¹ / ₂ J x 18. Refer to ⇒ <u>"5.8 7¹/₂ J x 18 ET 51", page 37</u> .	51	No			
		225/35 R 19 88Y	7 ¹ / ₂ J x 19 ⇒ <u>"5.9 7¹/₂ J x 19", page 38</u> .	51	No			
	Winter tires	195/65 R 15 91Q/T/H 1). Refer to ⇒ <u>page 11</u>	6 J x 15. Re- fer to ⇒ <u>"5.1 6 J x 15", page 30</u> .	43	Yes			
		205/55 R 16 91Q/T/H	6 J x 16. Re- fer to ⇒ <u>"5.2 6 J x 16", page 31</u> .	48	Yes			
		205/50 R 17 93Q/T/H	6 J x 17. Re- fer to ⇒ <u>"5.4 6 J x 17", page 33</u> .	48	Yes			
	1.4L 103 kW; 1.4L 110 kW; Gasoline engine	Summer tires	195/65 R 15 91V/W 1). Refer to ⇒ <u>page 13</u>	6 J x 15. Re- fer to ⇒ <u>"5.1 6 J x 15", page 30</u> .	43		Yes	The use of 195/65 R 15 91V tires on 6 J x 15 ET43 rims applies retroactively to vehicles with 1.4L 103 kW gasoline engines from type approval number e1*2007/46*0623*01 through e1*2007/46*0623*03. Use of the tires is approved by the type approval and certification number 8109730606-01. This permit must be kept in the vehicle by the driver if the 195/65 R 15 91 tire size is not specified in the vehicle documentation.
			205/55 R 16 91V/W	6 J x 16. Re- fer to ⇒ <u>"5.2 6 J x 16", page 31</u> .	48		Yes	
205/55 R 16 91V/W			6 ¹ / ₂ J x 16. Refer to ⇒ <u>"5.3 6¹/₂ J x 16", page 32</u> .	46	No			
205/50 R 17 93V/W			6 J x 17. Re- fer to ⇒ <u>"5.4 6 J x 17", page 33</u> .	48	Yes			
225/45 R 17 91V/W			7 J x 17. Re- fer to ⇒ <u>"5.5 7 J x 17", page 34</u> .	49	No			



Model/ Engine Perform- ance	Tires	Tire Size	Disc Wheel	Off- set (mm)	Snow Chains	Comments
		225/40 R 18 92Y	7 ¹ / ₂ J x 18. Refer to ⇒ <u>"5.8 7¹/₂ J x 18 ET 51", page 37</u> .	51	No	1) 195/65 R 15 tires on 6 J x 15 ET 43 rims are only permit- ted for vehicles with- out DCC.
		225/35 R19 88Y	7 ¹ / ₂ J x 19. Refer to ⇒ <u>"5.9 7¹/₂ J x 19", page 38</u> .	51	No	
	Winter tires	195/65 R 15 91Q/T/H 1). Refer to ⇒ <u>page 13</u>	6 J x 15. Re- fer to ⇒ <u>"5.1 6 J x 15", page 30</u> .	43	Yes	
		205/55 R 16 91Q/T/H	6 J x 16. Re- fer to ⇒ <u>"5.2 6 J x 16", page 31</u> .	48	Yes	
		205/50 R 17 93Q/T/H	6 J x 17. Re- fer to ⇒ <u>"5.4 6 J x 17", page 33</u> .	48	Yes	
2.0L 110 kW TDI diesel engine FWD	Summer tires	195/65 R 15 91V/W 1). Refer to ⇒ <u>page 13</u>	6 J x 15. Re- fer to ⇒ <u>"5.1 6 J x 15", page 30</u> .	43	Yes	1) 195/65 R 15 tires on 6 J x 15 ET 43 rims are only permit- ted for vehicles with- out DCC. The use of 195/65 R 15 91V tires on 6 J x 15 ET43 rims applies retroactively to vehi- cles with 2.0L 110 kW TDI diesel en- gines with FWD from type approval num- ber e1*2007/46*0623*0 1 through e1*2007/46*0623*0 3. Use of the tires is approved by the type approval and certifi- cation number 8109730606-01. This permit must be kept in the vehicle by the driver if the 195/65 R 15 91 tire size is not specified in the vehicle docu- mentation.
		205/55 R 16 91V/W	6 J x 16. Re- fer to ⇒ <u>"5.2 6 J x 16", page 31</u> .	48	Yes	
		205/55 R 16 91V/W	6 ¹ / ₂ J x 16. Refer to ⇒ <u>"5.3 6¹/₂ J x 16", page 32</u> .	46	No	
		205/50 R 17 93V/W	6 J x 17. Re- fer to ⇒ <u>"5.4 6 J x 17", page 33</u> .	48	Yes	
		225/45 R 17 91V/W	7 J x 17. Re- fer to ⇒ <u>"5.5 7 J x 17", page 34</u> .	49	No	
		225/40 R 18 92V/W/Y	7 ¹ / ₂ J x 18. Refer to ⇒ <u>"5.8 7¹/₂ J x 18 ET 51", page 37</u> .	51	No	



Model/ Engine Perform- ance	Tires	Tire Size	Disc Wheel	Off- set (mm)	Snow Chains	Comments
		225/35 R19 88Y	7 ¹ / ₂ J x 19. Refer to ⇒ <u>"5.9 71/2 J x 19", page 38</u>	51	No	
	Winter tires	195/65 R 15 91Q/T/H 1). Refer to ⇒ <u>page 13</u>	6 J x 15. Re- fer to ⇒ <u>"5.1 6 J x 15", page 30</u>	43	Yes	
		205/55 R 16 91Q/T/H	6 J x 16. Re- fer to ⇒ <u>"5.2 6 J x 16", page 31</u>	48	Yes	
		205/50 R 17 93Q/T/H	6 J x 17. Re- fer to ⇒ <u>"5.4 6 J x 17", page 33</u>	48	Yes	
2.0L 110 kW TDI Diesel engine AWD	Summer tires	195/65 R 15 91V/W 1). Refer to ⇒ <u>page 14</u>	6 J x 15. Re- fer to ⇒ <u>"5.1 6 J x 15", page 30</u>	43	Yes	1) 195/65 R 15 tires on 6 J x 15 ET 43 rims are only per- mitted for vehicles with- out DCC.
		205/55 R 16 91V/W	6 J x 16. Re- fer to ⇒ <u>"5.2 6 J x 16", page 31</u>	48	No	The use of 195/65 R 15 91V tires on 6 J x 15 ET43 rims applies retroactively to vehi- cles with 2.0L 110 kW TDI diesel en- gines with AWD from type approval num- ber e1*2007/46*0623*0 3 through
		205/55 R 16 91V/W	6 ¹ / ₂ J x 16. Refer to ⇒ <u>"5.3 61/2 J x 16", page 32</u>	46	No	e1*2007/46*0623*0 3. Use of the tires is approved by the type approval and certi- fication number 8109730606-01.
		205/50 R 17 93V/W	6 J x 17. Re- fer to ⇒ <u>"5.4 6 J x 17", page 33</u>	48	Yes	This permit must be kept in the vehicle by the driver if the 195/65 R 15 91 tire size is not specified in the vehicle docu- mentation.
		225/45 R 17 91V/W	7 J x 17. Re- fer to ⇒ <u>"5.5 7 J x 17", page 34</u>	49	No	
		225/40 R 18 92V/W/Y	7 ¹ / ₂ J x 18. Refer to ⇒ <u>"5.8 71/2 J x 18 ET 51", page 37</u>	51	No	
	Winter tires	195/65 R 15 91Q/T/H 1). Refer to ⇒ <u>page 14</u>	6 J x 15. Re- fer to ⇒ <u>"5.1 6 J x 15", page 30</u>	43	Yes	



Model/ Engine Performance	Tires	Tire Size	Disc Wheel	Offset (mm)	Snow Chains	Comments
		205/55 R 16 91Q/T/H	6 J x 16. Refer to ⇒ <u>"5.2 6 J x 16", page 31</u> .	48	Yes	
		205/50 R 17 93Q/T/H	6 J x 17. Refer to ⇒ <u>"5.4 6 J x 17", page 33</u> .	48	Yes	

The tire pressures are listed on the tire pressure label on the inside of the fuel filler door and on the B-pillar on the driver side.

3.2 Golf BlueMotion, from MY 2013, Sales Type 5G1



Note

- ◆ The specified wheel/tire combinations apply to the engines and allocated types of transmissions.
- ◆ Any deviations are identified in the table.
- ◆ Depending on vehicle equipment, the wheel/tire combination 185/70 R15 on 5.5 J x 15 ET 47 may also be listed in Section I of the vehicle registration or the Certificate of Conformity. This wheel/tire combination can also be used on the vehicle listed.

The Golf BlueMotion is Listed According to the Sales Type and Not to the Type Approval

The Type Approval and the Associated Type Approval Number is Listed as Follows

Type AU Type Approval

Supplement to parts certificate 8112404694

Type Approval Number: e1*2007/46*0623*07 through e1*2007/46*0623*14

Overview

Model/ Engine Performance	Tires	Tire Size	Disc Wheel	Offset (mm)	Snow Chains	Comments
1.6L 81 kW TDI diesel engine	Summer tires	195/65 R 15 91H ¹⁾ . Refer to ⇒ <u>page 16</u>	6 J x 15. Refer to ⇒ <u>"5.1 6 J x 15", page 30</u> .	43	Yes	General information about ◆ Winter tires ◆ Snow Chains Refer to ⇒ Wheel and Tire Guide General Information; Rep. Gr. 44 .
		205/55 R 16 91H	6 J x 16. Refer to ⇒ <u>"5.2 6 J x 16", page 31</u> .	48	Yes	Volkswagen recommended tire brands: ◆ Refer to ⇒ <u>"7 Recommended All Season Tires", page 43</u>



Model/ Engine Perform- ance	Tires	Tire Size	Disc Wheel	Off- set (mm)	Snow Chains	Comments
		205/55 R 16 91H	6 ¹ / ₂ J x 16. Refer to ⇒ "5.3 6¹/₂ J x 16" , page 32 .	46	No	♦ Refer to ⇒ "9 Recommen- ded Spare Tires and Emergency Wheels" , page 45
		205/50 R 17 93H	6 J x 17. Re- fer to ⇒ "5.4 6 J x 17" , page 33 .	48	Yes	
	Winter tires	195/65 R 15 91Q/T/H 1). Refer to ⇒ page 16	6 J x 15. Re- fer to ⇒ "5.1 6 J x 15" , page 30 .	43	Yes	1) 195/65 R 15 tires on 6 J x 15 ET 43 rims are only permit- ted for vehicles with- out DCC.
		205/55 R 16 91Q/T/H	6 J x 16. Re- fer to ⇒ "5.2 6 J x 16" , page 31 .	48	Yes	
		205/50 R 17 93Q/T/H	6 J x 17. Re- fer to ⇒ "5.4 6 J x 17" , page 33 .	48	Yes	

The tire pressures are listed on the tire pressure label on the in-
side of the fuel filler door and on the B-pillar on the driver side.

3.3 Golf GTD, from MY 2013, Sales Type 5G1



Note

- ♦ *The specified wheel/tire combinations apply to the engines and allocated types of transmissions.*
- ♦ *Any deviations are identified in the table.*

The Golf GTD is Listed According to the Sales Type and Not to the Type Approval.

The Type Approval and the Associated Type Approval Number is Listed As Follows.

Type AU Type Approval

Supplement to parts certificate 8112404694





Type Approval Number: e1*2007/46*0623*06 through
e1*2007/46*0623*14

Overview

Model/ Engine Perform- ance	Tires	Tire Size	Disc Wheel	Off- set (mm)	Snow Chains	Comments
2.0L 135 kW TDI diesel engine	Summer tires	205/55 R 16 91V/W	6 J x 16. Re- fer to ⇒ <u>"5.2 6 J x 16"</u> , <u>page 31</u> .	48	Yes	General information about ♦ Winter tires ♦ Snow Chains Refer to ⇒ Wheel and Tire Guide Gen- eral Information; Rep. Gr. 44 . Volkswagen recom- mended tire brands: ♦ Refer to ⇒ <u>"7 Recommen- ded All Season Tires"</u> , <u>page 43</u> ♦ Refer to ⇒ <u>"9 Recommen- ded Spare Tires and Emergency Wheels"</u> , <u>page 45</u>
		205/55 R 16 91V/W	6 ¹ / ₂ J x 16. Re- fer to ⇒ <u>"5.3 6¹/₂ J x 16"</u> , <u>page 32</u> .	46	No	
		205/50 R 17 93V/W	6 J x 17. Re- fer to ⇒ <u>"5.4 6 J x 17"</u> , <u>page 33</u> .	48	Yes	
		225/45 R 17 91V/W	7 J x 17. Re- fer to ⇒ <u>"5.5 7 J x 17"</u> , <u>page 34</u> .	49	No	
		225/45 R 17 91V/W	7 ¹ / ₂ J x 17. Re- fer to ⇒ <u>"5.6 7¹/₂ J x 17"</u> , <u>page 35</u> .	49	No	
		225/40 R 18 92V/W	7 ¹ / ₂ J x 18. Re- fer to ⇒ <u>"5.7 7¹/₂ J x 18 ET 49"</u> , <u>page 36</u> .	49	No	
		225/40 R 18 92V/W	7 ¹ / ₂ J x 18. Re- fer to ⇒ <u>"5.8 7¹/₂ J x 18 ET 51"</u> , <u>page 37</u> .	51	No	
		225/35 R19 88Y	7 ¹ / ₂ J x 19. Re- fer to ⇒ <u>"5.9 7¹/₂ J x 19"</u> , <u>page 38</u> .	51	No	
	Winter tires	205/55 R 16 91Q/T/H	6 J x 16. Re- fer to ⇒ <u>"5.2 6 J x 16"</u> , <u>page 31</u> .	48	Yes	



Model/ Engine Perform- ance	Tires	Tire Size	Disc Wheel	Off- set (mm)	Snow Chains	Comments
		205/50 R 17 93Q/T/H	6 J x 17. Re- fer to ⇒ <u>"5.4 6 J x 17"</u> , <u>page 33</u> .	48	Yes	

The tire pressures are listed on the tire pressure label on the in-
side of the fuel filler door and on the B-pillar on the driver side.

3.4 Golf GTI, from MY 2013, Sales Type 5G1



Note

- ◆ The specified wheel/tire combinations apply to the engines and allocated types of transmissions.
- ◆ Any deviations are identified in the table.

The Golf GTI is Listed According to the Sales Type and Not to the Type Approval.

The type Approval and the Associated Type Approval Number is Listed as Follows.

Type AU Type Approval

Supplement to parts certificate 8112404694

Type Approval Number: e1*2007/46*0623*06 through
e1*2007/46*0623*14

Overview

Model/ Engine Perform- ance	Tires	Tire Size	Disc Wheel	Off- set (mm)	Snow Chains	Comments
2.0L 162 kW gasoline engine	Summer tires	205/55 R 16 91W	6 J x 16. Re- fer to ⇒ <u>"5.2 6 J x 16"</u> , <u>page 31</u> .	48	Yes	General information about ◆ Winter tires ◆ Snow Chains Refer to ⇒ Wheel and Tire Guide General Information, Rep. Gr. 44
		205/55 R 16 91W	6 1/2 J x 16. Re- fer to ⇒ <u>"5.3 6 1/2 J x 16"</u> , <u>page 32</u> .	46	No	Volkswagen recom- mended tire brands: ◆ Refer to ⇒ <u>"7 Recommen- ded All Season Tires"</u> , <u>page 43</u>
		205/50 R 17 93W	6 J x 17. Re- fer to ⇒ <u>"5.4 6 J x 17"</u> , <u>page 33</u> .	48	Yes	◆ Refer to ⇒ <u>"9 Recommen- ded Spare Tires and Emergency Wheels"</u> , <u>page 45</u>
		225/45 R 17 91W	7 J x 17. Re- fer to ⇒ <u>"5.5 7 J x 17"</u> , <u>page 34</u> .	49	No	



Model/ Engine Performance	Tires	Tire Size	Disc Wheel	Off- set (mm)	Snow Chains	Comments
		225/45 R 17 91W	7 ¹ / ₂ J x 17. Refer to ⇒ "5.6 7 ¹ / ₂ J x 17", page 35 .	49	No	
		225/40 R 18 92Y	7 ¹ / ₂ J x 18. Refer to ⇒ "5.7 7 ¹ / ₂ J x 18 ET 49", page 36 .	49	No	
		225/40 R 18 92Y	7 ¹ / ₂ J x 18. Refer to ⇒ "5.8 7 ¹ / ₂ J x 18 ET 51", page 37 .	51	No	
		225/35 R19 88Y	7 ¹ / ₂ J x 19. Refer to ⇒ "5.9 7 ¹ / ₂ J x 19", page 38 .	51	No	
	Winter tires	205/55 R 16 91Q/T/H	6 J x 16. Re- fer to ⇒ "5.2 6 J x 16", page 31 .	48	Yes	
		205/55 R 16 91Q/T/H	6 ¹ / ₂ J x 16. Refer to ⇒ "5.3 6 ¹ / ₂ J x 16", page 32 .	46	No	
2.0L 169 kW gasoline engine	Summer tires	205/50 R 17 93W	6 J x 17. Re- fer to ⇒ "5.4 6 J x 17", page 33 .	48	Yes	
		225/45 R 17 91W	7 J x 17. Re- fer to ⇒ "5.5 7 J x 17", page 34 .	49	No	
		225/45 R 17 91W	7 ¹ / ₂ J x 17. Refer to ⇒ "5.6 7 ¹ / ₂ J x 17", page 35 .	49	No	
		225/40 R 18 92Y	7 ¹ / ₂ J x 18. Refer to ⇒ "5.7 7 ¹ / ₂ J x 18 ET 49", page 36 .	49	No	



Model/ Engine Perform- ance	Tires	Tire Size	Disc Wheel	Off- set (mm)	Snow Chains	Comments
		225/40 R 18 92Y	7 ¹ / ₂ J x 18. Refer to ⇒ <u>"5.8 7 1/2 J x 18 ET 51"</u> , <u>page 37</u> .	51	No	
		225/35 R19 88Y	7 ¹ / ₂ J x 19. Refer to ⇒ <u>"5.9 7 1/2 J x 19"</u> , <u>page 38</u> .	51	No	
	Winter tires	205/50 R 17 93Q/T/H	6 J x 17. Re- fer to ⇒ <u>"5.4 6 J x 17"</u> , <u>page 33</u> .	48	Yes	

The tire pressures are listed on the tire pressure label on the inside of the fuel filler door and on the B-pillar on the driver side.

3.5 Golf R, from MY 2014, Sales Type 5G1



Note

- ◆ The specified wheel/tire combinations apply to the engines and allocated types of transmissions.
- ◆ Any deviations are identified in the table.

The Golf R is Listed According to the Sales Type and not to the Type Approval.

The Type Approval and the Associated Type Approval Number is Listed as Follows.

Type AU Type Approval

Supplement to parts certificate 8112404694

Type Approval Number: e1*2007/46*0623*09 through
e1*2007/46*0623*14

Overview

Model/ Engine Perform- ance	Tires	Tire Size	Disc Wheel	Off- set (mm)	Snow Chains	Comments
2.0L 206 kW 2.0L 221 kW gasoline engine	Summer tires	205/50 R 17 93W	6 J x 17. Re- fer to ⇒ <u>"5.4 6 J x 17"</u> , <u>page 33</u> .	48	Yes	General information about ◆ Winter tires ◆ Snow Chains Refer to ⇒ Wheel and Tire Guide Gen- eral Information; Rep. Gr. 44 .
		225/45 R 17 91W	7 J x 17. Re- fer to ⇒ <u>"5.5 7 J x 17"</u> , <u>page 34</u> .	49	No	



Model/ Engine Perform- ance	Tires	Tire Size	Disc Wheel	Off- set (mm)	Snow Chains	Comments
		225/40 R 18 92Y	7 ¹ / ₂ J x 18. Refer to ⇒ "5.7 7 ¹ / ₂ J x 18 ET 49", page 36 .	49	No	ded All Season Tires", page 43 ◆ Refer to ⇒ 9. Recommen- ded Spare Tires and Emergency Wheels", page 45
		225/40 R 18 92Y	7 ¹ / ₂ J x 18. Refer to ⇒ "5.8 7 ¹ / ₂ J x 18 ET 51", page 37 .	51	No	
		235/35 R19 91Y *). Refer to ⇒ page 21	8 J x 19. Re- fer to ⇒ "5.10 8 J x 19", page 39	50	No	
	Winter tires	205/50 R 17 93H	6 J x 17. Re- fer to ⇒ "5.4 6 J x 17", page 33 .	48	Yes	*) 235/35 R 19 91Y tires on 8 J x 19 ET 50 rims is only per- mitted if the conditions de- scribed are met. Re- fer to ⇒ page 40 .

The tire pressures are listed on the tire pressure label on the in-
side of the fuel filler door and on the B-pillar on the driver side.



4 Overview of Technically Possible Wheel and Tire Combinations de- pending on Tire Package

⇒ "4.1 Type Approval Number (K): e1*2007/46*0623*10",
page 22

⇒ "4.2 Type Approval Number (K): e1*2007/46*0623*11 through
e1*2007/46*0623*14", page 23

⇒ "4.3 Type Approval Number (K): e1*2007/46*0623*15",
page 24

4.1 Type Approval Number (K): e1*2007/46*0623*10

⇒ "1.3 Tire Package Definition", page 3

Supplement to Parts Certificate 8112404694

Type AU Type Approval



Note

*The fourth and fifth to last digits of the version key reference the
tire package. Refer to ⇒ [page 5](#). The tire package specified via
the version key on the certificate of registration section 1 is man-
datory.*

Example

e-Golf - specified in the version key in the type approval number
section 1: Tire package 01 this means that only this wheel/tire
combination is permitted for this vehicle and corresponds to the
type approval number.

**Allocation of the Technically Possible Tire Packages for the Re-
spective Engine Version.**



Note

- ◆ *There is always only one tire package allocated to the vehicle
in the certificate of registration section 1.*
- ◆ *General information for winter tires and snow chains. Refer to
⇒ [Wheel and Tire Guide; Rep. Gr. 44](#).*
- ◆ *All tire sizes listed in the vehicle papers can also be driven as
winter tires! It is recommended to use winter tires with the tire
size by which snow chains can be used. These tires are
marked with an "x" in the column "snow chains" in the following
table.*

Tire Package 01			
Engine	Tire Size	Rim Size	Snow Chains
e-Golf	195/65 R15 91Q M+S	6 J x 15 ET 43	x
	205/55 R16 91Q	6 J x 16 ET 48	x
	205/55 R16 91Q	6.5 J x 16 ET 46	-



Tire Package 02			
Engine	Tire Size	Rim Size	Snow Chains
e-Golf	195/65 R15 91Q	6 J x 15 ET 43	x
	205/55 R16 91Q	6 J x 16 ET 48	x
	205/55 R16 91Q	6.5 J x 16 ET 46	-
	225/45 R17 91W	7 J x 17 ET 49	-

Volkswagen Recommended Tire Brands

- ◆ Refer to ➔ [“7 Recommended All Season Tires”, page 43](#)
- ◆ Refer to ➔ [“9 Recommended Spare Tires and Emergency Wheels”, page 45](#)

4.2 Type Approval Number (K): e1*2007/46*0623*11 through e1*2007/46*0623*14

➔ [“1.3 Tire Package Definition”, page 3](#)

Supplement to Parts Certificate 8112404694

Type AU Type Approval



Note

The fourth and fifth to last digits of the version key reference the tire package. Refer to ➔ [page 6](#). The tire package specified via the version key on the certificate of registration section 1 is mandatory.

Example

Engine 1.4L 110 kW - specified in the version key in the type approval number section 1: Tire package 03. This means that only this wheel/tire combination is permitted for this vehicle and corresponds to the type approval number.

Allocation of the Technically Possible Tire Packages for the Respective Engine Version.



Note

- ◆ There is always only one tire package allocated to the vehicle in the certificate of registration section 1.
- ◆ General information for winter tires and snow chains. Refer to ➔ [Wheel and Tire Guide; Rep. Gr. 44](#).
- ◆ All tire sizes listed in the vehicle papers can also be driven as winter tires! It is recommended to use winter tires with the tire size by which snow chains can be used. These tires are marked with an “x” in the column “snow chains” in the following table.

Tire Package 01			
Engine	Tire Size	Rim Size	Snow Chains
e-Golf	195/65 R15 91Q M+S	6 J x 15 ET 43	x
	205/55 R16 91Q	6 J x 16 ET 48	x



Tire Package 01			
Engine	Tire Size	Rim Size	Snow Chains
	205/55 R16 91Q	6.5 J x 16 ET 46	-

Tire Package 01			
Engine	Tire Size	Rim Size	Snow Chains
1.4L 110 kW GTE Gasoline engine	205/55 R16 91V	6 J x 16 ET 48	x
	205/55 R16 91V	6.5 J x 16 ET 46	-

Tire Package 02			
Engine	Tire Size	Rim Size	Snow Chains
e-Golf	195/65 R15 91Q	6 J x 15 ET 43	x
	205/55 R16 91Q	6 J x 16 ET 48	x
	205/55 R16 91Q	6.5 J x 16 ET 46	-
	225/45 R17 91W	7 J x 17 ET 49	-

Tire Package 02			
Engine	Tire Size	Rim Size	Snow Chains
1.4L 110 kW GTE Gasoline engine	205/55 R16 91V	6 J x 16 ET 48	x
	205/55 R16 91V	6.5 J x 16 ET 46	-
	225/45 R17 91W	7.5 J x 17 ET 49	-

Tire Package 03			
Engine	Tire Size	Rim Size	Snow Chains
1.4L 110 kW GTE Gasoline engine	205/55 R16 91V	6 J x 16 ET 48	x
	205/55 R16 91V	6.5 J x 16 ET 46	-
	225/45 R17 91W	7.5 J x 17 ET 49	-
	225/40 R18 92Y	7.5 J x 18 ET 49	-

Volkswagen Recommended Tire Brands:

- ◆ Refer to ⇒ [“7 Recommended All Season Tires”, page 43](#)
- ◆ Refer to
⇒ [“9 Recommended Spare Tires and Emergency Wheels”,
page 45](#)

4.3 Type Approval Number (K): e1*2007/46*0623*15

⇒ [“1.3 Tire Package Definition”, page 3](#)



Supplement to Parts Certificate 8112404694

Type AU Type Approval



Note

The fourth and fifth to last digits of the version key reference the tire package. Refer to ➔ [page 7](#). The tire package specified via the version key on the certificate of registration section 1 is mandatory.

Example

Engine 1.4L 110 kW - specified in the version key in the type approval number section 1: Tire package 05. This means that only this wheel/tire combination is permitted for the vehicle and corresponds to the type approval number.

Allocation of the Technically Possible Tire Packages for the Respective Engine Version.



Note

- ◆ There is always only one tire package allocated to the vehicle in the certificate of registration section 1.
- ◆ General information for winter tires and snow chains. Refer to ➔ *Wheel and Tire Guide; Rep. Gr. 44*.
- ◆ All tire sizes listed in the vehicle papers can also be driven as winter tires! It is recommended to use winter tires with the tire size by which snow chains can be used. These tires are marked with an "x" in the column "snow chains" in the following table.

Tire Package 01			
Engine	Tire Size	Rim Size	Snow Chains
e-Golf	195/65 R15 91Q M+S	6 J x 15 ET 43	x
	205/55 R16 91Q	6 J x 16 ET 48	x
	205/55 R16 91Q	6.5 J x 16 ET 46	-

Tire Package 02			
Engine	Tire Size	Rim Size	Snow Chains
e-Golf	195/65 R15 91Q	6 J x 15 ET 43	x
	205/55 R16 91Q	6 J x 16 ET 48	x
	205/55 R16 91Q	6.5 J x 16 ET 46	-
	225/45 R17 91W	7 J x 17 ET 49	-

Tire Package 61			
Engine	Tire Size	Rim Size	Snow Chains
1.2L 63 kW 1.2L 81 kW 1.4L 92 kW 1.4L 92 kW FlexFuel (E85) Gasoline engine 1.4L 81 kW	195/65 R15 91H	6 J x 15 ET 43	x
	205/55 R16 91V	6 J x 16 ET 48	x



Tire Package 61			
Engine	Tire Size	Rim Size	Snow Chains
EcoFuel (natural gas CNG) 1.6L 66 kW 1.6L 81 kW Diesel engine	205/55 R16 91V	6.5 J x 16 ET 46	-

Tire Package 62			
Engine	Tire Size	Rim Size	Snow Chains
1.2L 63 kW	205/55 R16 91V	6 J x 16 ET 48	x
1.2L 81 kW	205/55 R16 91V	6.5 J x 16 ET 46	-
1.4L 92 kW			
1.4L 92 kW FlexFuel (E85)			
Gasoline engine			
1.6L 66 kW			
1.6L 81 kW			
Diesel engine			

Tire Package 63			
Engine	Tire Size	Rim Size	Snow Chains
1.2L 63 kW	195/65 R15 91H	6 J x 15 ET 43	x
1.2L 81 kW	205/55 R16 91V	6 J x 16 ET 48	x
1.4L 92 kW	205/55 R16 91V	6.5 J x 16 ET 46	-
1.4L 92 kW FlexFuel (E85)	225/45 R17 91W	7 J x 17 ET 49	-
Gasoline engine	225/40 R18 92Y	7.5 J x 18 ET 51	-
1.6L 66 kW			
1.6L 81 kW			
Diesel engine			

Tire Package 64			
Engine	Tire Size	Rim Size	Snow Chains
1.2L 63 kW	205/55 R16 91V	6 J x 16 ET 48	x
1.2L 81 kW	205/55 R16 91V	6.5 J x 16 ET 46	-
1.4L 92 kW	225/45 R17 91W	7 J x 17 ET 49	-
1.4L 92 kW FlexFuel (E85)	225/40 R18 92Y	7.5 J x 18 ET 51	-
Gasoline engine			
1.6L 66 kW			
1.6L 81 kW			
2.0L 110 kW			
Diesel engine			

Tire Package 65			
Engine	Tire Size	Rim Size	Snow Chains
1.2L 63 kW	195/65 R15 91H	6 J x 15 ET 43	x
1.2L 81 kW	205/55 R16 91V	6 J x 16 ET 48	x
1.4L 92 kW	205/55 R16 94V	6 J x 16 ET 48	x
1.4L 92 kW FlexFuel (E85)			



Tire Package 65			
Engine	Tire Size	Rim Size	Snow Chains
Gasoline engine 1.6L 66 kW	205/55 R16 91V	6.5 J x 16 ET 46	-
1.6L 81 kW Diesel engine	205/50 R17 93V	6 J x 17 ET 48	x

Tire Package 66			
Engine	Tire Size	Rim Size	Snow Chains
1.2L 63 kW	205/55 R16 91V	6 J x 16 ET 48	x
1.2L 81 kW	205/55 R16 94V	6 J x 16 ET 48	x
1.4L 92 kW	205/55 R16 91V	6.5 J x 16 ET 46	-
1.4L 92 kW FlexFuel (E85)	205/50 R17 93V	6 J x 17 ET 48	x
1.4L 110 kW Gasoline engine			
1.6L 66 kW			
1.6L 81 kW			
2.0L 110 kW Diesel engine			

Tire Package 67			
Engine	Tire Size	Rim Size	Snow Chains
1.0L 85 kW	195/65 R15 91H	6 J x 15 ET 43	x
Gasoline engine	205/55 R16 91V	6 J x 16 ET 48	x
1.6L 81 kW Diesel engine	205/55 R16 91V	6.5 J x 16 ET 46	-

Tire Package 68			
Engine	Tire Size	Rim Size	Snow Chains
1.4L 110 kW gasoline engine	195/65 R15 91H M+S	6 J x 15 ET 43	x
2.0L 110 kW diesel engine	205/55 R16 91V	6 J x 16 ET 48	x
	205/55 R16 94V	6 J x 16 ET 48	x
	205/55 R16 91V	6.5 J x 16 ET 46	-
	205/50 R17 93V	6 J x 17 ET 48	x

Tire Package 69			
Engine	Tire Size	Rim Size	Snow Chains
1.4L 92 kW	195/65 R15 91H M+S	6 J x 15 ET 43	x
1.4L 92 kW FlexFuel (E85)	205/55 R16 91V	6 J x 16 ET 48	x
1.4L 110 kW	205/55 R16 91V	6.5 J x 16 ET 46	-
Gasoline engine	225/45 R17 91W	7 J x 17 ET 49	-
2.0L 110 kW	225/40 R18 92Y	7.5 J x 18 ET 51	-
Diesel engine	225/35 R19 88Y XL	7.5 J x 19 ET 51	-

Tire Package 70			
Engine	Tire Size	Rim Size	Snow Chains
1.4L 92 kW	205/55 R16 91V	6 J x 16 ET 48	x



Tire Package 70			
Engine	Tire Size	Rim Size	Snow Chains
1.4L 92 kW FlexFuel (E85) 1.4L 110 kW Gasoline engine 2.0L 110 kW Diesel engine	205/55 R16 91V	6.5 J x 16 ET 46	-
	225/45 R17 91W	7 J x 17 ET 49	-
	225/40 R18 92Y	7.5 J x 18 ET 51	-
	225/35 R19 88Y XL	7.5 J x 19 ET 51	-

Tire Package 71			
Engine	Tire Size	Rim Size	Snow Chains
2.0L 162 kW Gasoline engine 2.0L 135 kW Diesel engine	205/55 R16 91H M+S	6 J x 16 ET 48	x
	205/50 R17 93H M+S	6 J x 17 ET 48	x
	225/45 R17 91W	7.5 J x 17 ET 49	-
	225/40 R18 92Y	7.5 J x 18 ET 51	-
	225/35 R19 88Y XL	7.5 J x 19 ET 51	-

Tire Package 72			
Engine	Tire Size	Rim Size	Snow Chains
2.0L 169 kW Gasoline engine	205/50 R17 93H M+S	6 J x 17 ET 48	x
	225/45 R17 91W	7.5 J x 17 ET 49	-
	225/40 R18 92Y	7.5 J x 18 ET 51	-
	225/35 R19 88Y XL	7.5 J x 19 ET 51	-

Tire Package 73			
Engine	Tire Size	Rim Size	Snow Chains
2.0L 206 kW 2.0L 221 kW Gasoline engine	205/50 R17 93H M+S	6 J x 17 ET 48	x
	225/40 R18 92Y	7.5 J x 18 ET 51	-
	235/35 R19 91Y XL	8 J x 19 ET 50	-

Tire Package 74			
Engine	Tire Size	Rim Size	Snow Chains
1.4L 110 kW GTE Gasoline engine	205/55 R16 91H M+S	6 J x 16 ET 48	x
	205/55 R16 91V	6.5 J x 16 ET 46	-
	205/50 R17 93H M+S	6 J x 17 ET 48	x

Tire Package 75			
Engine	Tire Size	Rim Size	Snow Chains
1.4L 110 kW GTE Gasoline engine	205/55 R16 91H M+S	6 J x 16 ET 48	x
	205/55 R16 91V	6.5 J x 16 ET 46	-
	205/50 R17 93H M+S	6 J x 17 ET 48	x
	225/45 R17 91W	7.5 J x 17 ET 49	-



Tire Package 76			
Engine	Tire Size	Rim Size	Snow Chains
1.4L 110 kW GTE Gasoline engine	205/55 R16 91H M+S	6 J x 16 ET 48	x
	205/55 R16 91V	6.5 J x 16 ET 46	-
	205/50 R17 93H M+S	6 J x 17 ET 48	x
	225/45 R17 91W	7.5 J x 17 ET 49	-
	225/40 R18 92Y	7.5 J x 18 ET 49	-
	225/40 R18 92Y	7.5 J x 18 ET 51	-

Tire Package 77			
Engine	Tire Size	Rim Size	Snow Chains
2.0L 110 kW Diesel engine	195/65 R15 91H M+S	6 J x 15 ET 43	x
	205/55 R16 91V	6 J x 16 ET 48	x
	205/55 R16 91V	6.5 J x 16 ET 46	-
	225/45 R17 91W	7.5 J x 17 ET 49	-
	225/40 R18 92Y	7.5 J x 18 ET 49	-

Tire Package 78			
Engine	Tire Size	Rim Size	Snow Chains
2.0L 206 kW 2.0L 221 kW Gasoline engine	205/50 R17 93H M+S	6 J x 17 ET 48	x
	225/40 R18 92Y	7.5 J x 18 ET 49	-

Volkswagen Recommended Tire Brands:

- ◆ Refer to ➤ [“7 Recommended All Season Tires”, page 43](#)
- ◆ Refer to ➤ [“9 Recommended Spare Tires and Emergency Wheels”, page 45](#)



5 Wheel Allocation

⇒ ["5.1 6 J x 15", page 30](#)

⇒ ["5.2 6 J x 16", page 31](#)

⇒ ["5.3 6 1/2 J x 16", page 32](#)

⇒ ["5.4 6 J x 17", page 33](#)

⇒ ["5.5 7 J x 17", page 34](#)

⇒ ["5.6 7 1/2 J x 17", page 35](#)

⇒ ["5.7 7 1/2 J x 18 ET 49", page 36](#)

⇒ ["5.8 7 1/2 J x 18 ET 51", page 37](#)

⇒ ["5.9 7 1/2 J x 19", page 38](#)

⇒ ["5.10 8 J x 19", page 39](#)

5.1 6 J x 15




Note

Pay attention to wheels/tires assignments for respective engine versions which are listed in the overview table.

Explanatory notes of indications on disc wheels:	Refer to ⇒ Wheel and Tire Guide General Information; Rep. Gr. 44 .
Tightening specifications for wheel bolts:	Refer to ⇒ Suspension, Wheels, Steering; Rep. Gr. 44 ; Wheels and Tires; Wheel Bolt Tightening Specifications .
Pitch circle diameter:	112 mm
Number of wheel bolt holes:	5


5Q0 601 027, 5Q0 601 027 L, 5Q0 601 027 N - Steel Rims

Dimension:	6 J x 15
Offset (mm):	43
Wheel load in kg:	615

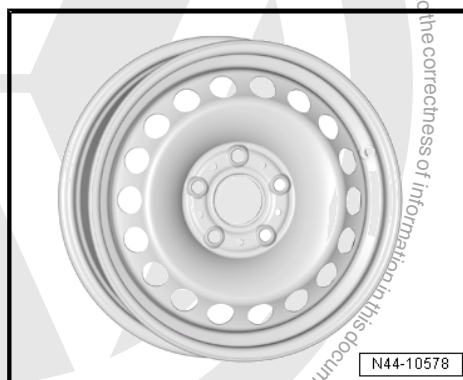

5G0 601 025 H, 5G0 601 025 AA - "LYON" Aluminum Rims

Dimension:	6 J x 15
Offset (mm):	43
Wheel load in kg:	575

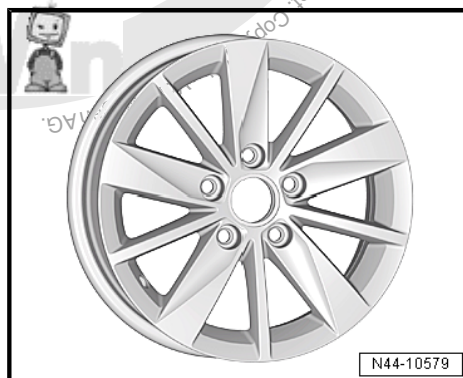



5.2 6 J x 16




Note

Pay attention to wheels/tires assignments for respective engine versions which are listed in the overview table.

Explanatory notes of indications on disc wheels:	Refer to ➤ Wheel and Tire Guide General Information; Rep. Gr. 44 .
Tightening specifications for wheel bolts:	Refer to ➤ Suspension, Wheels, Steering; Rep. Gr. 44 ; Wheels and Tires; Wheel Bolt Tightening Specifications .
Pitch circle diameter:	112 mm
Number of wheel bolt holes:	5


5Q0 601 027 E, 5Q0 601 027 H - Steel Rims

Dimension:	6 J x 16
Offset (mm):	48
Wheel load in kg:	615

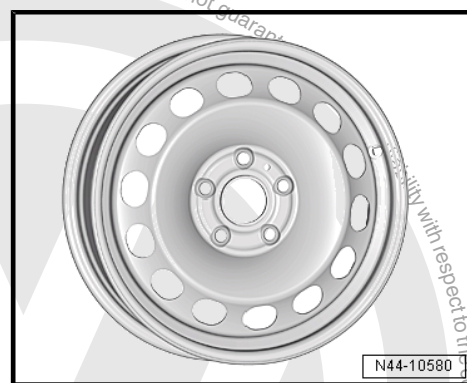

5Q0 601 027 Q, 5Q0 601 027 AF, 5Q0 601 027 AG - Steel Rims

Dimension:	6 J x 16
Offset (mm):	48
Wheel load in kg:	615

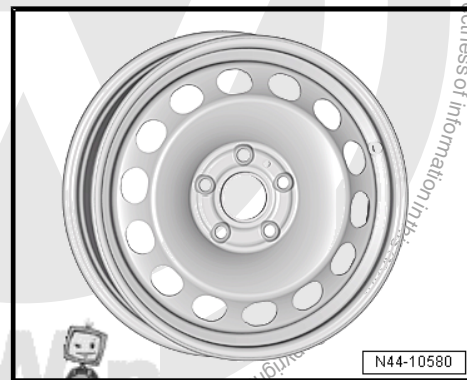

5G0 601 025 CE - "ASPEN" Aluminum Rim

Dimension:	6 J x 16
Offset (mm):	48
Wheel load in kg:	600





5.3 6¹/₂ J x 16




Note

Pay attention to wheels/tires assignments for respective engine versions which are listed in the overview table.

Explanatory notes of indications on disc wheels:	Refer to ⇒ Wheel and Tire Guide General Information; Rep. Gr. 44 .
Tightening specifications for wheel bolts:	Refer to ⇒ Suspension, Wheels, Steering; Rep. Gr. 44 ; Wheels and Tires; Wheel Bolt Tightening Specifications .
Pitch circle diameter:	112 mm
Number of wheel bolt holes:	5


5G0 601 025, 5G0 601 025 L, 5G0 601 025 M - "TORONTO" Aluminum Rim

Dimension:	6 ¹ / ₂ J x 16
Offset (mm):	46
Wheel load in kg:	575

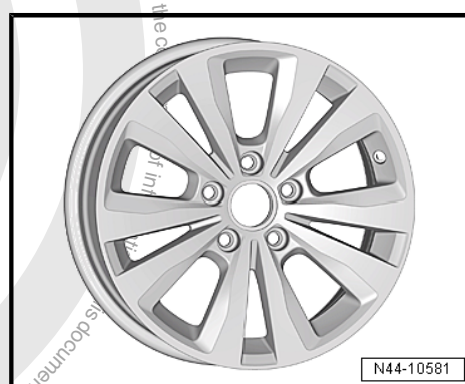


5G0 601 025 A, 5G0 601 025 N, 5G0 601 025 P, 5G0 601 025 Q - "DOVER" Aluminum Rims

Dimension:	6 ¹ / ₂ J x 16
Offset (mm):	46
Wheel load in kg:	600

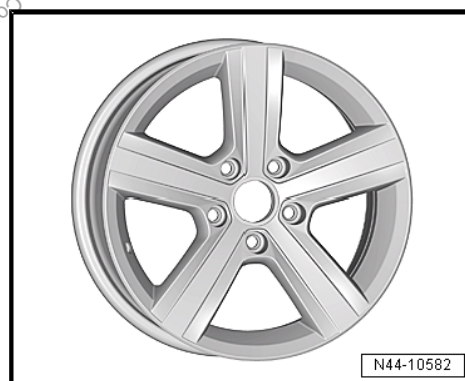

5G0 601 025 BN, 5G0 601 025 Q - "DOVER" Aluminum Rims


Dimension:	6 ¹ / ₂ J x 16
Offset in mm:	46
Wheel load in kg:	600

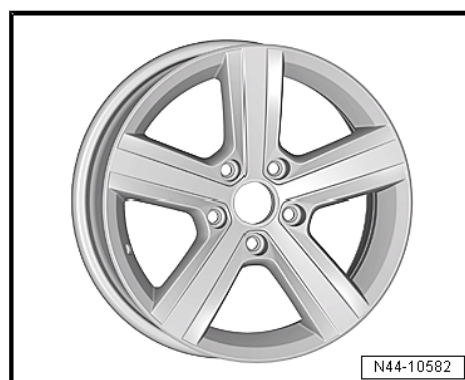




5G0 601 025 J, 5G0 601 025 AC - "PERTH" Aluminum Rims

Dimension:	6 1/2 J x 16
Offset in mm:	46
Wheel load in kg:	600

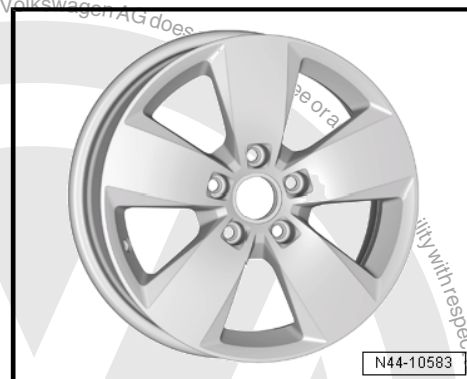


5GE 601 025 - "ASTANA" Aluminum Rims

Dimension:	6 1/2 J x 16
Offset (mm):	46
Wheel load in kg:	600

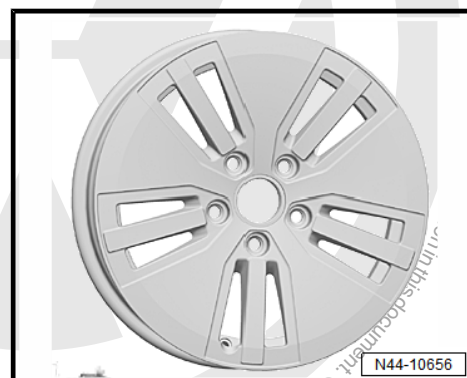

5G0 601 025 AT - "FORTALEZA" Aluminum Rims

Dimension:	6 1/2 J x 16
Offset in mm:	46
Wheel load in kg:	600

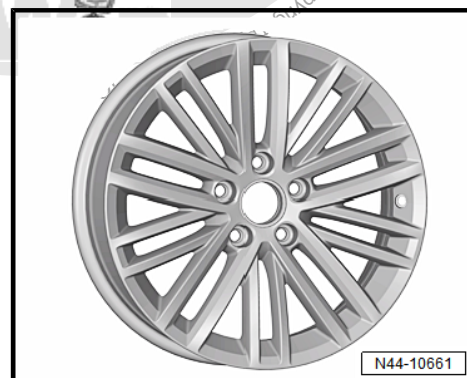

5.4 6 J x 17



Note

Pay attention to wheels/tires assignments for respective engine versions which are listed in the overview table.


Explanatory notes of indications on disc wheels:	Refer to ⇒ Wheel and Tire Guide General Information; Rep. Gr. 44 .
Tightening specifications for wheel bolts:	Refer to ⇒ Suspension, Wheels, Steering; Rep. Gr. 44 ; Wheels and Tires; Wheel Bolt Tightening Specifications .
Pitch circle diameter:	112 mm
Number of wheel bolt holes:	5



Winter Tire

5G0 601 025 K - "DIJON" Aluminum Rims

Dimension:	6 J x 17
Offset (mm):	48
Wheel load in kg:	600

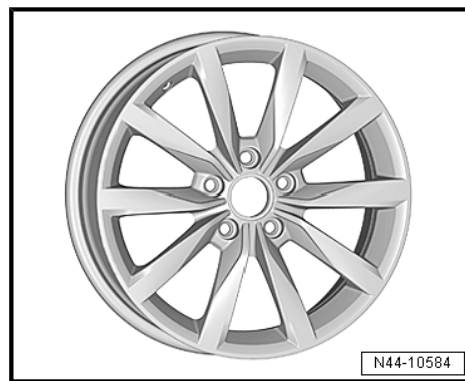

5.5 7 J x 17




Note

Pay attention to wheels/tires assignments for respective engine versions which are listed in the overview table.

Explanatory notes of indications on disc wheels:	Refer to ⇒ Wheel and Tire Guide General Information; Rep. Gr. 44 .
Tightening specifications for wheel bolts:	Refer to ⇒ Suspension, Wheels, Steering; Rep. Gr. 44 ; Wheels and Tires; Wheel Bolt Tightening Specifications .
Pitch circle diameter:	112 mm
Number of wheel bolt holes:	5


5G0 601 025 B, 5G0 601 025 R, 5G0 601 025 S - "DIJON" Aluminum Rims

Dimension:	7 J x 17
Offset (mm):	49
Wheel load in kg:	600

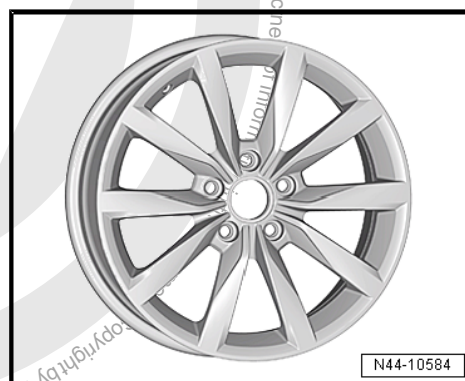

5G0 601 025 C, 5G0 601 025 T - "GENEVA" Aluminum Rims


Dimension:	7 J x 17
Offset (mm):	49
Wheel load in kg:	575

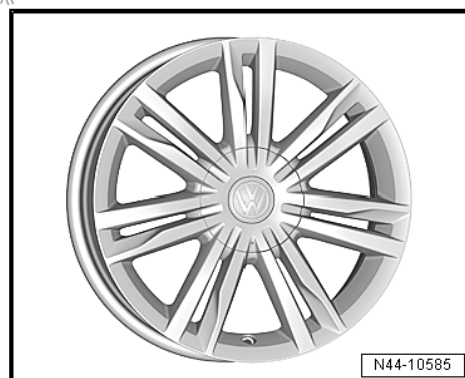



5G0 601 025 D - "MADRID" Aluminum Rims

Dimension:	7 J x 17
Offset (mm):	49
Wheel load in kg:	600

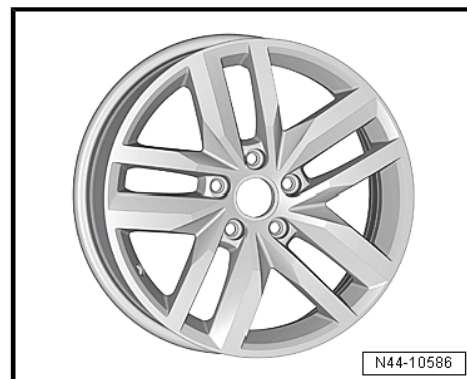

5G0 601 025 AK - "SINGAPORE" Aluminum Rims

Dimension:	7 J x 17
Offset (mm):	49
Wheel load in kg:	600



5G0 601 025 AE - "SALVADOR" Aluminum Rims

Dimension:	7 J x 17
Offset (mm):	49
Wheel load in kg:	600



5.6 7 1/2 J x 17



Note


Pay attention to wheels/tires assignments for respective engine versions which are listed in the overview table.

Explanatory notes of indications on disc wheels:	Refer to ⇒ Wheel and Tire Guide General Information; Rep. Gr. 44 .
Tightening specifications for wheel bolts:	Refer to ⇒ Suspension, Wheels, Steering; Rep. Gr. 44 ; Wheels and Tires; Wheel Bolt Tightening Specifications .
Pitch circle diameter:	112 mm
Number of wheel bolt holes:	5




5G0 601 025 AP - "CURITIBA" Aluminum Rims

Dimension:	7 ¹ / ₂ J x 17
Offset (mm):	49
Wheel load in kg:	575

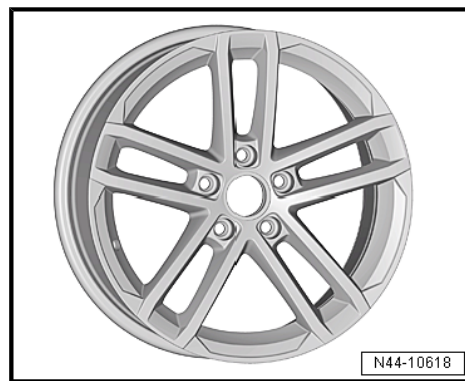

5G0 601 025 AR, 5G0 601 025 BG - "BROOKLYN" Aluminum Rims

Dimension:	7 ¹ / ₂ J x 17
Offset (mm):	49
Wheel load in kg:	600

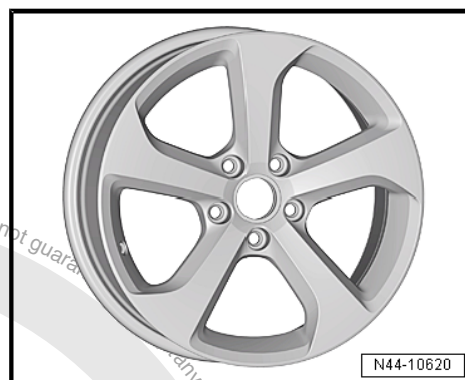

5.7 7¹/₂ J x 18 ET 49




Note

Pay attention to wheels/tires assignments for respective engine versions which are listed in the overview table.

Explanatory notes of indications on disc wheels:	Refer to ⇒ Wheel and Tire Guide General Information; Rep. Gr. 44 .
Tightening specifications for wheel bolts:	Refer to ⇒ Suspension, Wheels, Steering; Rep. Gr. 44 ; Wheels and Tires; Wheel Bolt Tightening Specifications .
Pitch circle diameter:	112 mm
Number of wheel bolt holes:	5

5G0 601 025 AQ - "NOGARO" Aluminum Rims


Dimension:	7 ¹ / ₂ J x 18
Offset (mm):	49
Wheel load in kg:	600

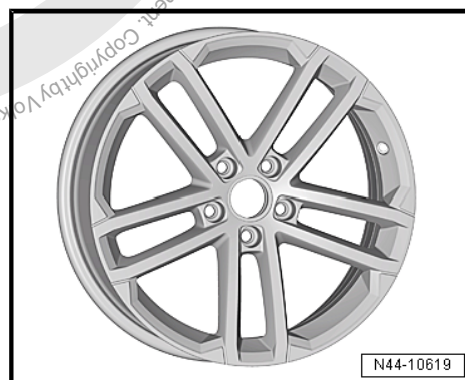




5G0 601 025 AS - "AUSTIN" Aluminum Rims

Dimension:	7 ¹ / ₂ J x 18
Offset (mm):	49
Wheel load in kg:	600

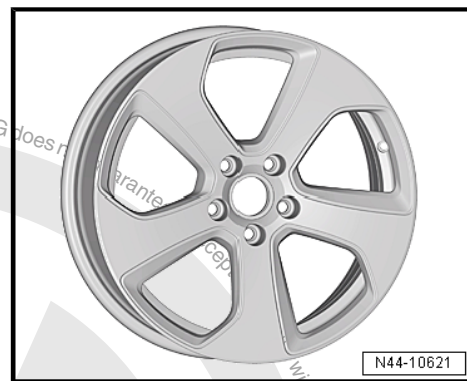

5G0 601 025 AG - "CADIZ" Aluminum Rims


Dimension:	7 ¹ / ₂ J x 18
Offset (mm):	49
Wheel load in kg:	600

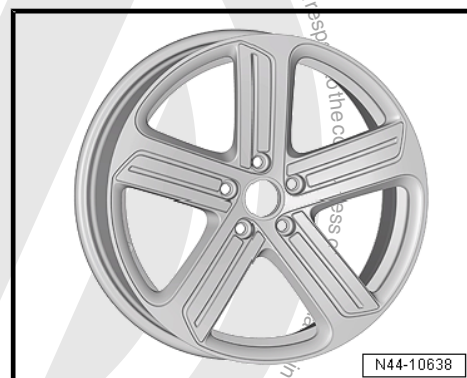

Winter Tire

5G0 601 025 BK - "CADIZ" Aluminum Rims

Dimension:	7 ¹ / ₂ J x 18
Offset (mm):	49
Wheel load in kg:	600

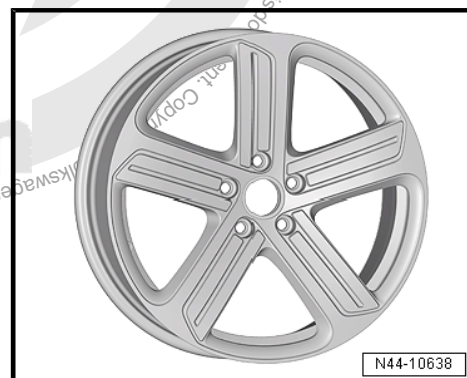

5.8 7¹/₂ J x 18 ET 51



Note


Pay attention to wheels/tires assignments for respective engine versions which are listed in the overview table.

Explanatory notes of indications on disc wheels:	Refer to ⇒ Wheel and Tire Guide General Information; Rep. Gr. 44 .
Tightening specifications for wheel bolts:	Refer to ⇒ Suspension, Wheels, Steering; Rep. Gr. 44 ; Wheels and Tires; Wheel Bolt Tightening Specifications .
Pitch circle diameter:	112 mm
Number of wheel bolt holes:	5




5G0 601 025 G - "DURBAN" Aluminum Rim

Dimension:	7 ¹ / ₂ J x 18
Offset (mm):	51
Wheel load in kg:	615

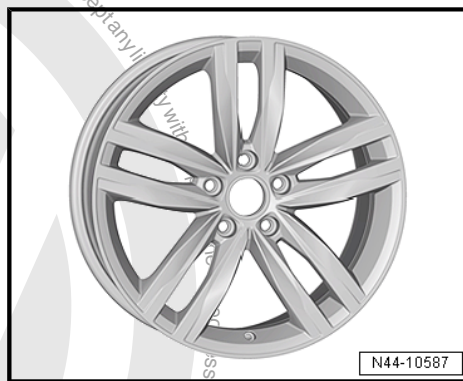


5G0 601 025 AL - "MARSEILLE" Aluminum Rims

Dimension:	7 ¹ / ₂ J x 18
Offset (mm):	51
Wheel load in kg:	600

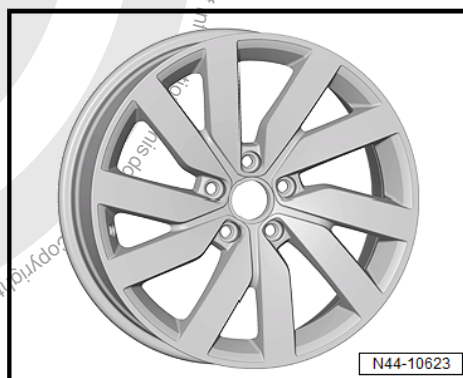

5G0 601 025 AF - "SALVADOR" Aluminum Rims

Dimension:	7 ¹ / ₂ J x 18
Offset (mm):	51
Wheel load in kg:	600

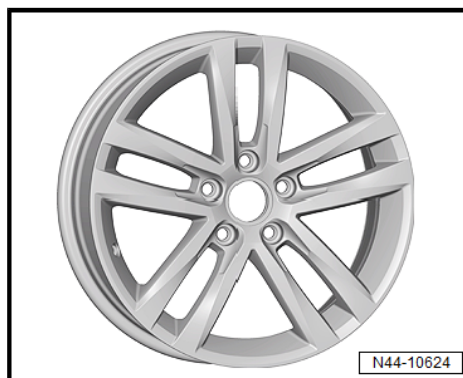

5K0 601 025 AC - Aluminum Rim "SERRON"

Dimension:	7 ¹ / ₂ J x 18
Offset (mm):	51
Wheel load in kg:	630



5.9 7¹/₂ J x 19



Note


Pay attention to wheels/tires assignments for respective engine versions which are listed in the overview table.



Explanatory notes of indications on disc wheels:	Refer to ⇒ Wheel and Tire Guide General Information; Rep. Gr. 44 .
Tightening specifications for wheel bolts:	Refer to ⇒ Suspension, Wheels, Steering; Rep. Gr. 44 ; Wheels and Tires; Wheel Bolt Tightening Specifications .
Pitch circle diameter:	112 mm
Number of wheel bolt holes:	5

5G0 601 025 AM - "LUXOR" Aluminum Rims

Dimension:	7 ¹ / ₂ J x 19
Offset (mm):	51
Wheel load in kg:	600

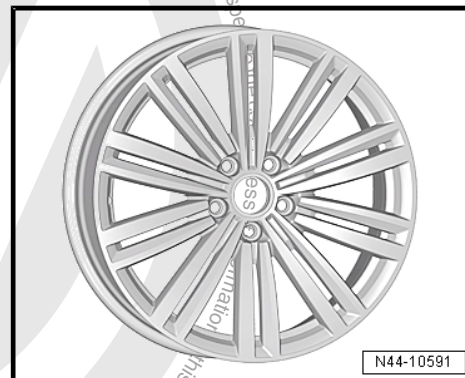

5G0 601 025 AN - "SANTIAGO" Aluminum Rims

Dimension:	7 ¹ / ₂ J x 19
Offset (mm):	51
Wheel load in kg:	600



5.10 8 J x 19



Note

Pay attention to wheels/tires assignments for respective engine versions which are listed in the overview table.

Explanatory notes of indications on disc wheels:	Refer to ⇒ Wheel and Tire Guide General Information; Rep. Gr. 44 .
Tightening specifications for wheel bolts:	Refer to ⇒ Suspension, Wheels, Steering; Rep. Gr. 44 ; Wheels and Tires; Wheel Bolt Tightening Specifications .
Pitch circle diameter:	112 mm
Number of wheel bolt holes:	5




Caution

8 J x 19 wheels may only be installed under the following conditions:

- *The wheel may only be mounted on R vehicles that are already factory-equipped with 19 inch wheels.*
- *It is not possible to retrofit vehicles that have factory-installed 18 inch wheels.*

5G0 601 025 AH - "CADIZ" Aluminum Rims

Dimension:	8 J x 19
Offset (mm):	50
Wheel load in kg:	600

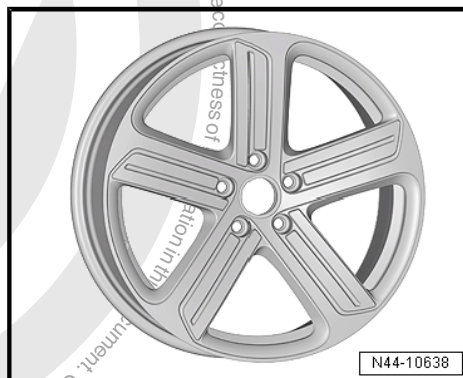

5G0 601 025 AJ - "PRETORIA" Aluminum Rims

Dimension:	8 J x 19
Offset (mm):	50
Wheel load in kg:	600





6 Recommended Summer Tires

⇒ [“6.1 Recommended Winter Tires, Worldwide except USA and Canada, China”, page 41](#)

⇒ [“6.2 Recommended Summer Tires, Japan, South Korea, Indonesia and Singapore”, page 41](#)

6.1 Recommended Winter Tires, Worldwide except USA and Canada, China

Information about the recommended tires. Refer to ⇒ [page 1](#).

⇒ [“1.2 Explanations about Regions”, page 2](#)

Tire size	Manufacturer	Tread designation	Comments
195/65 R 15 91H	Michelin	Energy Saver	Rolling Resistance Tires. Refer to ¹⁾
	Goodyear	Excellence	
	Hankook	Kinergy Eco	
	Michelin	Energy Saver	
	Goodyear	Excellence	
205/55 R 16 91Q	Continental	eContact	for eGolf only
205/55 R 16 91V	Michelin	Energy Saver	Rolling Resistance Tires. Refer to ¹⁾
	Bridgestone	Turanza ER 300 Ecopia	
	Dunlop	SP Fast Response	
	Michelin	Energy Saver	
	Continental	Eco Contact 5	
	Dunlop	SP Sport Fast Response	
225/45 R 17 91W	Dunlop	SP Sport 01A	
	Bridgestone	Turanza ER 300	
	Bridgestone	Turanza T001	
	Pirelli	Cinturato P7	
	Dunlop	SportMaxx GT	
	Michelin	Primacy HP	
225/40 R 18 92Y	Continental	Sport Contact 2	
	Bridgestone	Potenza S001	
	Dunlop	SportMaxx GT	
225/35 R 19 88Y	Dunlop	SportMaxx GT	
	Pirelli	P Zero	
235/35 R 19 92Y	Bridgestone	Potenza RE050A	

1) Refer to ⇒ Wheel and Tire Guide General Information; Rep. Gr. 44 ; General Information; Rolling Resistance Tires .

6.2 Recommended Summer Tires, Japan, South Korea, Indonesia and Singapore


Information about the recommended tires. Refer to ⇒ [page 1](#).

⇒ [“1.2 Explanations about Regions”, page 2](#)

Tire size	Manufacturer	Tread designation
195/65 R 15 91H	Michelin	Energy Saver
	Goodyear	Excellence
205/55 R 16 91V	Michelin	Energy Saver
	Bridgestone	Turanza ER 300 Ecopia



Tire size	Manufacturer	Tread designation
225/45 R 17 91W	Bridgestone	Turanza ER 300 Ecopia
	Michelin	Primacy HP
225/40 R 18 92Y	Continental	Sport Contact 2
	Bridgestone	Potenza S001
225/35 R 19 88Y	Pirelli	P Zero
235/35 R 19 92Y	Bridgestone	Potenza RE050A

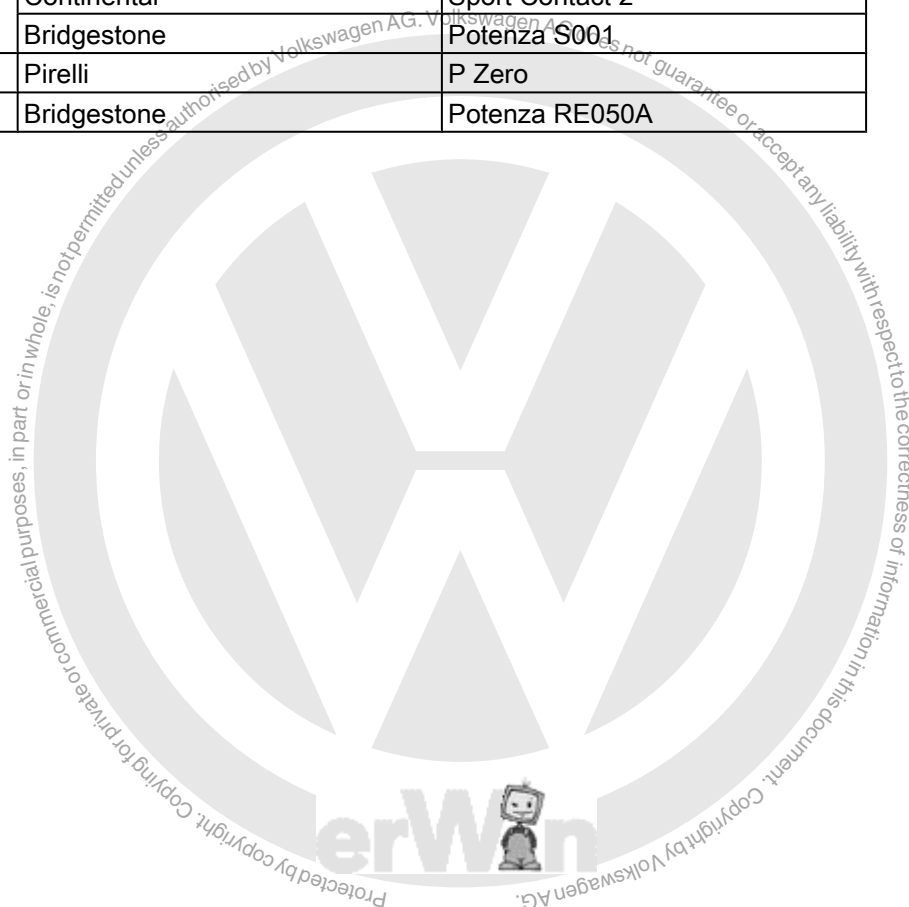



7 Recommended All Season Tires

⇒ ["7.2 Recommended All Season Tires, North America", page 43](#)

7.1 Recommended all-season tires, worldwide except USA and Canada, China

Information about the recommended tires. Refer to ⇒ [page 1](#) .

Refer to ⇒ ["1.2 Explanations about Regions", page 2](#)

Tire size	Manufacturer	Tread designation	Comments
195/65 R 15 91H	Goodyear	Vector4Season	
205/55 R 16 91H	Hankook	H730 Optimo 4S	
	Goodyear	Vector4Season	
205/50 R 17 93V	Continental	TS815CS	"ContiSeal"Run-Flat Tire ²⁾

2) Refer to ⇒ Suspension, Wheels, Steering; Rep. Gr. 44 ; Wheels and Tires .

7.2 Recommended All Season Tires, North America

Information about the Recommended Tires. Refer to ⇒ [page 1](#) .

Refer to ⇒ ["1.2 Explanations about Regions", page 2](#)

Tire Size	Manufacturer	Tread Designation
195/65 R 15 91H	Continental	Pro Contact
205/55 R 16 91H	Continental	Pro Contact
	Michelin	Primacy MXV 4
	Bridgestone	Turanza EL 400-2
	Goodyear	Eagle LS2
	Hankook	H725A Optimo
225/45 R 17 91H	Continental	Pro Contact
	Michelin	MXM 4
	Goodyear	Eagle LS2
225/40 R 18 92H	Pirelli	P Zero Nero
	Goodyear	Eagle LS2



8 Recommended Winter Tires, Worldwide except North America and China

Information about the recommended tires. Refer to ➔ , [page 1](#) .

Refer to ➔ ["1.2 Explanations about Regions", page 2](#)


Tire size	Manufacturer	Tread designation
195/65 R 15 91H	Bridgestone	Blizzard LM32
	Dunlop	SP Winter Sport 3D
205/55 R 16 91H	Bridgestone	Blizzard LM32
	Goodyear	Ultra Grip Performance
	Pirelli	W210
205/50 R 17 93H	Dunlop	SP Winter Sport 4D
	Dunlop	SP Winter Sport 3D
225/40 R 18 92V	Dunlop	SP Winter Sport 3D



9 Recommended Spare Tires and Emergency Wheels

If Necessary, Explain to the Customer the Information About Tires and Refer the Customer to the Owner's Manual.

The notes listed in the following also apply to spare wheels, e.g. 6.5 J x 16 with 205/55 R 16 tires, which are marked with the lettering "MAX 80 km/h" or "MAX 50 mph" on a yellow sticker.

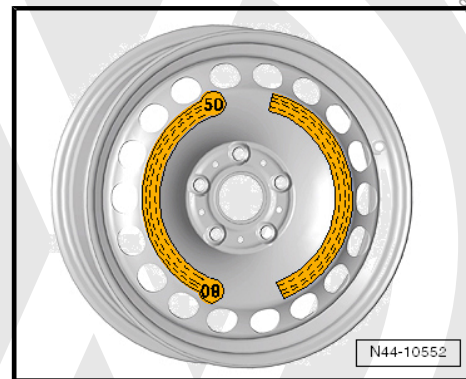

Note

- ◆ The vehicle may have a spare wheel with the above mentioned sticker in place of an emergency wheel, depending on the vehicle equipment.
- ◆ Emergency wheel/spare wheel is designed only for sporadic and brief use. Therefore it is to be replaced with the normal wheel again as soon as possible.
- ◆ After mounting the emergency wheel/spare wheel, tire inflation pressure must be checked as soon as possible.
- ◆ The tire pressures are listed on the tire pressure label on the inside of the fuel filler door and on the B-pillar on the driver side.
- ◆ Always observe the speed rating on the spare tire on the emergency wheel ("MAX 80 km/h" or "MAX 50 mph").
- ◆ Wide Open Throttle (WOT) acceleration, strong braking and rapid driving around curves should be prevented.
- ◆ Never drive with more than one emergency wheel/spare wheel.
- ◆ It is not permissible to use snow chains on the emergency wheel for technical reasons.
- ◆ If vehicle must be driven with snow chains, therefore the emergency wheel must be installed on the rear axle for a breakdown on the front axle. The rear wheel freed up must then be mounted in place of the faulty front wheel.

Refer to the Parts Catalog for replacement part number.

Disc Wheel	Tires		
Dimension	Dimension	Manufacturer	Tread
3 1/2 J x 18 ET 25.5	T125/70 R 18 99M	Continental	CST 17
3 1/2 J x 16 ET 25.5 ³⁾	T125/70 R 16 96M	Continental	CST 17

3) not for 4Motion



10 Revision History

DRUCK NUMBER: K0059211821

Fac- tory Edi- tion	Edit Edi- tion	Job Type	Feed back	Notes	Quality Checke d By
06.2 015	7/16/ 2015	Fac- tory Up- date	N/A		Jim H
04.2 015	05/1 5/20 15	Fac- tory Up- date	N/A		Joe Y
	11/1 9/20 14	Link Chec king	N/A		Eric P
	10/2 7/20 14	Fac- tory New	N/A		Eric P

Cautions & Warnings

Please read these WARNINGS and CAUTIONS before proceeding with maintenance and repair work. You must answer that you have read and you understand these WARNINGS and CAUTIONS before you will be allowed to view this information.

- If you lack the skills, tools and equipment, or a suitable workshop for any procedure described in this manual, we suggest you leave such repairs to an authorized Volkswagen retailer or other qualified shop. We especially urge you to consult an authorized Volkswagen retailer before beginning repairs on any vehicle that may still be covered wholly or in part by any of the extensive warranties issued by Volkswagen.
- Disconnect the battery negative terminal (ground strap) whenever you work on the fuel system or the electrical system. Do not smoke or work near heaters or other fire hazards. Keep an approved fire extinguisher handy.
- Volkswagen is constantly improving its vehicles and sometimes these changes, both in parts and specifications, are made applicable to earlier models. Therefore, part numbers listed in this manual are for reference only. Always check with your authorized Volkswagen retailer parts department for the latest information.
- Any time the battery has been disconnected on an automatic transmission vehicle, it will be necessary to reestablish Transmission Control Module (TCM) basic settings using the VAG 1551 Scan Tool (ST).
- Never work under a lifted vehicle unless it is solidly supported on stands designed for the purpose. Do not support a vehicle on cinder blocks, hollow tiles or other props that may crumble under continuous load. Never work under a vehicle that is supported solely by a jack. Never work under the vehicle while the engine is running.
- For vehicles equipped with an anti-theft radio, be sure of the correct radio activation code before disconnecting the battery or removing the radio. If the wrong code is entered when the power is restored, the radio may lock up and become inoperable, even if the correct code is used in a later attempt.
- If you are going to work under a vehicle on the ground, make sure that the ground is level. Block the wheels to keep the vehicle from rolling. Disconnect the battery negative terminal (ground strap) to prevent others from starting the vehicle while you are under it.
- Do not attempt to work on your vehicle if you do not feel well. You increase the danger of injury to yourself and others if you are tired, upset or have taken medicine or any other substances that may impair you or keep you from being fully alert.
- Never run the engine unless the work area is well ventilated. Carbon monoxide (CO) kills.
- Always observe good workshop practices. Wear goggles when you operate machine tools or work with acid. Wear goggles, gloves and other protective clothing whenever the job requires working with harmful substances.
- Tie long hair behind your head. Do not wear a necktie, a scarf, loose clothing, or a necklace when you work near machine tools or running engines. If your hair, clothing, or jewelry were to get caught in the machinery, severe injury could result.
- Do not re-use any fasteners that are worn or deformed in normal use. Some fasteners are designed to be used only once and are unreliable and may fail if used a second time. This includes, but is not limited to, nuts, bolts, washers, circlips and cotter pins. Always follow the recommendations in this manual - replace these fasteners with new parts where indicated, and any other time it is deemed necessary by inspection.



Cautions & Warnings

- Illuminate the work area adequately but safely. Use a portable safety light for working inside or under the vehicle. Make sure the bulb is enclosed by a wire cage. The hot filament of an accidentally broken bulb can ignite spilled fuel or oil.
- Friction materials such as brake pads and clutch discs may contain asbestos fibers. Do not create dust by grinding, sanding, or by cleaning with compressed air. Avoid breathing asbestos fibers and asbestos dust. Breathing asbestos can cause serious diseases such as asbestosis or cancer, and may result in death.
- Finger rings should be removed so that they cannot cause electrical shorts, get caught in running machinery, or be crushed by heavy parts.
- Before starting a job, make certain that you have all the necessary tools and parts on hand. Read all the instructions thoroughly; do not attempt shortcuts. Use tools that are appropriate to the work and use only replacement parts meeting Volkswagen specifications. Makeshift tools, parts and procedures will not make good repairs.
- Catch draining fuel, oil or brake fluid in suitable containers. Do not use empty food or beverage containers that might mislead someone into drinking from them. Store flammable fluids away from fire hazards. Wipe up spills at once, but do not store the oily rags, which can ignite and burn spontaneously.
- Use pneumatic and electric tools only to loosen threaded parts and fasteners. Never use these tools to tighten fasteners, especially on light alloy parts. Always use a torque wrench to tighten fasteners to the tightening torque listed.
- Keep sparks, lighted matches, and open flame away from the top of the battery. If escaping hydrogen gas is ignited, it will ignite gas trapped in the cells and cause the battery to explode.
- Be mindful of the environment and ecology. Before you drain the crankcase, find out the proper way to dispose of the oil. Do not pour oil onto the ground, down a drain, or into a stream, pond, or lake. Consult local ordinances that govern the disposal of wastes.
- The air-conditioning (A/C) system is filled with a chemical refrigerant that is hazardous. The A/C system should be serviced only by trained automotive service technicians using approved refrigerant recovery/recycling equipment, trained in related safety precautions, and familiar with regulations governing the discharging and disposal of automotive chemical refrigerants.
- Before doing any electrical welding on vehicles equipped with anti-lock brakes (ABS), disconnect the battery negative terminal (ground strap) and the ABS control module connector.
- Do not expose any part of the A/C system to high temperatures such as open flame. Excessive heat will increase system pressure and may cause the system to burst.
- When boost-charging the battery, first remove the fuses for the Engine Control Module (ECM), the Transmission Control Module (TCM), the ABS control module, and the trip computer. In cases where one or more of these components is not separately fused, disconnect the control module connector(s).
- Some of the vehicles covered by this manual are equipped with a supplemental restraint system (SRS), that automatically deploys an airbag in the event of a frontal impact. The airbag is operated by an explosive device. Handled improperly or without adequate safeguards, it can be accidentally activated and cause serious personal injury. To guard against personal injury or airbag system failure, only trained Volkswagen Service technicians should test, disassemble or service the airbag system.

Cautions & Warnings

- Do not quick-charge the battery (for boost starting) for longer than one minute, and do not exceed 16.5 volts at the battery with the boosting cables attached. Wait at least one minute before boosting the battery a second time.
- Never use a test light to conduct electrical tests of the airbag system. The system must only be tested by trained Volkswagen Service technicians using the VAG 1551 Scan Tool (ST) or an approved equivalent. The airbag unit must never be electrically tested while it is not installed in the vehicle.
- Some aerosol tire inflators are highly flammable. Be extremely cautious when repairing a tire that may have been inflated using an aerosol tire inflator. Keep sparks, open flame or other sources of ignition away from the tire repair area. Inflate and deflate the tire at least four times before breaking the bead from the rim. Completely remove the tire from the rim before attempting any repair.
- When driving or riding in an airbag-equipped vehicle, never hold test equipment in your hands or lap while the vehicle is in motion. Objects between you and the airbag can increase the risk of injury in an accident.

I have read and I understand these Cautions and Warnings.