


66-31

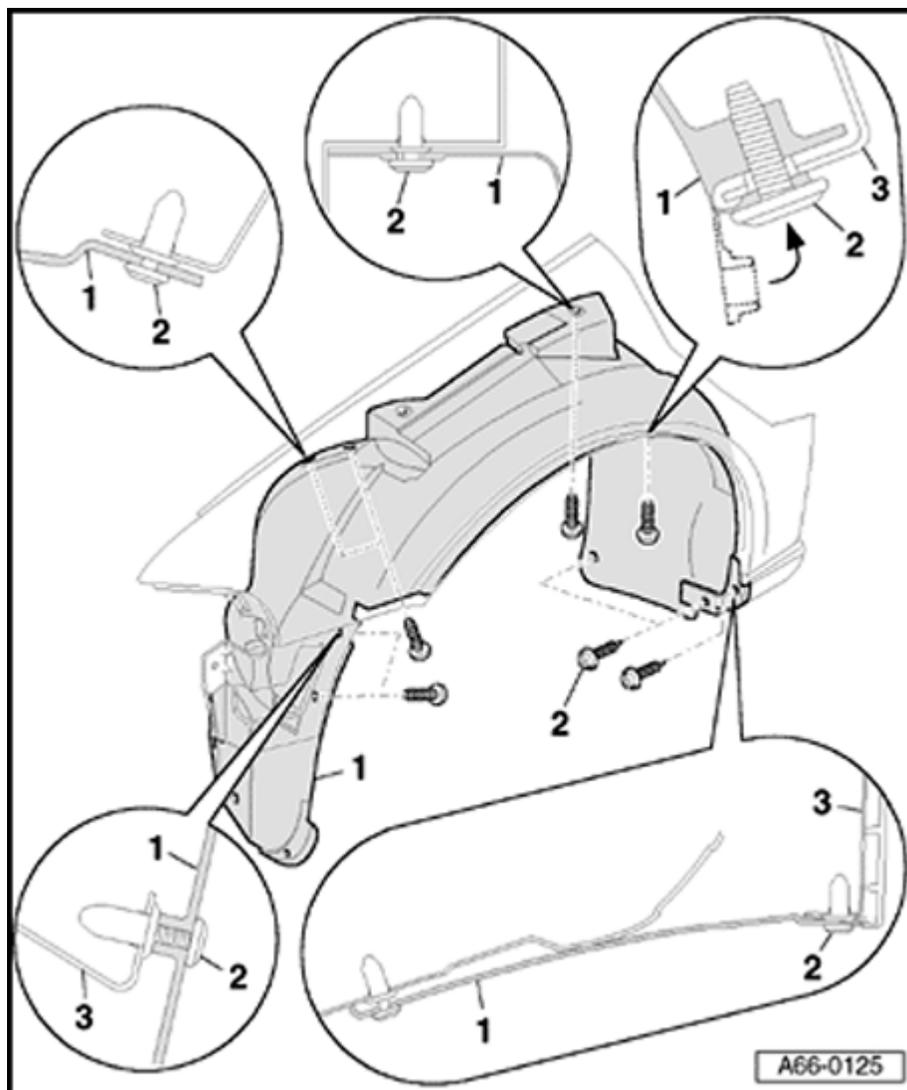

Front wheelhousing liner, removing and installing

1 - Front wheelhousing liner

◆ Front wheel removed.

- To remove, remove bolts -2- (10x) and remove wheelhousing liner below fender.

- When installing, press plastic tabs (dotted line in illustration) in direction of arrow into the holes on fender and then install Phillips-head screws.

2 - Phillips-head screws

◆ 2.5 Nm

3 - Fender